

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)


1. oil well ☐ gas well ☒ other2. NAME OF OPERATOR
Dugan Production Corp.3. ADDRESS OF OPERATOR
Box 208, Farmington, NM 874014. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 790' FSL - 1750' FWL
AT TOP PROD. INTERVAL:
AT TOTAL DEPTH:

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

TEST WATER SHUT-OFF ☐
FRACTURE TREAT ☐
SHOOT OR ACIDIZE ☐
REPAIR WELL ☐
PULL OR ALTER CASING ☐
MULTIPLE COMPLETE ☐
CHANGE ZONES ☐
ABANDON* ☐
(other) ☐

SUBSEQUENT REPORT OF:

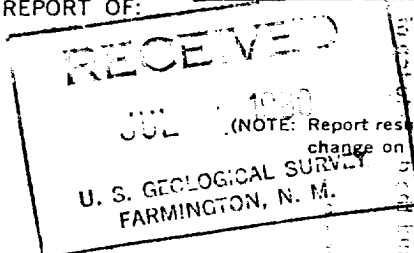

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

6-28-80

Moved in and rigged up Morrow Drilg Rig. Spudded 8-3/4" hole @ 10:00 a.m.
Drld to 82'. Ran 2 jts 7" OD 26# 8R "B" condition casing. TE 81.36' set @
82' GL. Cemented w/35 sx class "B" cement. Circulated to surface. WOC

7-3-80

TD 1520'. Ran 49 jts 2-7/8" OD 6.5# J-55 10V Elle tbg for cs. TE 1507' 96'
set @ 1507' GL. Reciprocated pipe. Had good circulation while cementing.
Cemented w/75 sx 2% lodense followed by 50 sx neat. Circulated trace of cement
to surface. Bumped plug w/1250 psi. Released to 1000 psi. Shut in. POB
12:20 p.m. 7-3-80.

Subsurface Safety Valve: Manu. and Type _____

18. I hereby certify that the foregoing is true and correct

SIGNED

Jim L. Jacobs

TITLE Geologist

DATE

(This space for Federal or State office use)

APPROVED BY

CONDITIONS OF APPROVAL, IF ANY:

TITLE

DATE

NM000

ACCEPTED FOR RECORD
JUL 1980
FARMINGTON DISTRICT