

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

## APPLICATION FOR PERMIT TO DRILL, DEEPEN, OR PLUG BACK

## 1a. TYPE OF WORK

DRILL ☒DEEPEN ☐PLUG BACK ☐

## b. TYPE OF WELL

OIL  
WELL ☐GAS  
WELL ☒

OTHER

SINGLE  
ZONE ☒MULTIPLE  
ZONE ☐

## 2. NAME OF OPERATOR

GULF OIL CORPORATION

## 3. ADDRESS OF OPERATOR

P. O. Box 670, Hobbs, New Mexico 88240

## 4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.)\*

At surface

990' FSL &amp; 1120' FWL

At proposed prod. zone

## 14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE\*

11 miles south Bloomfield, New Mexico

## 15. DISTANCE FROM PROPOSED\*

LOCATION TO NEAREST  
PROPERTY OR LEASE LINE, FT.  
(Also to nearest drlg. unit line, if any)

## 16. NO. OF ACRES IN LEASE

2560

17. NO. OF ACRES ASSIGNED  
TO THIS WELL

160

18. DISTANCE FROM PROPOSED LOCATION\*  
TO NEAREST WELL, DRILLING, COMPLETED,  
OR APPLIED FOR, ON THIS LEASE, FT.

## 19. PROPOSED DEPTH

2100'

## 20. ROTARY OR CABLE TOOLS

Rotary

## 21. ELEVATIONS (Show whether DF, RT, GR, etc.)

6580.3' GL

## 22. APPROX. DATE WORK WILL START\*

September 15, 1980

## 23.

## PROPOSED CASING AND CEMENTING PROGRAM

SIZE OF HOLE	SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	QUANTITY OF CEMENT
9-5/8"	7-5/8"	24#	90'	Circulated (approx 100 sx)
6-1/2"	2-7/8"	6.5#	2100'	Circulated (approx 500 sx)

Mud Program: 0' - 90'  
90' - 2,100'Fresh water spud mud  
Fresh water low solid mud with the following properties:  
Viscosity 32-37 sec., water loss 20-4 cc, weight 8.5 -  
9.0 ppg.

Gas is not dedicated.

IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: If proposal is to deepen or plug back, give data on present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer program, if any.

## 24.

SIGNED

*R. C. Anderson*

TITLE Area Production Manager

DATE 8-14-80

(This space for Federal or State office use)

PERMIT NO.

APPROVAL DATE

APPROVED BY

*Bruce Wamodey*

TITLE

DATE

CONDITIONS OF APPROVAL, IF ANY:

\*See Instructions On Reverse Side

NEW MEXICO OIL CONSERVATION COMMISSION  
WELL LOCATION AND ACREAGE DEDICATION PLAT

Form C-102  
Supersedes C-12  
Effective 1-1-65

All distances must be from the outer boundaries of the Section.


Operator <b>GULF OIL CORPORATION</b>			Lessee <b>SCOTT "E" FEDERAL COM</b>		Well No. <b>19</b>
Unit Letter <b>M</b>	Section <b>22</b>	Township <b>27 NORTH</b>	Range <b>11 WEST</b>	County <b>SAN JUAN</b>	
Actual Footage Location of Well: <b>990</b> feet from the <b>SOUTH</b> line and <b>1120</b> feet from the <b>WEST</b> line					
Ground Level Elev. <b>6580.3</b>	Producing Formation <b>West Kutz</b>		Pool <b>West Kutz Pictured Cliffs</b>		Dedicated Acreage: <b>160</b> Acres

1. Outline the acreage dedicated to the subject well by colored pencil or hatchure marks on the plat below.
2. If more than one lease is dedicated to the well, outline each and identify the ownership thereof (both as to working interest and royalty).
3. If more than one lease of different ownership is dedicated to the well, have the interests of all owners been consolidated by communization, unitization, force-pooling, etc?

☐ Yes ☐ No If answer is "yes," type of consolidation \_\_\_\_\_

If answer is "no," list the owners and tract descriptions which have actually been consolidated. (Use reverse side of this form if necessary.) \_\_\_\_\_

No allowable will be assigned to the well until all interests have been consolidated (by communization, unitization, forced-pooling, or otherwise) or until a non-standard unit, eliminating such interests, has been approved by the Commission.

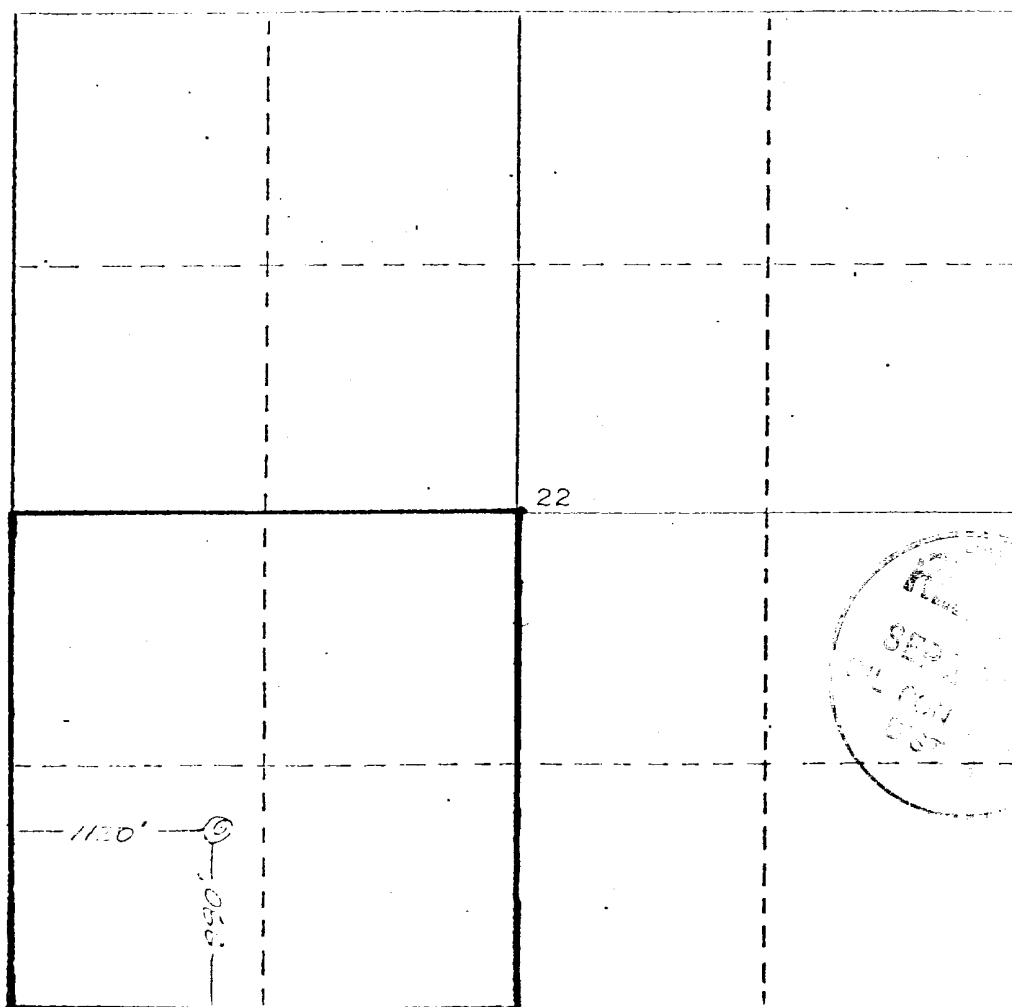

CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief.

*R. C. Anderson*

Name

**R. C. Anderson**

Position

**Area Production Manager**


Company

**Gulf Oil Corporation**

Date

**August 14, 1980**

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision and that the same is true and correct to the best of my knowledge and belief.



Date Surveyed

**July 28, 1980**


Registered Professional Engineer and/or Land Surveyor

*James P. Leese*  
**James P. Leese**

Certificate No.

**1463**

ADDITIONS - DELETIONS - CHANGES SPECIFY

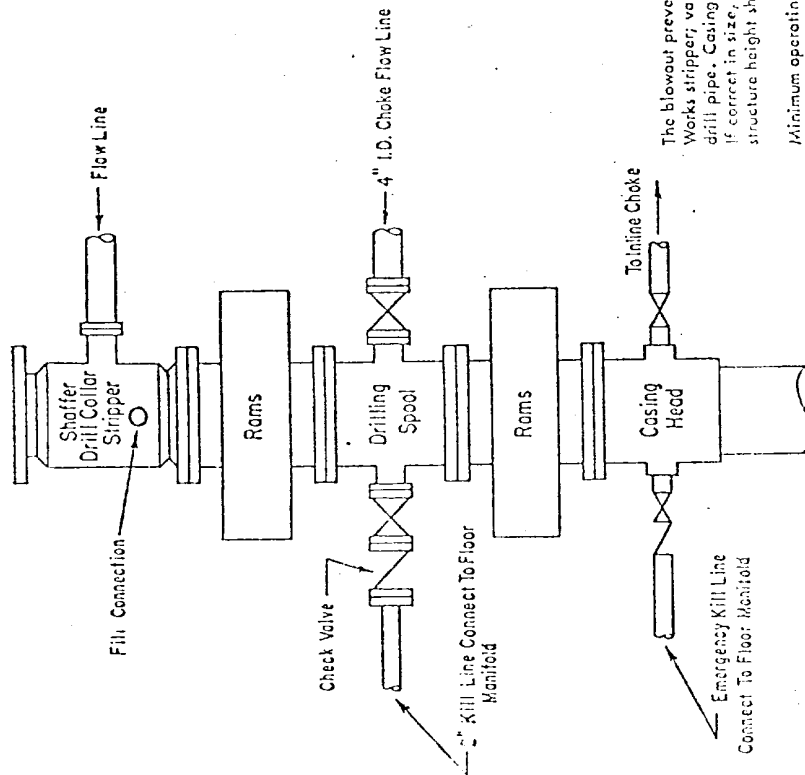

The blowout preventer assembly shall consist of one blind ram preventer and one pipe ram preventer, both hydraulically operated; a Shaffer Tool Works stripper, valves, chokes and connections, as illustrated. If a tapered drill string is used, a ram preventer must be provided for each size of drill pipe. Casing and tubing rams to fit the preventers are to be available as needed. The ram preventers may be two singles or a double type. If correct in size, the flanged outlets of the ram preventer may be used for connecting to the 4-inch I.D. choke flow line and kill line. The substructure height shall be sufficient to install a rotating blowout preventer.

Minimum operating equipment for the preventers shall be as follows: (1) Pump (s), driven by a continuous source of power, capable of closing all the pressure-operated devices simultaneously within \_\_\_\_\_ seconds. The pump (s) is to be connected to a closed type hydraulic operating system. (2) When requested, accumulators with a precharge of nitrogen of not less than 750 PSI and connected so as to receive a fluid charge from the above pump (s). With the charging pump (s) shut down, the pressurized fluid volume stored in the accumulators must be sufficient to close all the pressure-operated devices simultaneously within \_\_\_\_\_ seconds; after closure, the remaining accumulator pressure shall be not less than 1000 PSI with the remaining accumulator fluid volume at least \_\_\_\_\_ percent of the original. (3) When requested, an additional source of power, remote and equivalent, is to be available to operate the above pump (s), or there shall be an additional pump (s) operated by separate power and equal in performance capabilities.

The closing manifold shall have a separate control for each pressure-operated device. Controls are to be labeled, with control handles indicating open and closed positions. A pressure reducer and regulator must be provided if a Hydril preventer is used. Gulf Legion No. 38 hydraulic oil, an equivalent or better, is to be used as the fluid to operate the hydraulic equipment.

The choke manifold, choke flow line, and choke lines are to be supported by metal stands and adequately anchored. The choke flow line and choke lines shall be constructed as straight as possible and without sharp bends. Easy and safe access is to be maintained to the choke manifold. All valves are to be selected for operation in the presence of oil, gas, and drilling fluids. The choke flow line valve connected to the drilling spool and oil ram type preventers must be equipped with stem extensions, universal joints if needed, and hand wheels which are to extend beyond the edge of the derrick substructure. All other valves are to be equipped with handles.

### 3000 PSI WORKING PRESSURE BLOWOUT PREVENTER HOOK-UP

# Gulf Oil Exploration and Production Company

R. C. Anderson  
PRODUCTION MANAGER, HOBBS AREA

August 14, 1980

P. O. Box 670  
Hobbs, NM 88240

U.S. Geological Survey  
P.O. Box 959  
Farmington, New Mexico 87401

Gentlemen:

The following is Gulf Oil Corporation's plan for restoration associated with the drilling of our Scott "E" Federal #19 to be located 990' FSL and 1120' FWL, Section 22, Township 27 North, Range 11 West, San Juan County, New Mexico.

After completion of drilling and/or completion operations, all equipment and other material not needed for operations will be removed. Pits will be filled and the location cleaned of all trash and junk to leave the well site in as aesthetically pleasing condition as possible. Any unguarded pits containing fluids will be fenced until they are filled.

After abandonment of the well, surface restoration will be in accordance with the agreement with the surface owner. Pits will be filled and the location will be cleaned. The pit area, well pad and all unneeded access roads will be ripped to promote revegetation. Rehabilitation should be accomplished within (90) days after abandonment.

Yours very truly,

  
R. C. Anderson

RLV/tdp

Subscribed and sworn to before me this \_\_\_\_\_ day of August, 1980



A DIVISION OF GULF OIL CORPORATION

# Gulf Oil Exploration and Production Company

R. C. Anderson  
PRODUCTION MANAGER, HOBBS AREA

August 14, 1980

P. O. Box 670  
Hobbs, NM 88240

Re: Application for Permit to Drill  
Scott "E" Federal #19  
San Juan County, New Mexico

U.S.G.S.  
P.O. Box 959  
Farmington, New Mexico 87401

Gentlemen:

We are submitting the information requested in NTL-6 which should accompany application for permit to drill.

Well: Scott "E" Federal #19

1. Location: 990' FSL and 1120' FWL, Section 22, T27N, R11W, San Juan County, New Mexico.
2. Elevation of Unprepared Ground: 6580.3 GL
3. Geologic Name of Surface formation: Ojo Alamo Sandstone
4. Type Drilling Tools: Rotary
5. Proposed Drilling Depth: 2100'
6. Estimated Tops of Geologic Markers: Fruitland 1/10'; Pictured Cliffs 2000' - 2075'
7. Estimated Depths at Which Anticipated Gas or Oil-Bearing Formations Expected: Pictured Cliffs 2000' to 2075'
8. Casing Program and Setting Depths:

	<u>Size</u>	<u>Weight</u>	<u>Grade</u>	<u>Setting Depth</u>
Surface	7-5/8"	24#	H-40	90'
Production	2-7/8"	6.5#	H-40	2100'

9. Casing Setting Depth and Cementing Program:

- a. Surface casing will be set at 90', cemented with 100 sacks Class "B" neat with 2%  $\text{CaCl}_2$ .

(Continued)



A DIVISION OF GULF OIL CORPORATION

- b. Production casing will be set at 2100' and cemented with 500 sacks Class "B" cement.

NOTE: Volume of cement to be determined after running caliper log at total depth.

10. Pressure Control Equipment: An annular BOP or a double blind and pipe ram BOP will be installed before drilling out below surface casing.

11. Circulating Media:

- a. 0' - 90' Fresh water spud mud  
b. 90' - 2100' Fresh water low solid with the following properties:  
Viscosity 32-37 sec., water loss 20-4 cc, weight 8.5 - 9.0 ppg.

12. Testing, Logging and Coring Programs:

- a. Formation testing may be done at any depth where samples, drilling rate or log information indicated a possible show of oil or gas.  
b. Open hole logs will be run prior to running production casing at total depth.  
c. Coring is not planned.

13. Abnormal Pressure or Temperature and Hydrogen Sulfide Gas: We do not anticipate abnormal pressure, temperature or hydrogen sulfide gas; however, BOP's as described in Item 10 above will be installed.

14. Anticipated Starting Date: Drilling operations should start September 15, 1980.

15. Other Facets of the Proposed Operation: None

  
R. C. ANDERSON  
AREA PRODUCTION MANAGER

# Gulf Oil Exploration and Production Company

R. C. Anderson  
PRODUCTION MANAGER, HOBBS AREA

August 14, 1980

P. O. Box 670  
Hobbs, NM 88240

Re: Surface Development Plan  
Proposed Scott "E" Federal #19  
San Juan County, New Mexico

U. S. Geological Survey  
P. O. Box 959  
Farmington, New Mexico 87401

Gentlemen:

The surface use and operations plan for the proposed Scott "E" Federal #19 is as follows:

1. Existing Roads:

- A. Exhibit "A" is a portion of a general highway map showing the location of the proposed well as staked. Go south out of Bloomfield, New Mexico, Approximately 11 miles on State Highway No. 44, turn west and go .8 miles, turn north .5 miles, turn east 200' to the proposed location. The proposed location is approximately 200' east of the north-south road.
- B. Exhibit "B" is a plat showing all existing roads within a one-mile radius of the wellsite, as well as the planned access road.

2. Planned Access Roads:

- A. Length and Width: The required new road will be 200' long and 12' wide, constructed of grade surface material compacted and watered to a depth of 6". The new road will leave existing road and extend to the southwest corner of the drilling pad. This new road is labeled and color-coded red on Exhibits "A" and "B".
- B. Turnouts: None required
- C. Culverts: None required
- D. Cuts and Fills: No significant cuts or fills will be required in the road.
- E. Gates and Cattleguards: None required

(Continued)



A DIVISION OF GULF OIL CORPORATION

3. Location of Existing Wells: There are a number of existing wells around the proposed location as shown on Exhibit "A".
4. Tank Batteries, Production Facilities and Lease Pipelines: There are no tank batteries, production facilities or lease pipelines on this lease operated or owned by Gulf Oil Corporation. If production is encountered, the tank battery and other required producing equipment will be located 200' south of the well. All producing lines will be constructed on the pad on top of the ground. Refer to Exhibit "D".
5. Water Supply: Drilling Water will be hauled by trucks over existing roads.
6. Source of Construction Materials: The proposed roads and drilling pad will be constructed by leveling and compacting existing surface materials (mainly sand and clay). No outside materials will be hauled in for construction of roads or drilling pad.
7. Methods of Handling Waste Disposal:
  - A. Drill cuttings will be disposed of in the drilling pits.
  - B. Drilling fluids will be allowed to evaporate in drilling pits until pits are dry.
  - C. Water produced during tests will be disposed of in drilling pits. Oil produced during tests will be stored in test tanks until sold.
  - D. Current laws and regulations pertaining to disposal of human waste will be complied with.
  - E. Trash, waste paper, sacks, garbage and junk will be burned or buried in a separate trash pit and covered with a minimum of 24 inches of dirt. All waste material will be contained to prevent scattering by the wind. Location of trash pit is shown on Exhibit "C".
  - F. All trash and debris will be buried or removed from wellsite within 30 days after finishing drilling and/or completion operations.
8. Ancillary Facilities: None required
9. Wellsite Layout:
  - A. Exhibit "C" shows the relative location and dimensions of the well pad, mud pits, reserve pits, trash pits, and location of major rig components.
  - B. Construction of drilling pad will require a cut of 2 feet on the east side, with the cut material being moved to the west side to be used as fill.
  - C. The reserve pit will be on the west side of pad.
  - D. The wellsite has been staked.

(Continued)



10. Plans for Restoration of Surface:

- A. After completion of drilling and/or completion operations, all equipment and other material not needed for operations will be removed. Pits will be filled and location cleaned of all trash and junk to leave wellsite in as aesthetically pleasing condition as possible.
- B. Any unguarded pits containing fluids will be fenced until they are filled.
- C. After abandonment, any special rehabilitation and/or revegetation requirements (reseed with seed mixture No. 2) will be complied with and accomplished as expeditiously as possible. All pits should be filled and leveled within 90 days after abandonment.

11. Other Information:

- A. Topography: Location is in a gently sloping area.
- B. Soil: Soil is sandy loam.
- C. Flora and Fauna: The vegetative cover generally consists of sagebrush, blue gramma and galleta.
- D. Ponds and Streams: There are no streams or ponds in the immediate area.
- E. Residences and Other Structures: None near.
- F. Land Use: Present land use is grazing.
- G. Surface Ownership: Wellsite is on Federal Surface.

12. Operators Representative: Gulf Oil Exploration and Production Company  
A Division of Gulf Oil Corporation  
P. O. Box 670, Hobbs, New Mexico 88240  
Telephone: (505) 393-4121  
Area Production Manager: R. C. Anderson

13. Certification:

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drillsite and access route; that I am familiar with the conditions which presently exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed by Gulf Oil Corporation and its contractors and subcontractors in conformity with this plan the terms and conditions under which it is approved.

  
R. C. Anderson  
Area Production Manager

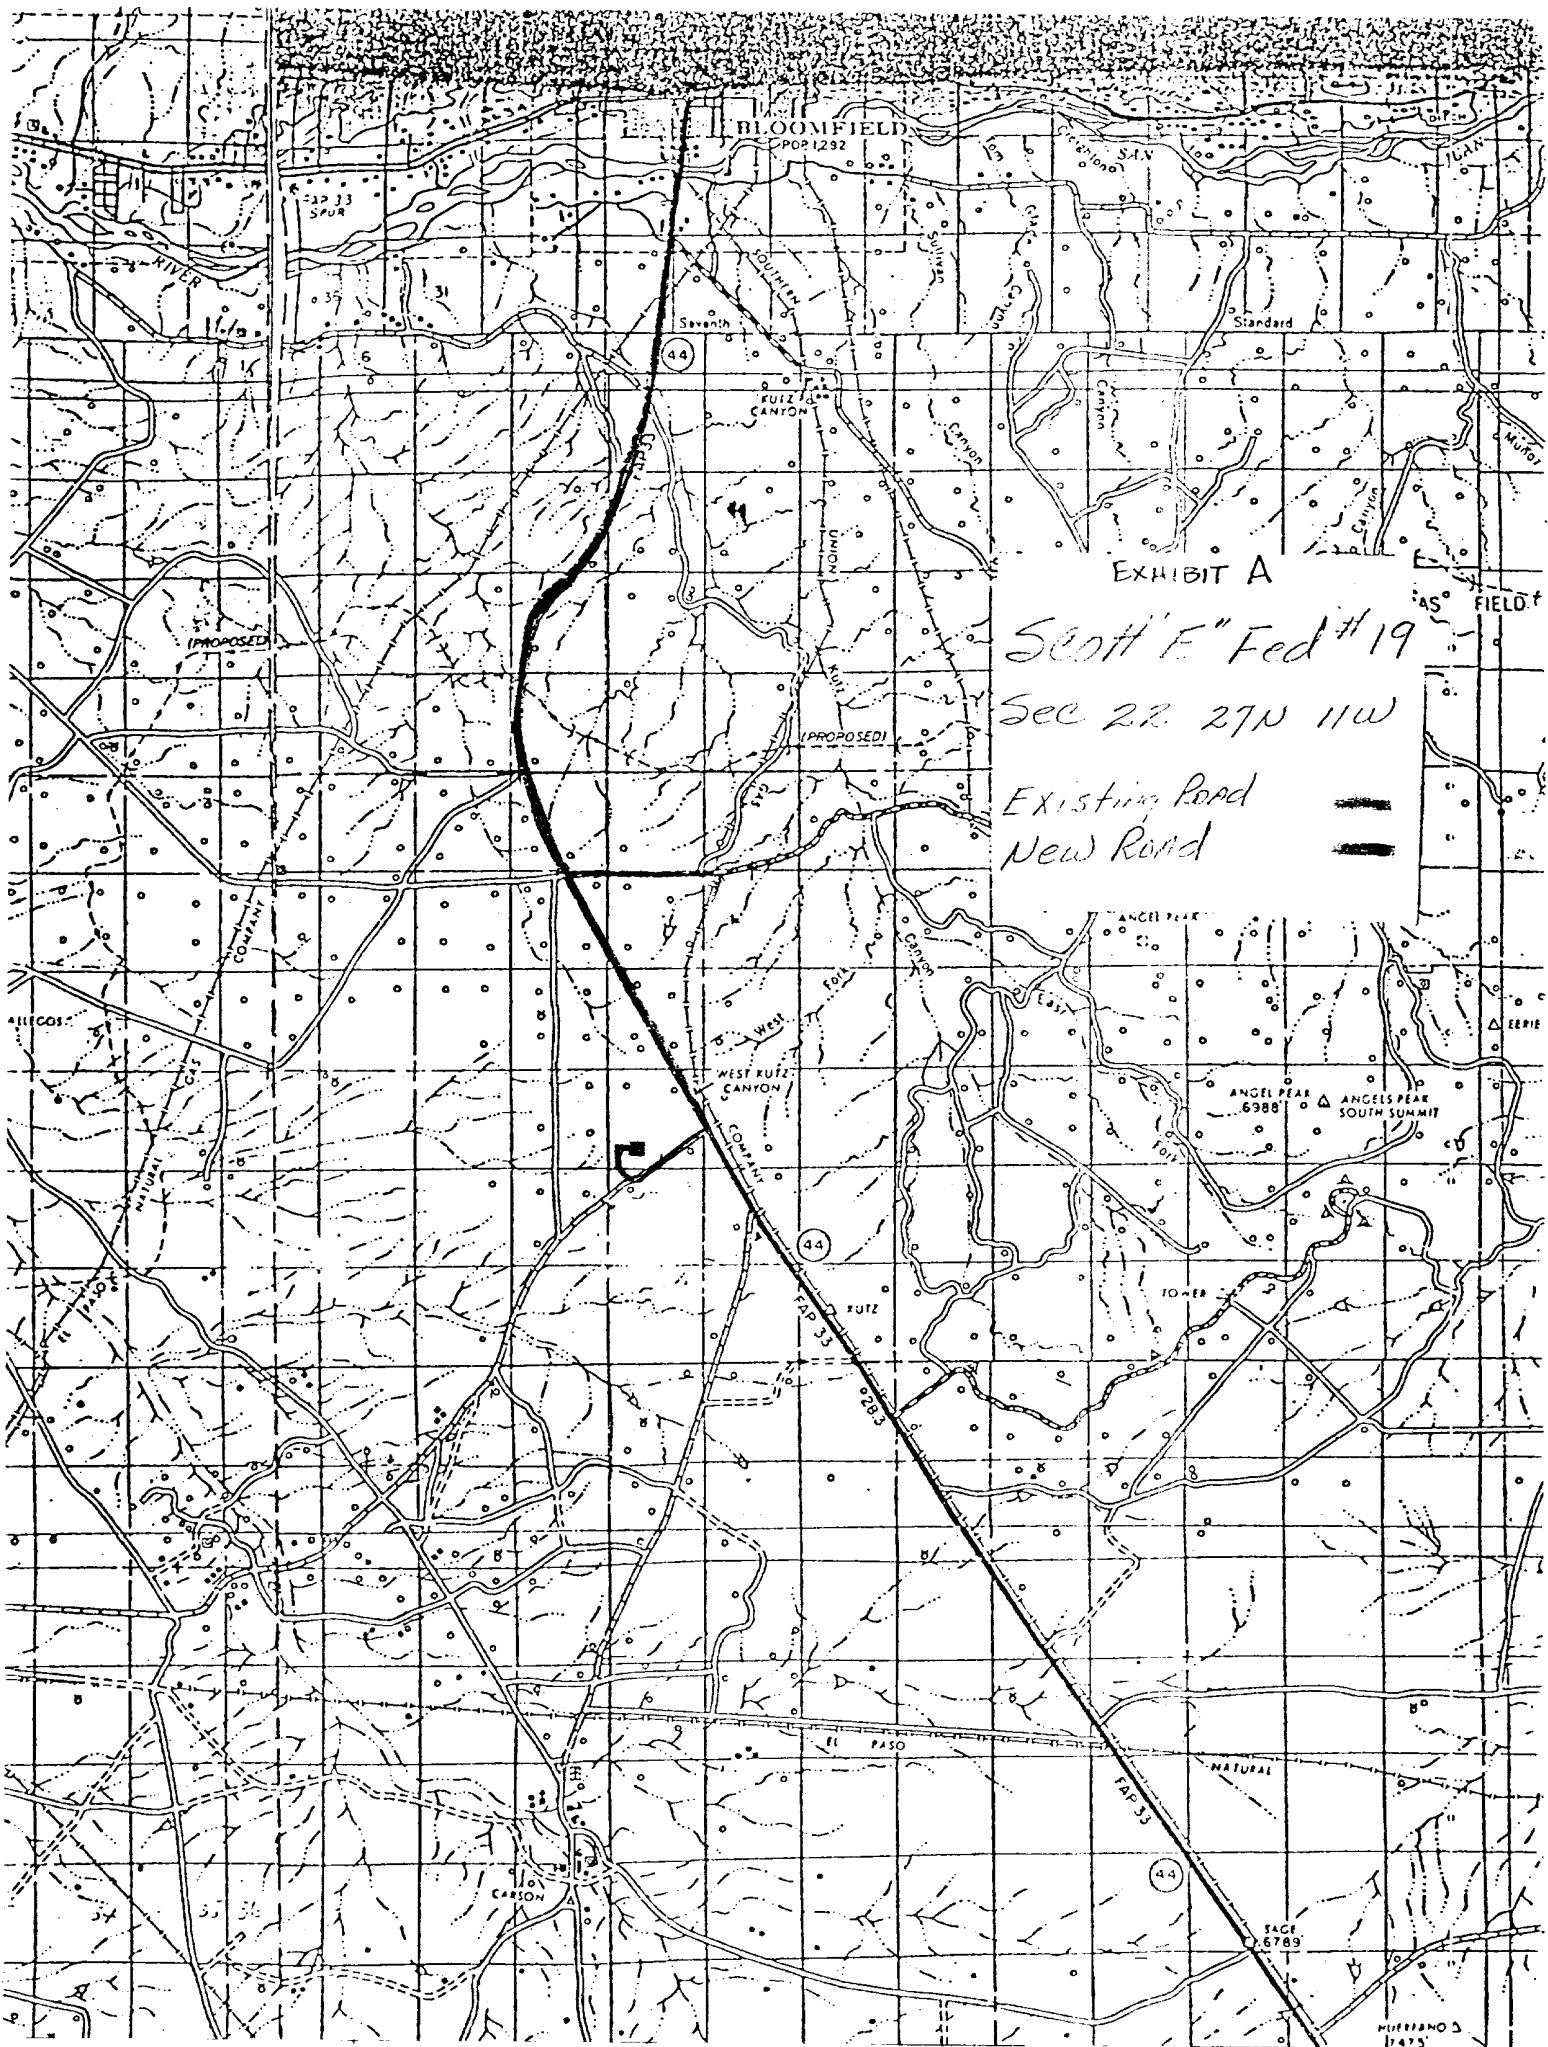


EXHIBIT A

SEOTT E "Fed" 19

Sec 22 27N 11W

Existing Road

New Road



MURRIANO 3  
17475

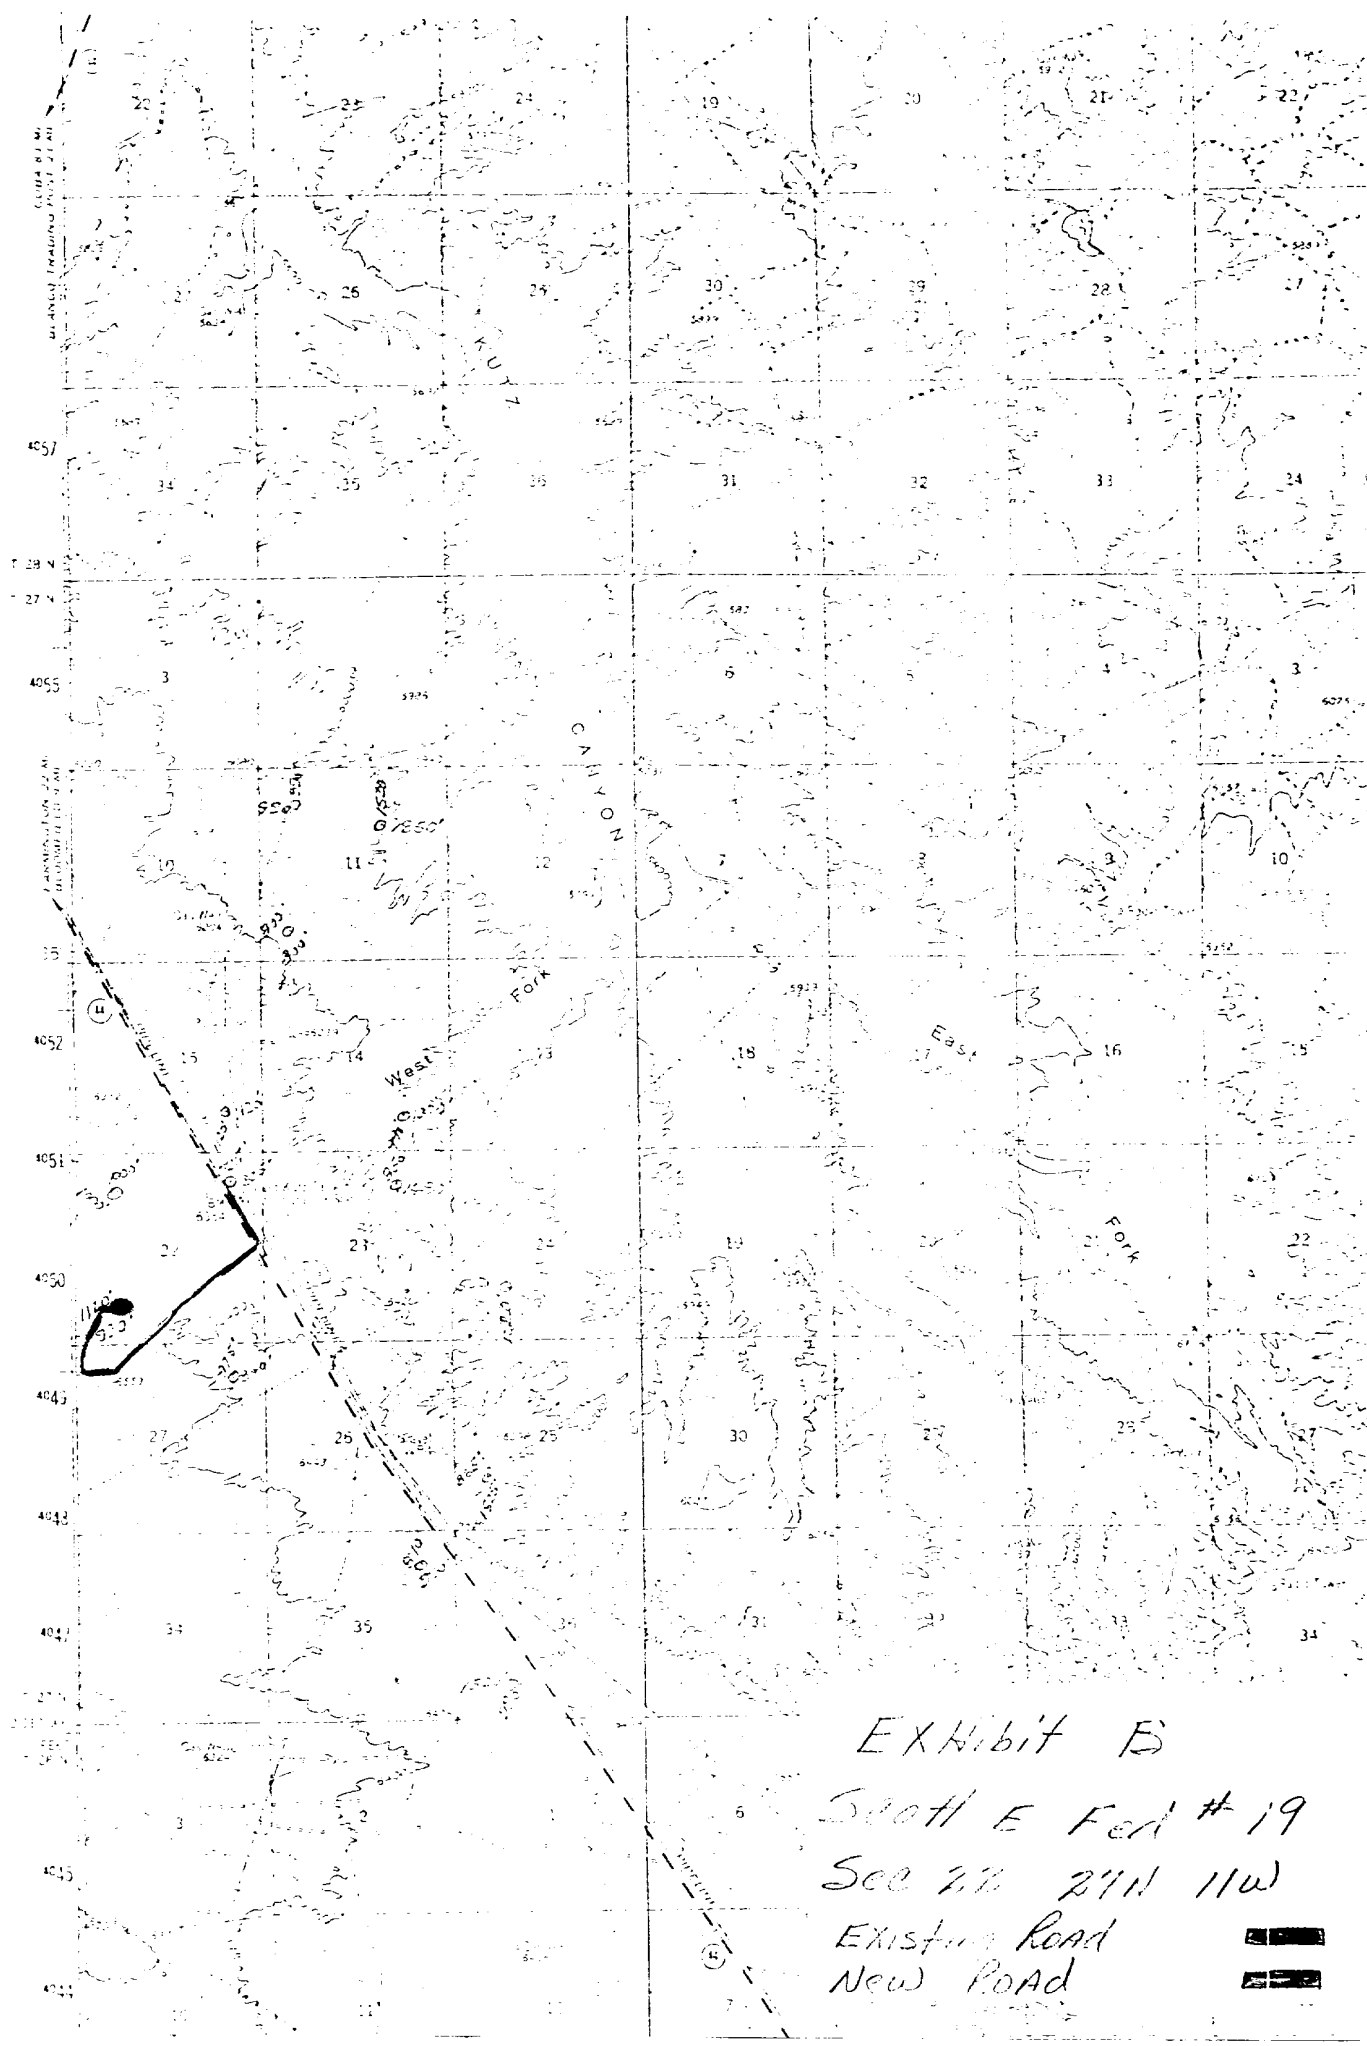


EXHIBIT B  
SCOTT E Fed # 19  
SEC 21 27N 11W  
Existing Road  
New Road

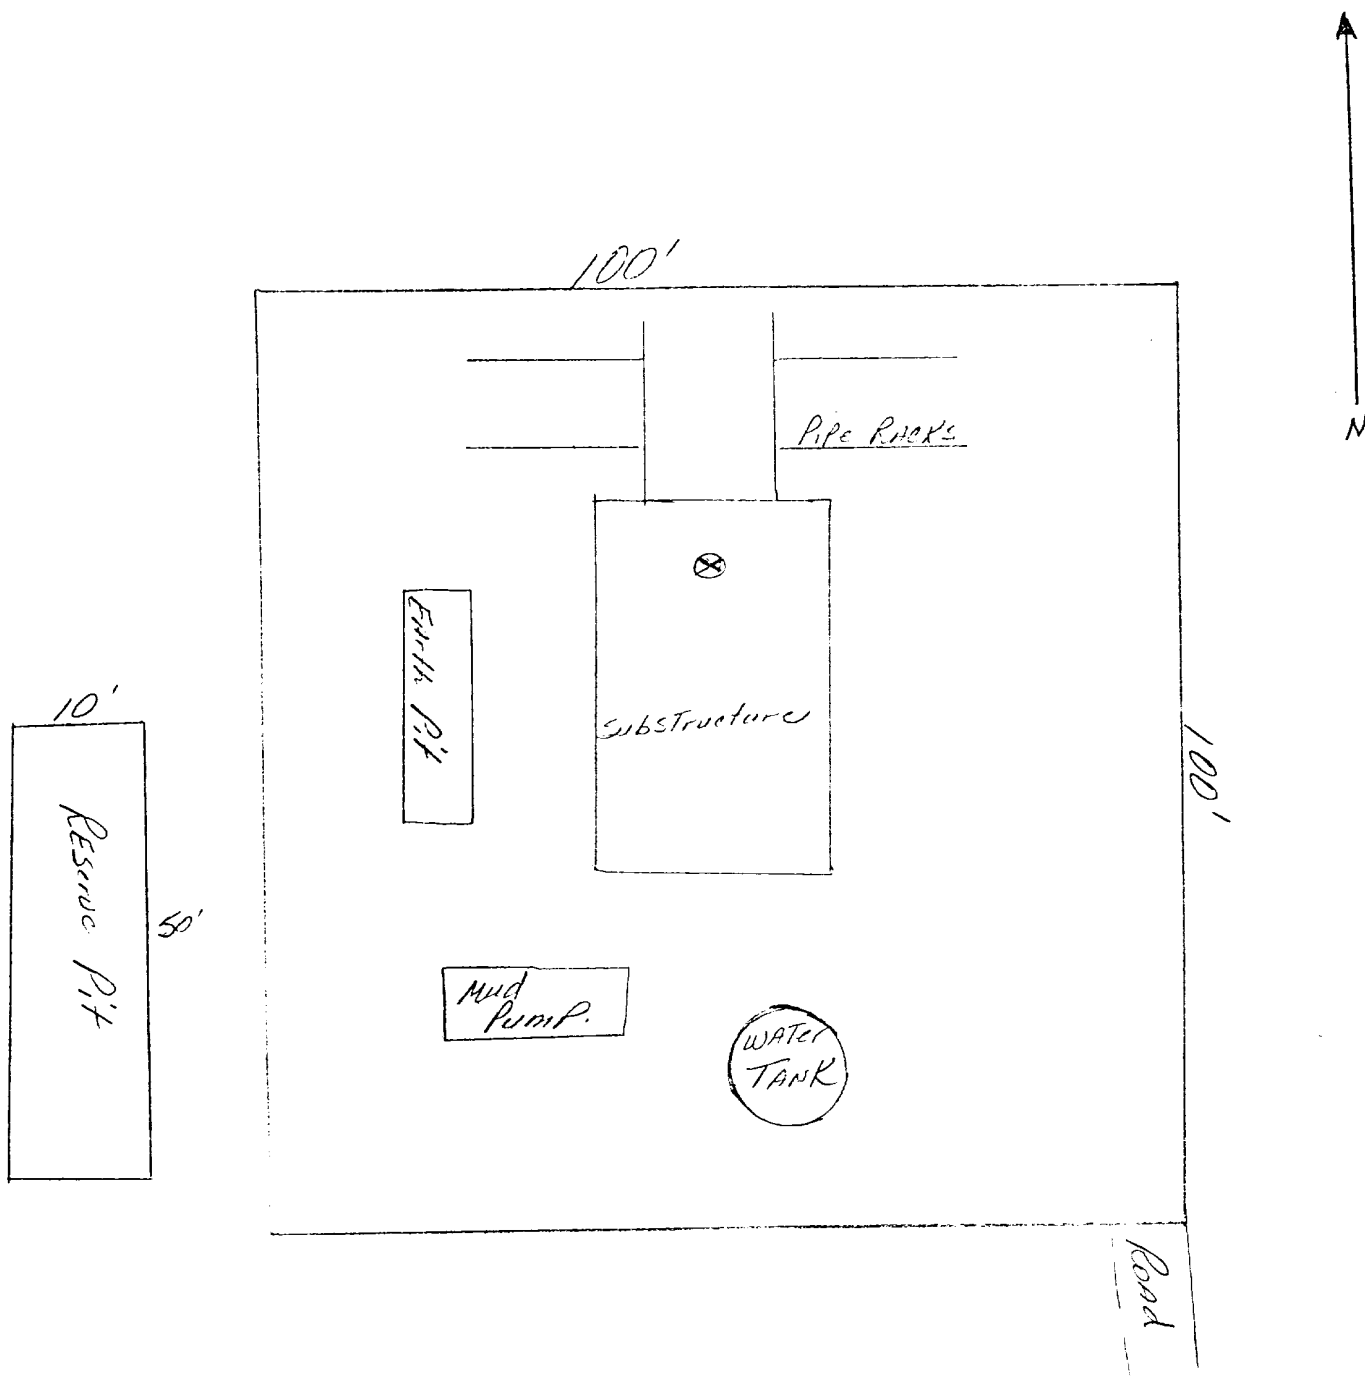


EXHIBIT C  
SCOTT E Fed #19  
SEC 22 27N 11W

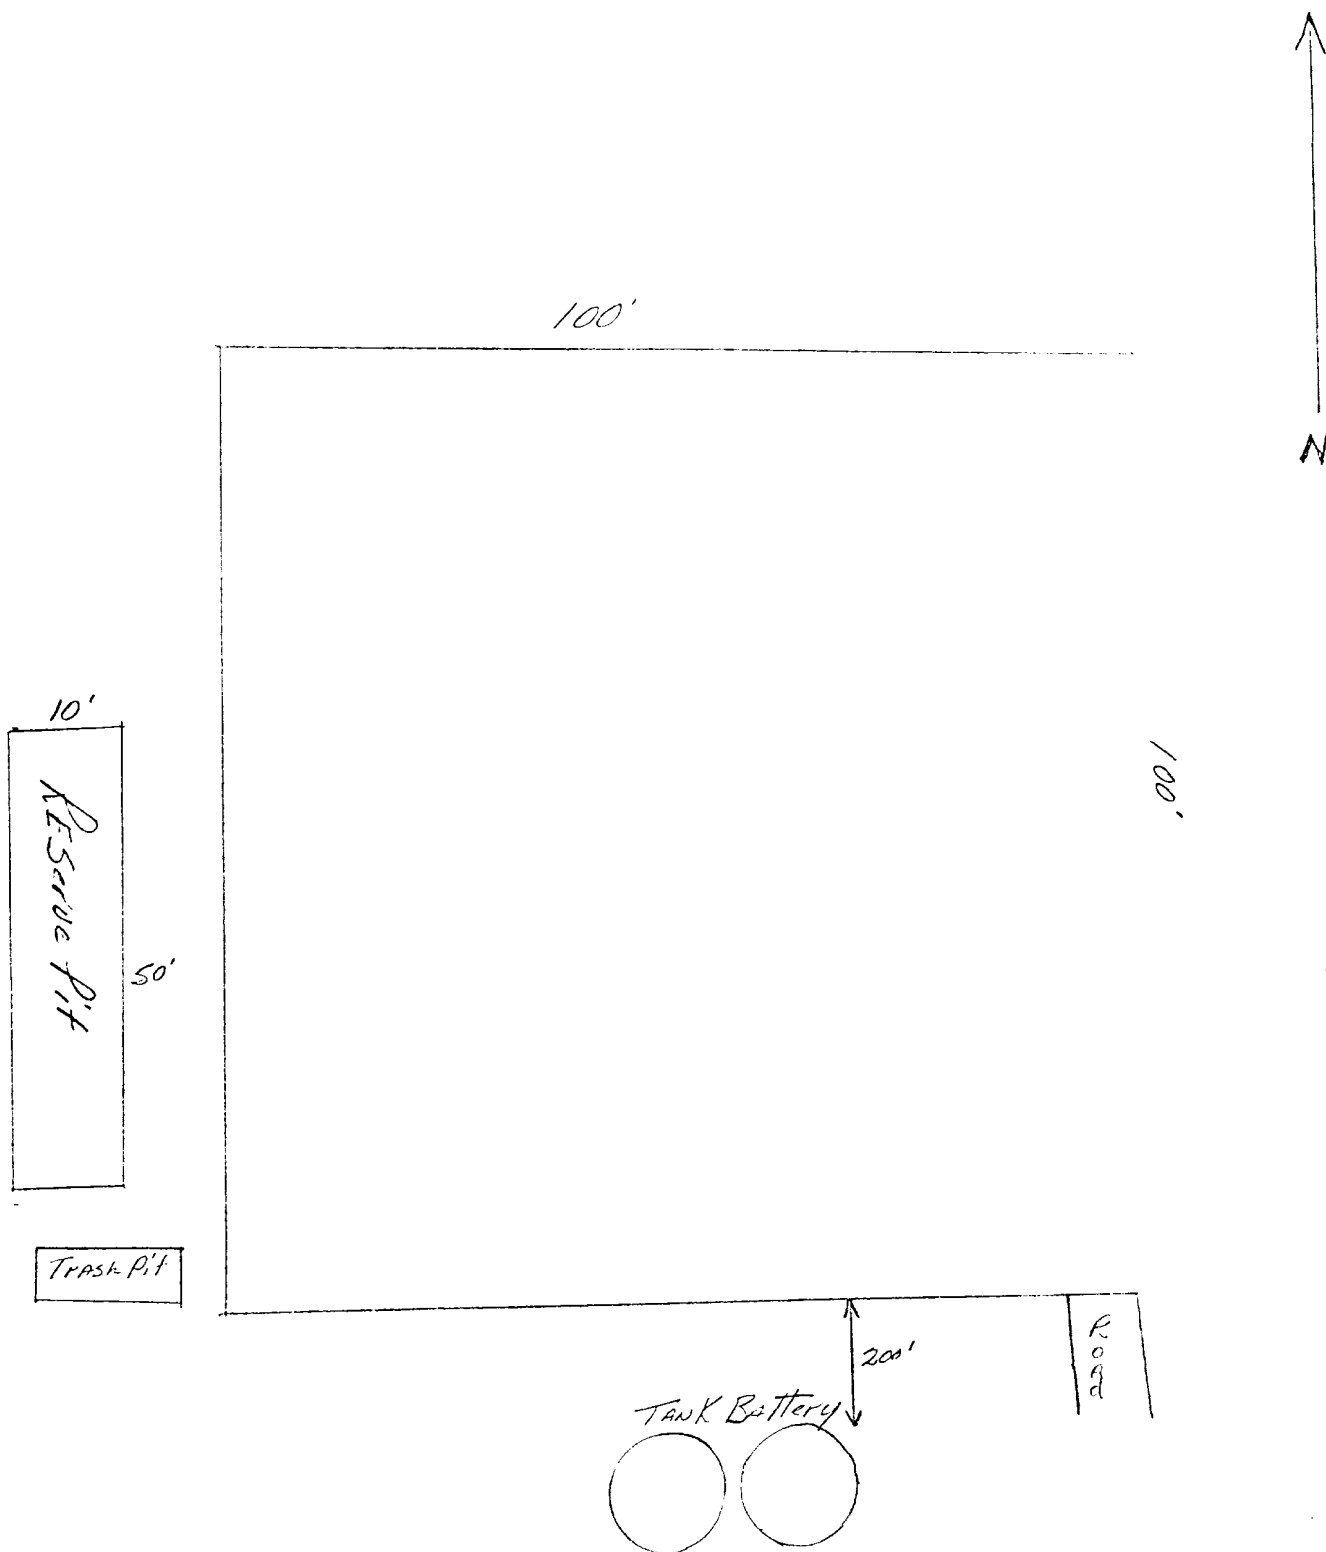


Exhibit "D"

SCOTT "E" Fed # 19

Sec 22. 27N 11W