Form 3160-5 (December 1989)

UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT

FORM APPROVED Budget Bureau No. 1904-0135 Expires: September 30, 1990

5. Lease Designation and Serial No.

SF - 078390

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill Use "APPLICATION FOR	or to deepen or reentry to a different re R PERMIT—" for such proposals	servoir.
SUBMIT	N TRIPLICATE	7. If Unit or CA, Agreement Designation
1. Type of Well OIL WELL GAS WELL OTH 2. Name of Operator	ER (7.57)	8. Well Name and No. Price Com 5
Amoco Production Company	Mary Corley きょう	9. API Well No.
3. Address and Telephone No.	mary oo ley	30-045-24641
P.O. Box 3092 Houston, TX 77253		Basin Dakota/Branco Area Mesaverde
4. Location of Well (Footage, Sec., T., R., M., or Survey	11. County or Parish, State	
1120' FSL & 890' FEL Sec. 11 T2	8N R08W Unit P	San Juan New Mexico
12. CHECK APPROPRIATE BOX(s	s) TO INDICATE NATURE OF NOTI	CE, REPORT, OR OTHER DATA
TYPE OF SUBMISSION	TYP	E OF ACTION
☑ Notice of Intent	Abandonment	Change of Plans
Subsequent Report	Recompletion	New Construction
Final Abandonment Notice	☐ Plugging Back☐ Casing Repair	☑ Non-Routine Fracturing☑ Water Shut-Off
Final Abandonment Notice	Altering Casing	Conversion to Injection
		Mesaverde & Downhole Commingle
	(Note: Report resul Recompletion Rep	ts of multiple completion on Well Completion or ort and Log form.)
13. Describe Proposed or Completed Operations. (Cleawork. If well is directionally drilled, give subsurfa	arly state all pertinent details, and give pertinent are locations and measured and true vertical depti	dates, including estimated date of starting any proposed hs for all markers and zones pertinent to this work.)*
Amoco Production Company reques commingle production downhole wit	t permission to complete the subject h the existing Basin Dakota Pool as	well into the Blanco Mesaverde and per the attach procedure.
The Basin Dakota (71599) & the Bla Commingling. NMOCD order R-1136		Pre-Approved Pools for Downhole
The working interest in the proposed owners are not identical and were no listing of these owners is also attach	tified of this application via certified	vever, overriding and royalty interest mail (return receipt) on July 5, 2000. A
production from the Dakota. That pr	oduction shall serve as a base for pr e of the production will be attributed	using the projected future decline for oduction subtracted from total production to the Blanco Mesaverde. Attached is the
Commingling Production Downhole i remaining production.	n the subject well from the proposed	pools with not reduce the value of the total
14. I hereby certify that the foregoing is true and corre	ect	
Signed May billy	Title Sr. Business Analyst	Date07/05/00
(This space for Federal or State office ase)		ero 31.20
Approved by Conditions of approval, if any:	Title ng LMeer	Date

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

DISTRICT I P.O. Box 1980, Hobbs, NM 88240 DISTRICT_II 311 South First,, Artesia, NM 88210 DISTRICTIII

1000 Rio Brazos Rd., Aztec, NM 87410

2040 South Pacheco, Sante Fe, NM 87505

DISTRICT IV

State of New Mexico Energy, Minerals and Natural Resources Department

OIL CONSERVATION DIVISION

2040 South Pacheco Santa Fe, New Mexico 87505

Form C-102 Revised October 18, 1994 Submit to Appropriate District Office State Lease - 4 Copies Fee Lease · 3 Copies

WELL LOCATION AND ACREAGE DEDICATION PLAT

API Number 30-045	-24641	Pool Code 72319	Pool Name	Blanco Mesaverde		
Property Code 000958	Property Name	Р	rice Com		Well Number 5	
OGRID No. 000778	Operator Name	AMOCO PRO	DDUCTION COMPANY		Elevation 6244' GR	
		0 1				

Surface Location

UL or lot no.	Section	Township	Range	Lot. Idn	Feet from the	North/South Line	Feet from the	East/West Line	County
UNIT P	11	28N	8W		1120'	SOUTH	890'	EAST	San Juan

Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot. Idn	Feet from the	North/South Line	Feet from the	East/West Line	County
Dedicated Acreage	:	Joint or Infill	Cons	olidation Code	Order No.	·			
291.96	6								

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

		OPERATOR CERTIFICATION I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief Signature Printed Name Mary Corley Position
		Sr. Business Analyst Date 06/15/2000 SURVEY CERTIFICATION I hereby certify that the well location shown on this plat was plotted from field notes of actuel surveys made by me or under my supervision, and that the same is true and correct to the best of my knowledge and belief.
. <u>.</u>	890'	3/25/1980 Date of Survey Signature & Seal of Professional Surveyor
		Fred B Kerr Jr Certificate No. 3950


Price Com #5 Recompletion Procedure

Procedure:

- 1. Check anchors. MIRU.
- 2. Check and record tubing, casing, and bradenhead pressures.
- 3. Blow down well. If necessary, kill with 2% KCL water.
- 4. Nipple down WH. NU BOPs. Pressure test to 500 psi.
- 5. Tag and tally OH with 2-3/8" production tubing set at 7090'.
- 6. TIH with bit and scraper for 4-1/2" casing to 5400'.
- 7. TIH with tubing-set CIBP. Set CIBP at 5350'. Load hole with 2% KCL. TOH.
- 8. RU WL. Run CBL over MV interval (4300' 5300') to ensure zonal isolation across the MV.
- 9. Pressure test casing to 1500 psi.
- 10. RIH with 3-1/8" casing guns with Schlumberger's Prospector, select-fire charge. Perforate Lower Menefee/Point Lookout formation (correlate to GR log): 4885', 4895', 4945', 4965', 4978', 4985', 5022', 5030', 5040', 5050', 5058', 5073', 5100', 5115', 5128', 5148', 5160', 5180'
- 11. RU frac equipment and install wellhead isolation tool. Use 2% KCL/N2 foam in fracture stimulation.
- 12. Spearhead 500 gal 15% HCL, establish injection rate, and proceed with fracture stimulation according to Schlumberger schedule.
- 13. Immediately after frac job, RU WL unit and lubricator.
- 14. RIH and set CIBP between Cliffhouse and Menefee at 4830'.
- 15. RIH with 3-1/8" casing guns with Schlumberger's Prospector, select-fire charge. Perforate Cliffhouse/Upper Menefee formation (correlate to GR log): 4433', 4450', 4455', 4465', 4480', 4488', 4505', 4512', 4530', 4540', 4550', 4555', 4570', 4590', 4610', 4630', 4650', 4700', 4718', 4750', 4768', 4780', 4795'
- 16. RU frac equipment and install wellhead isolation tool. Use 2% KCL/N2 foam in fracture stimulation.
- 17. Spearhead 500 gal 15% HCL, establish injection rate, and proceed with fracture stimulation according to Schlumberger schedule.
- 18. Flowback frac immediately.
- 19. TIH with tubing and bit. Cleanout fill and drill bridge plugs set at 4830' and 5350'. Cleanout fill to PBTD at 7354'. Blow well dry at PBTD.
- 20. TIH with 2-3/8" production tubing. Land production tubing at 7200'.
- 21. ND BOP's. NU WH. Return well to production and downhole commingle MV and DK production.

Price Com #5

Sec 11, T28N R8W API: 30-045-24641

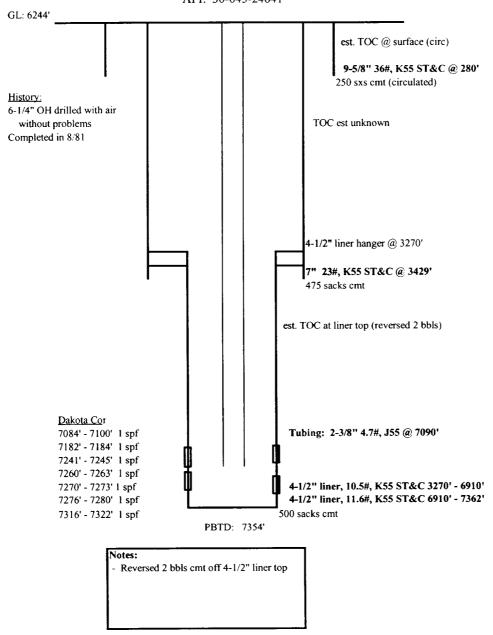

updated: 5/18/00 jad