

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☐ gas ☒ other ☐
well well
2. NAME OF OPERATOR
Southland Royalty Company
3. ADDRESS OF OPERATOR
P.O. Drawer 570, Farmington, N.M. 87401
4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 680' FNL & 1880' FEL
AT TOP PROD. INTERVAL:
AT TOTAL DEPTH:


16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:


TEST WATER SHUT-OFF ☐
FRACTURE TREAT ☐
SHOOT OR ACIDIZE ☐
REPAIR WELL ☐
PULL OR ALTER CASING ☐
MULTIPLE COMPLETE ☐
CHANGE ZONES ☐
ABANDON* ☐
(other) Casing Report ☒

SUBSEQUENT REPORT OF:

☐
☐
☐
☐
☐
☐
☐
☐
☐
☒

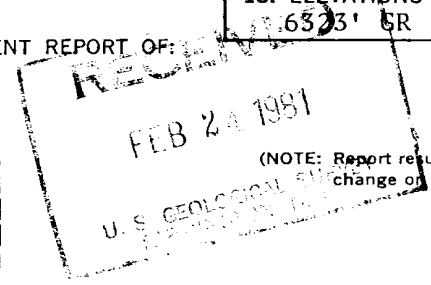

(NOTE: Report results of multiple completion or zone change on Form 9-330.)



5. LEASE
SF-077874
6. IF INDIAN, ALLOTTEE OR TRIBE NAME
7. UNIT AGREEMENT NAME
8. FARM OR LEASE NAME
Hanks
9. WELL NO.
25
10. FIELD OR WILDCAT NAME
Blanco Mesa Verde/Undesignated Chacra
11. SEC., T., R., M., OR BLK. AND SURVEY OR
AREA Section 6, T27N, R9W
12. COUNTY OR PARISH
San Juan
13. STATE
New Mexico
14. API NO.
15. ELEVATIONS (SHOW DF, KDB, AND WD)
6523' GR

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

2/21/81 Ran 119 joints (5017') of 5-1/2", 14#, K-55 casing set at 5029'.
Stage tool at 2587'. Cemented as follows:
Cemented 1st stage with 255 sacks of Class "B" 50/50 Poz with 1/4# gel flake per sack and 6% gel, followed with 80 sacks of Class "B" neat and 2% CaCl₂. Plug down at 8:30 A.M. 2-21-81.
Cemented 2nd stage with 225 sacks of Class "B" 50/50 Poz with 6% gel. Plug down at 1:30 P.M. 2-21-81.
Top of cement at 1650'.

Subsurface Safety Valve: Manu. and Type _____ Set @ _____ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED ACCEPTED FOR RECORD TITLE Drilling Clerk DATE February 23, 1981

(This space for Federal or State office use)

APPROVED BY _____ TITLE _____ DATE _____
CONDITIONS OF APPROVAL, IF ANY:

BY FARMINGTON DISTRICT

—