

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil well gas well other

2. NAME OF OPERATOR
DEPCO, INC

3. ADDRESS OF OPERATOR

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 790' FNL, 790' FWL (NW/4 NW/4)
AT TOP PROD. INTERVAL: Same
AT TOTAL DEPTH: Same

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

- REQUEST FOR APPROVAL TO:
- TEST WATER SHUT-OFF
 - FRACTURE TREAT
 - SHOOT OR ACIDIZE
 - REPAIR WELL
 - PULL OR ALTER CASING
 - MULTIPLE COMPLETE
 - CHANGE ZONES
 - ABANDON*

(other) Subsequent report of operations

SUBSEQUENT REPORT OF
RECEIVED
 MAR 23 1981
 U. S. GEOLOGICAL SURVEY
 FARMINGTON, N. M.

5. LEASE
SF078896

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME
Federal 33

9. WELL NO.
11

10. FIELD OR WILDCAT NAME
West Kutz P.C.

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA
Sec. 33-T27N-R11W


12. COUNTY OR PARISH
San Juan

13. STATE
New Mexico

14. API NO.
30-045-24795

15. ELEVATIONS (SHOW DF, KDB, AND WD)
6211' GR 6223' KB

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

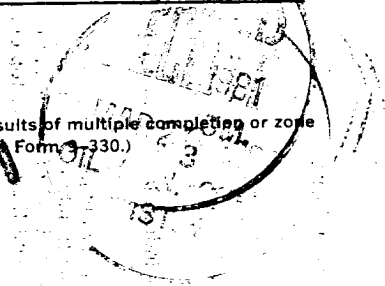

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Spudded 6:30 PM 3-17-81. Drilled 12 1/4" hole to 145'. Ran 3 jts, 127.35' - 8-5/8" 24#, K55, R3, ST&C casing landed @ 139' KB. Cemented w/100 sx Class "B" regular cement, 3% CaCl₂, and one sk flocele. Cement circulated to surface. PD 10:30 PM. WOC 12 hrs.

Drilled 7-7/8" hole to 1915' TD. Ran DIL and CNL/FDC w/GR & Caliper logs. Ran 46 jts, 1890.58', 4 1/2", 10.5#, J55, R3, ST&C casing landed @ 1901' KB. Cemented w/275 sx 50/50 Pozmix, 6% gel, 1/4# celloflake/sx followed by 100 sx Class "B" regular cmt. Good returns thru out. PD 9:35 PM. Rig released 11 PM 3-19-81. WOC.

Subsurface Safety Valve: Manu. and Type _____ Set @ _____ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED *W. F. Shivers* Prod. Spt. Sq. Rk. DATE 3/20/81

(This space for Federal or State office use)

APPROVED BY _____ TITLE _____ DATE _____
CONDITIONS OF APPROVAL, IF ANY:

DEPCO

*See Instructions on Reverse Side

ACCEPTED FOR RECORD

MAR 24 1981

FARMINGTON DISTRICT
BY *GBB*