

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUBMIT IN TRIPPLICATE*
(Other instructions on
reverse side)

FORM APPROVED
OMB NO. 1004-0136
Expires: February 28, 1995

APPLICATION FOR PERMIT TO DRILL OR DEEPEN

1a. TYPE OF WORK

DRILL ☒ —

DEEPEN ☐

b. TYPE OF WELL

OIL WELL ☐

GAS WELL ☒

OTHER

SINGLE ZONE ☒

MULTIPLE ZONE ☐

2. NAME OF OPERATOR

Cross Timbers Operating Company

3. ADDRESS AND TELEPHONE NO.

2700 Farmington Ave., Bldg. K. Ste 1 Farmington, NM 87401

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements)

At surface
2,490' FNL & 1,820' FEL
At proposed prod. zone

14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE*

Approx 17 miles south of the Blanco, NM Post Office

15. DISTANCE FROM PROPOSED*
LOCATION TO NEAREST
PROPERTY OR LEASE LINE, FT.
(Also to nearest drlg. unit line, if any)

1,820'

18. DISTANCE FROM PROPOSED LOCATION*
TO NEAREST WELL, DRILLING, COMPLETED,
OR APPLIED FOR, ON THIS LEASE, FT.

685'

16. NO. OF ACRES IN LEASE

320 —

17. NO. OF ACRES ASSIGNED
TO THIS WELL

320

19. PROPOSED DEPTH

2,225' —

20. ROTARY OR CABLE TOOLS

Rotary Tools

21. ELEVATIONS (Show whether DF, RT, GR, etc.)

6,065' GL

22. APPROX. DATE WORK WILL START*

July 2001

23.

PROPOSED CASING AND CEMENTING PROGRAM

SIZE OF HOLE	GRADE SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	QUANTITY OF CEMENT
8-3/4"	7", J-55	20.0#	200'	75 sx Type III cmt, circ to surface
6-1/4"	4-1/2", J-55	10.5#	2,225'	220 sx Premium Lite cmt. Circ

preferential review pursuant to 43 CFR 3160.3
and appeal pursuant to 43 CFR 3165.4.

Cross Timbers plans to drill the above mentioned well as described in the enclosed Surface Use Program.

IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: If proposal is to deepen, give data on present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer program, if any.

24.

SIGNED

TITLE Drilling Engineer

DATE 3/28/01

(This space for Federal or State office use)

PERMIT NO. _____

APPROVAL DATE 7/6/01

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
CONDITIONS OF APPROVAL, IF ANY:

/s/ Lee Otteri

APPROVED BY

TITLE

DATE

*See Instructions On Reverse Side

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

DISTRICT I
P.O. Box 1980, Hobbs, N.M. 88241-1980

DISTRICT II
P.O. Drawer D0, Artesia, N.M. 88211-0719

DISTRICT III
1000 Rio Brazos Rd., Aztec, N.M. 87410

DISTRICT IV
PO Box 2088, Santa Fe, NM 87504-2088

State of New Mexico
Energy, Minerals & Natural Resources Department

OIL CONSERVATION DIVISION

P.O. Box 2088
Santa Fe, NM 87504-2088

Form C-102

Revised February 21, 1994

Instructions on back

Submit to Appropriate District Office

State Lease - 4 Copies

Fee Lease - 3 Copies

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number 30-045-30630	² Pool Code 71629	³ Pool Name BASIN FRUITLAND LOCAL
⁴ Property Code 7628096	⁵ Property Name BOLACK C	⁶ Well Number 17
⁷ GRID No. 167067	⁸ Operator Name CROSS TIMBERS OPERATING CO.	⁹ Elevation 6065'

¹⁰ Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
G	30	27-N	8-W		2490'	NORTH	1820'	EAST	SAN JUAN

¹¹ Bottom Hole Location If Different From Surface


UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
¹² Dedicated Acres 320 $\frac{E}{2}$			¹³ Joint or Infill		¹⁴ Consolidation Code		¹⁵ Order No.		

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

16	FD 3 1/2" BC B.L.M. 1955	N 87-19-42 W 2508.66' (M)	CALC'D CORNER FD WC N 01-53-00 E 26.4' (G.L.O.) 3 1/2" BC B.L.M. 1955	17	OPERATOR CERTIFICATION I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief	
LOT 15					Signature JEFFREY W. PATTON	
LOT 2					Printed Name JEFFREY W. PATTON	
					Title DRILLING ENGINEER	
					Date 11/21/00	
LOT 3					18	SURVEYOR CERTIFICATION I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief
LOT 4					Date of Survey	
					Signature and Seal of Professional Surveyor ROY A. CRUSH 8894	
					Certificate Number 8894	

BOLACK C #17

2490' FNL 1820' FEL

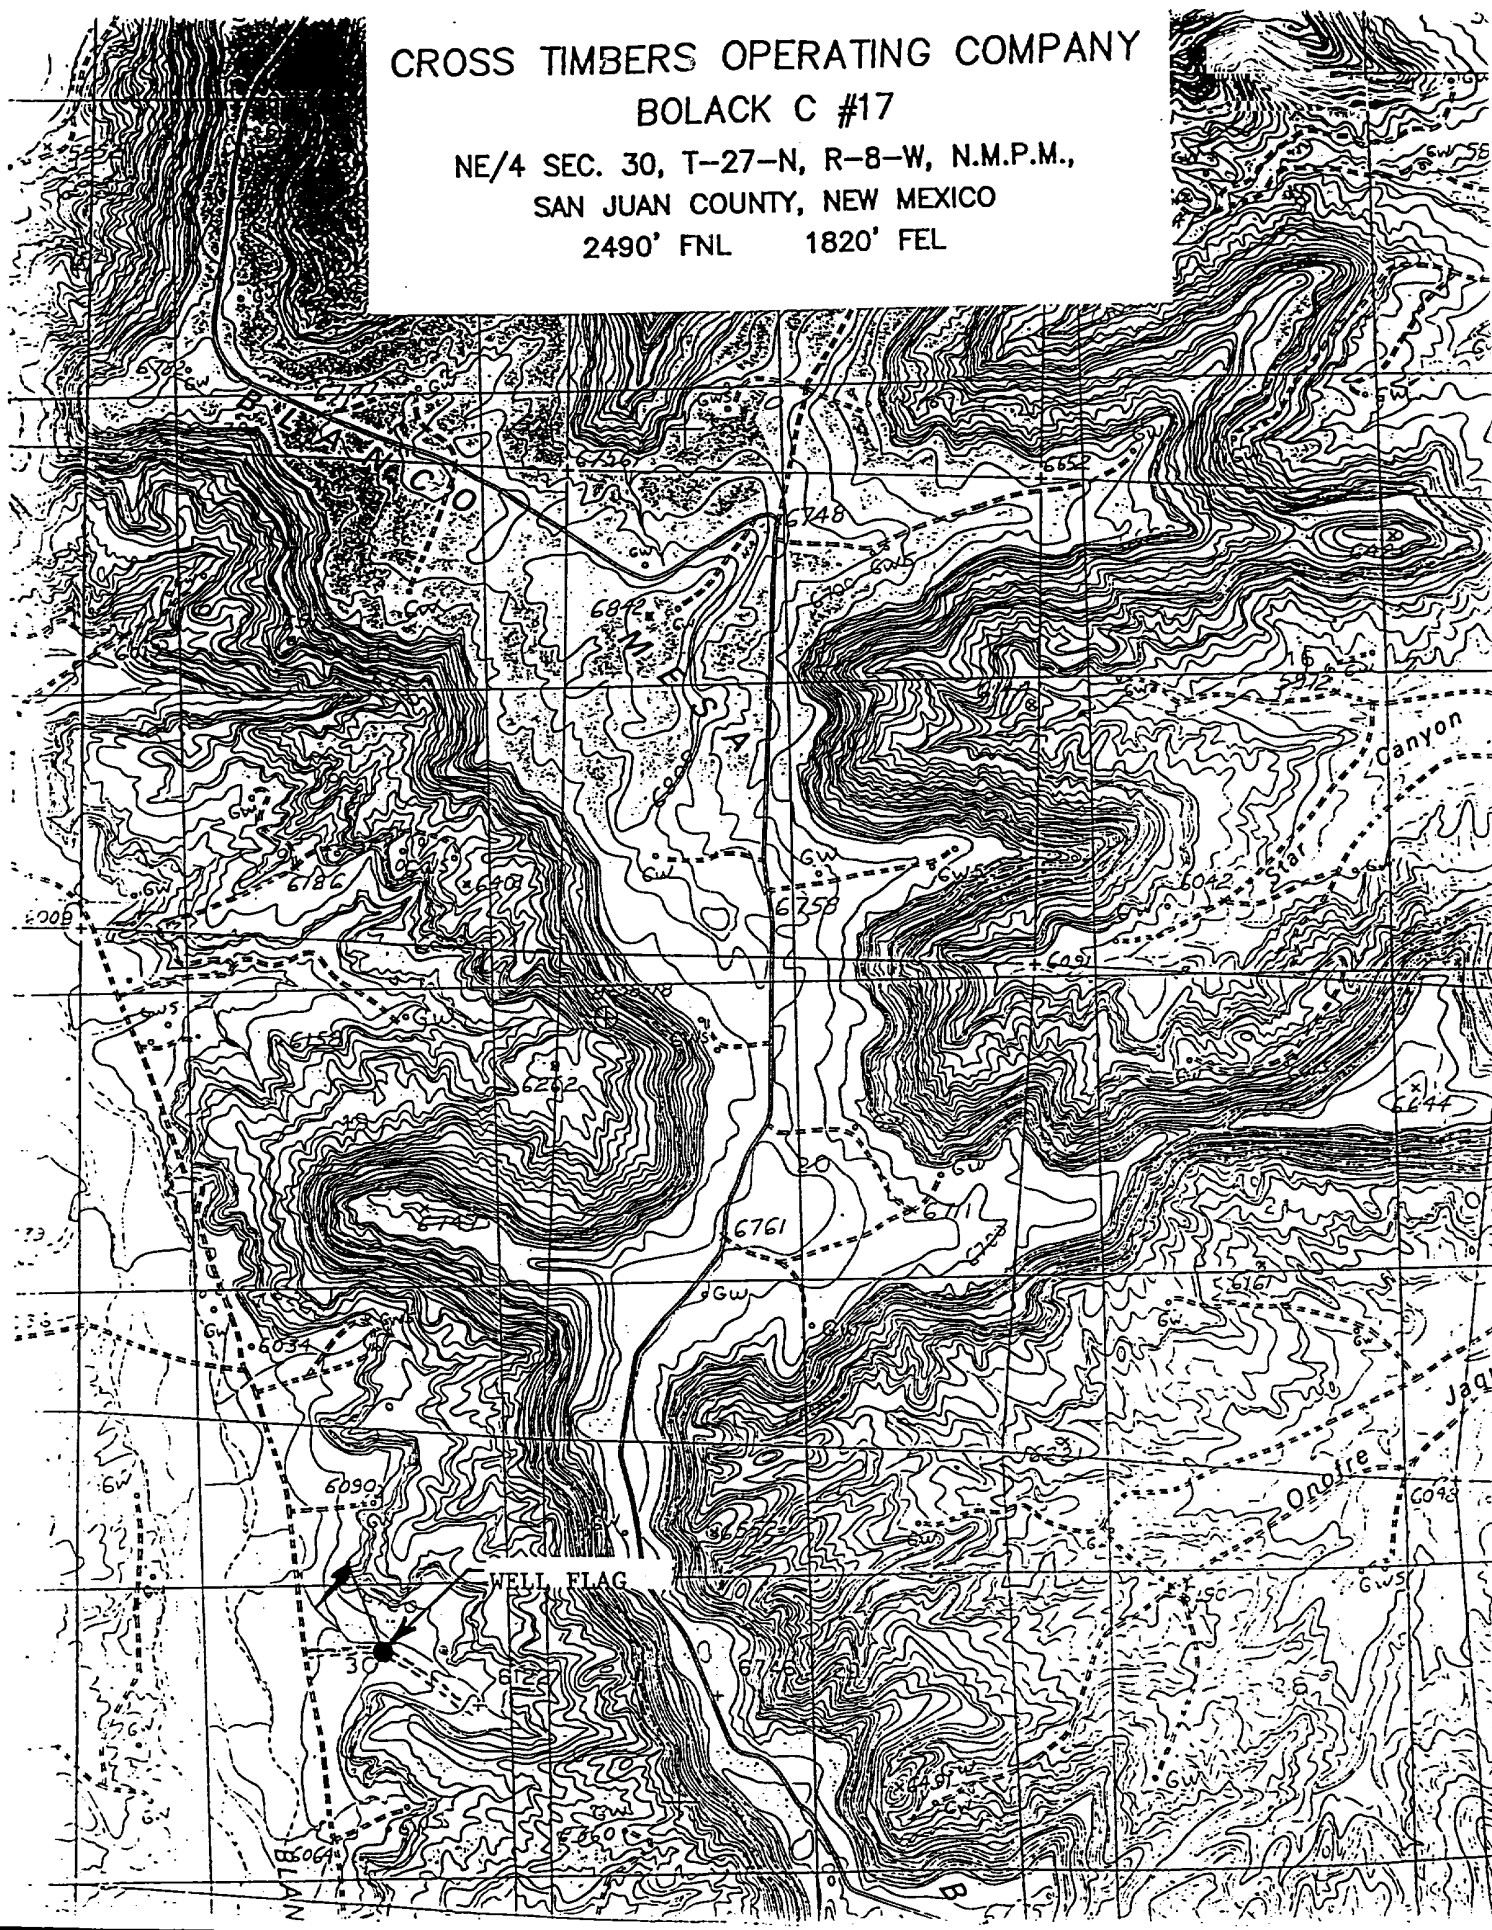

3. **WELLHEAD:**

Casinghead: Larkin Fig 92 (or equivalent) 2,000 psig WP (4,000 psig test) with 7", 8rd pin on bottom and 8-5/8" API Modified 8rd thread on top.

Tubinghead: Larkin Model 612 (or equivalent) 2,000 psig WP (4,000 psig test) with 4-1/2", 8rd bottom thread and 8-5/8" 8rd API Modified top body thread, 4.090" minimum bore.

4. **CEMENT PROGRAM:**

A. Surface: 7", 20#, J-55, STC casing at $\pm 200'$.

Lead: 75 sx Type III cement (or equivalent) containing 1/4 pps celloflake, 2% CaCl_2 (mixed at 14.6 ppg, 1.39 ft^3/sk , 6.67 gal wtr/sk).

Total slurry volume is 104.25 ft^3 , 250% excess of calculated annular volume required to circulate cement to surface.

B. Production: 4-1/2", 10.5#, J-55, STC casing at $\pm 2,225'$.

Lead: 220* sx of 35:65 Poz/Type III cement containing 10 PPS CSE, 2% CaCl_2 , 1/4 PPS Celloflake, 0.65% bwoc FL-62, 6% gel (mixed at 12.5 ppg, 2.07 ft^3/sk , 10.95 gal wtr/sk).

Total estimated slurry volume is 455 ft^3 , 100% excess of calculated annular volume required to circulate cement to surface.

* Actual cement volumes will be determined using log caliper volume plus 30% excess.

5. **DRILLING HAZARDS:**

- H_2S or other Poisonous Gases: No formations known to contain H_2S or any other poisonous gases will be penetrated with this wellbore.
- Abnormal Pressures: No overpressured zones are known to exist or are anticipated to be encountered during the drilling of this well.
- Lost Circulation: Seepage and/or lost circulation may be encountered below surface casing and can be controlled with conventional lost circulation materials added to the mud system.

6. **LOGGING PROGRAM:**

Array Induction/DFL/GR/SP/Cal
DSN/Spectral Density/GR/Cal/Pe

TD to bottom of surf csg.
TD to 1600' & 1000' to 700'

No mud logger to be used on this well.
