AZTEC ON & GAS COMPANY

P.O. DRAWER 570
FARMINGTON, NEW MEXICO 87401

July 14, 1977

United States Geological Survey P. O. Box 959
Farmington, New Mexico 87401

Attention: Mr. P. T. McGrath

Enclosed please find map showing existing roads and planned access roads to Aztec Oil & Gas Company's Browning Stewart #5 well. The locations of tank batteries and flow lines will be on location with well. A burn pit will be provided for disposal of trash. Cuttings, drilling fluid and produced fluids will be put into the reserve pit and properly disposed of depending on amount and type of fluids.

There will be no camps or air strips.

Also enclosed is location layout showing approximate location of rig, pits and pipe racks.

Water supply will be San Juan River

The location will be restored according to Bureau of Land Management standards. This work will begin when all related construction is finished.


Mr. Bernie Mahony will be Aztec Oil and Gas Company's field representative supervision these operations.

Yours truly,

AZTEC OIL & GAS COMPANY

L. O. Van Ryan District Production Manager

LOVR/dg

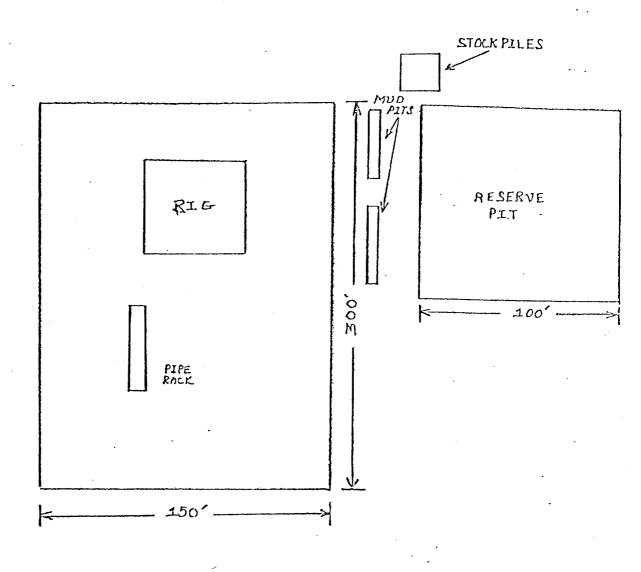

TRAILER HOUSE

PARKING AREA

CUT REQUIRED FOR Above LOCATION: 3'

AZTEC DIL & GAS COMPANY

P.O. DRAWER 570

FARMINGTON, NEW MEXICO 87401

July 14, 1977

United States Geological Survey P. O. Box 959 Farmington, New Mexico

Attention: Mr. P. T. McGrath

Re: Blowout Preventer Plan

Dear Sir:

All drilling and completion rigs will be equipped with 6" double hydraulic blowout preventers and a hydraulic closing unit with steel lines.

The preventer is 3000# working pressure and 6000# test.


All crews will be thoroughly trained in the operation of this preventer. The preventer will be tested at the beginning of every tower change to insure proper operation.

Yours truly,

L. O. Van Ryan

District Production Manager

LOVR/dg

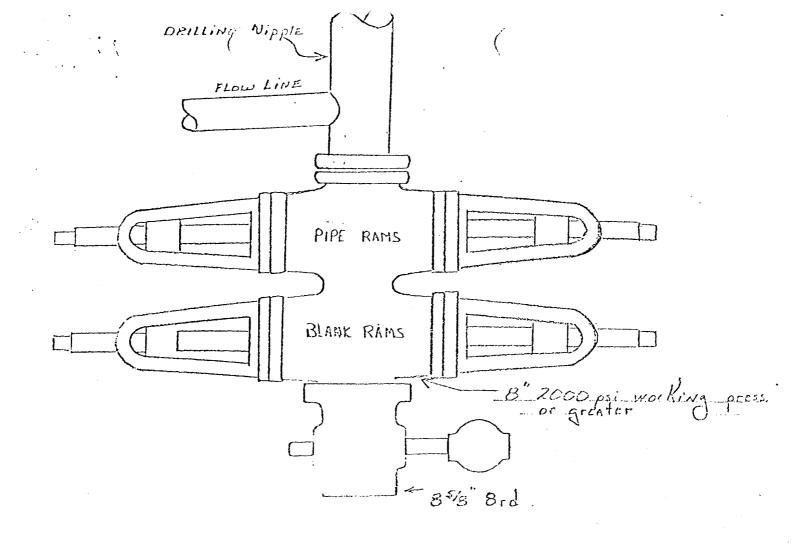

Preventers and spools are to have through bore of 8" - 2000# or larger.

