

STATE OF NEW MEXICO  
ENERGY AND MINERALS DEPARTMENT  
OIL CONSERVATION DIVISION

CASE NO. 8548  
Order No. R-7929-A

APPLICATION OF HICKS OIL AND GAS,  
INC. FOR SALT WATER DISPOSAL,  
SAN JUAN COUNTY, NEW MEXICO.

RECEIVED  
JUL 30 1985  
OIL CON. DIV.  
DIST. 3

NUNC PRO TUNC ORDER

BY THE DIVISION:

It appearing to the Division that Order No. R-7929, dated July 2, 1985, does not correctly state the intended order of the Division,

IT IS THEREFORE ORDERED THAT:

(1) Finding Paragraph No. (3) on page 1 of Division Order No. R-7929 is hereby corrected to read in its entirety as follows:

"(3) The applicant, Hicks Oil and Gas, Inc., is the owner and operator of the Southeast Cha Cha Unit Well No. 20, located 1980 feet from the South and East lines, (Unit J), of Section 17, Township 28 North, Range 13 West, NMPM, San Juan County, New Mexico."

(2) Ordering Paragraph No. (1) on pages 2 and 3 of said order is hereby corrected to read in its entirety as follows:

"(1) The applicant, Hicks Oil and Gas, Inc., is hereby authorized to utilize its Southeast Cha Cha Unit Well No. 20 located 1980 feet from the South and East lines, (Unit J), of Section 17, Township 28 North, Range 13 West, NMPM, San Juan County, New Mexico, to dispose of produced salt water into the Cha Cha Gallup Oil Pool, injection to be accomplished through 2 3/8-inch tubing installed in a packer set at approximately 5550 feet, with injection into the perforated interval from approximately 5623 feet to 5627 feet;

PROVIDED HOWEVER THAT, said tubing shall be internally plastic lined; the casing-tubing annulus shall be filled with an inert fluid; a pressure gauge shall be attached to the annulus or the annulus shall be equipped with an approved leak detection device in order to determine leakage in the casing, tubing, and/or packer.

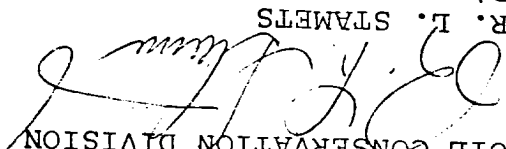
Case No. 8548

Order No. R-7929-A

PROVIDED FURTHER THAT, prior to commencing injection operations, the casing in the subject well shall be pressure-tested to assure the integrity of such casing in a manner that is satisfactory to the supervisor of the Division's district office at Aztec."

(3) The corrections set forth in this order be entered nunc pro tunc as of July 2, 1985.

DONE at Santa Fe, New Mexico, on this 26th day of July, 1985.

STATE OF NEW MEXICO  
OIL CONSERVATION DIVISION  
  
R. L. STAMETS  
Director

S E A L

Ed/

STATE OF NEW MEXICO  
ENERGY AND MINERALS DEPARTMENT  
OIL CONSERVATION DIVISION

RECEIVED

JUL 05 1985

OIL CON. DIV.  
DIST. 3

IN THE MATTER OF THE HEARING  
CALLED BY THE OIL CONSERVATION  
DIVISION FOR THE PURPOSE OF  
CONSIDERING:

CASE NO. 8548  
Order No. R-7929

APPLICATION OF HICKS OIL AND GAS, INC.  
FOR SALT WATER DISPOSAL, SAN JUAN  
COUNTY, NEW MEXICO.

ORDER OF THE DIVISION

BY THE DIVISION:

This cause came on for hearing at 8 a.m. on  
March 27, 1985, and on June 19, 1985, at Santa Fe, New Mexico,  
before Examiner Michael E. Stogner.

NOW, on this 2nd day of July 1985, the Division  
Director, having considered the testimony, the record,  
and the recommendations of the Examiner, and being fully  
advised in the premises,

FINDS THAT:

- (1) Due public notice having been given as required by  
law, the Division has jurisdiction of this cause and the  
subject matter thereof.
- (2) At the time of the Hearing, Division Case Nos. 8525,  
8546, 8547, and 8548 were consolidated for purposes of  
testimony.
- (3) The applicant, Hicks Oil and Gas Inc. is the owner  
and operator of the Southeast Cha Cha Unit Well No. 20, located  
1980 feet from the North and West lines, (Unit F), of Section  
17, Township 28 North, Range 13 West, NMPM, San Juan County,  
New Mexico.
- (4) The applicant proposes to utilize said well to  
dispose of produced salt water into the Cha Cha Gallup Oil

Pool, with injection into the perforated interval from approximately 5623 feet to 5627 feet.

(5) The injection should be accomplished through 2 3/8-inch plastic lined tubing installed in a packer set at approximately 5550 feet; the casing-tubing annulus should be filled with an inert fluid; and a pressure gauge or approved leak detection device should be attached to the annulus in order to determine leakage in the casing, tubing, or packer.

(6) Prior to commencing injection operations, the casing in the subject well should be pressure-tested throughout the interval from the surface down to the proposed packer setting depth, to assure the integrity of such casing.

(7) The injection well or system should be equipped with a pressure limiting switch or other acceptable device which will limit the wellhead pressure on the injection well to no more than 1124 psi.

(8) The Director of the Division should be authorized to administratively approve an increase in the injection pressure upon a proper showing by the operator that such higher pressure will not result in migration of the injected waters from the Cha Cha Gallup Oil Pool.

(9) The operator should notify the supervisor of the Aztec district office of the Division of the date and time of the installation of disposal equipment and of the mechanical integrity pressure test in order that the same may be witnessed.

(10) The operator should take all steps necessary to ensure that the injected water enters only the proposed injection interval and is not permitted to escape to other formations or onto the surface.

(11) Approval of the subject application will prevent the drilling of unnecessary wells and otherwise prevent waste and protect correlative rights.

IT IS THEREFORE ORDERED THAT:

(1) The applicant, Hicks Oil and Gas, Inc., is hereby authorized to utilize its Southeast Cha Cha Unit Well No. 20 located 1980 feet from the North and West lines, (Unit F), of Section 17, Township 28 North, Range 13 West, NMPM, San Juan County, New Mexico, to dispose of produced salt water into the Cha Cha Gallup Oil Pool, injection to be accomplished through 2

3/8-inch tubing installed in a packer set at approximately 5550 feet, with injection into the perforated interval from approximately 5623 feet to 5627 feet;

PROVIDED HOWEVER THAT, said tubing shall be internally plastic lined; the casing-tubing annulus shall be filled with an inert fluid; a pressure gauge shall be attached to the annulus or the annulus shall be equipped with an approved leak detection device in order to determine leakage in the casing, tubing, and/or packer.

PROVIDED FURTHER THAT, prior to commencing injection operations, the casing in the subject well shall be pressure-tested to assure the integrity of such casing in a manner that is satisfactory to the supervisor of the Division's district office at Aztec.

(2) The injection well or system shall be equipped with a pressure limiting switch or other acceptable device which will limit the wellhead pressure on the injection well to no more than 1124 psi.

(3) The Director of the Division upon proper application may authorize an increase in injection pressure upon a proper showing by the operator of said well that such higher pressure will not result in migration of the injected fluid from the Cha Cha Gallup Oil Pool.

(4) The operator shall notify the supervisor of the Aztec district office of the Division of the date and time of the installation of disposal equipment and of the mechanical integrity pressure test in order that the same may be witnessed.

(5) The operator shall immediately notify the supervisor of the Division's Aztec district office of the failure of the tubing, casing, or packer, in said well or the leakage of water from or around said well and shall take such steps as may be timely and necessary to correct such failure or leakage.

(6) The applicant shall conduct disposal operations and submit monthly reports in accordance with Rules 702, 703, 704, 705, 706, 708 and 1120 of the Division Rules and Regulations.

(7) Jurisdiction of this cause is retained for the entry of such further orders as the Division may deem necessary.

-4-  
Case No. 8548  
Order No. R-7929

DONE at Santa Fe, New Mexico, on the day and year hereinabove designated.

STATE OF NEW MEXICO  
OIL CONSERVATION DIVISION

A handwritten signature in dark ink, appearing to read "R. L. Stamets", is written over the printed name.

R. L. STAMETS,  
Director

S E A L