

(SUBMIT IN TRIPLICATE)

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

Land Office San Juan, N.M.Lease No. 070252Unit 20-4# 14-00-00-137

**E. L. Johnston**  
District Engineer

## SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL	<input checked="" type="checkbox"/>	SUBSEQUENT REPORT OF WATER SHUT-OFF	<input type="checkbox"/>
NOTICE OF INTENTION TO CHANGE PLANS	<input type="checkbox"/>	SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING	<input type="checkbox"/>
NOTICE OF INTENTION TO TEST WATER SHUT-OFF	<input type="checkbox"/>	SUBSEQUENT REPORT OF ALTERING CASING	<input type="checkbox"/>
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL	<input type="checkbox"/>	SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR	<input type="checkbox"/>
NOTICE OF INTENTION TO SHOOT OR ACIDIZE	<input type="checkbox"/>	SUBSEQUENT REPORT OF ABANDONMENT	<input type="checkbox"/>
NOTICE OF INTENTION TO PULL OR ALTER CASING	<input type="checkbox"/>	SUPPLEMENTARY WELL HISTORY	<input type="checkbox"/>
NOTICE OF INTENTION TO ABANDON WELL	<input type="checkbox"/>		<input type="checkbox"/>

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

August 2, 1955

Well No. 11-19 is located 1750 ft. from N line and 1500 ft. from W line of sec. 19

NE 1/4, SW 1/4, Sec. 20 (Sec. and Sec. No.) 20 N (Twp.) 14 E (Range) T. 14 N. R. 14 E. (Meridian)  
Blanco (Field) De la Torre (County or Subdivision) New Mexico (State or Territory)

The elevation of the Graded Ground above sea level is 6600 ft.

## DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudlogging jobs, cementing points, and all other important proposed work)

We propose to drill a 15" hole approx. 200' and set 175' of 10-3/4" OD. casing, cemented w/150 cu ft gal and set 7-5/8" OD. casing at approx. 1550' cemented with 150 cu ft gal w/30 cu ft cement on bottom, and then set 5-1/2" OD. casing at approx. 9811' with 100 cu ft gal. Gas zones will be approx. 5425-5525, 5525-5606 and 5611-5779. Point located to be fractured down casing w/20,000 gals w/wg of 1-1/4" to 1-1/2" w/gal. Manatee and Cliff House to be fractured approximately down casing through perforations using 10,000 gals w/wg of 1-1/4" to 1-1/2" w/gal.


Install 2-3/8" OD. tubing, and complete the well.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company PACIFIC MONTAGUT PIPELINE CORPORATIONAddress 413-1/2 West Main StreetFarmington, New Mexico

By

*J. A. Hagan*  
District Engineer

Title District Engineer

Page 1

UNITED STATES OF AMERICA

DEPARTMENT OF JUSTICE  
FEDERAL BUREAU OF INVESTIGATION  
WASHINGTON, D. C. 20535

RE: [REDACTED] - [REDACTED]

[REDACTED]

[REDACTED]

[REDACTED]

[REDACTED]

[REDACTED]

[REDACTED]

COMPANY Pacific Northwest Pipeline Corporation


Well Name & No. \_\_\_\_\_ Lease No. \_\_\_\_\_

Location 1750' from the South line and 1550' from the West line.

Being in NE  $\frac{1}{4}$  SW  $\frac{1}{4}$

Sec. 19, T29 N., R 5 W., N.M.P.M., Rio Arriba County, New Mexico.

Ground Elevation 6690, ungraded ground.

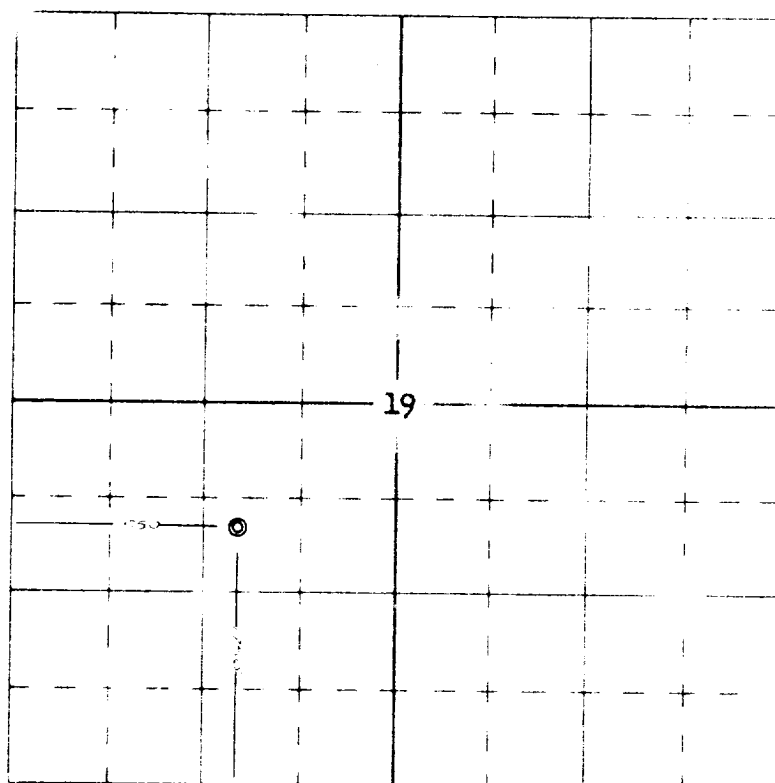

Scale -- 4 inches equals 1 mile



Surveyed July 8 \_\_\_\_\_, 1955

This is to certify that the above plat was prepared from field notes of actual surveys made by me or under my supervision and that the same are true and correct to the best of my knowledge and belief.

Ernest V. Echohawk

Ernest V. Echohawk  
Registered Land Surveyor  
N. M. Reg. #1545

