

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil well ☐ gas well ☐ Pre-Shot Ground  
other Motion Measurement

2. NAME OF OPERATOR  
U.S. Dept. of Energy

3. ADDRESS OF OPERATOR  
U.S. DOE, P.O. Box 14100, Las Vegas, NV 89114

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)  
1500' S 37° E of GB-ER, Sec. 36,  
AT SURFACE: T-29-N, R-4-W  
AT TOP PROD. INTERVAL:  
AT TOTAL DEPTH: Same as above (Vertical Hole)

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:      SUBSEQUENT REPORT OF:

TEST WATER SHUT-OFF ☐ ☐

FRACTURE TREAT ☐ ☐

SHOOT OR ACIDIZE ☐ ☐

REPAIR WELL ☐ ☐

PULL OR ALTER CASING ☐ ☐

MULTIPLE COMPLETE ☐ ☐

CHANGE ZONES ☐ ☐

ABANDON\* ☒ ☐

(other) ☐ ☐

5. LEASE SE 67764  
Carson National Forest

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

9. WELL NO.  
GB-D

10. FIELD OR WILDCAT NAME  
Choza Mesa Pictured Cliffs

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA  
Sec. 36, T-29-N, R-4-W

12. COUNTY OR PARISH 13. STATE  
Rio Arriba New Mexico

14. API NO.

15. ELEVATIONS (SHOW DF, KDB, AND WD)  
GL 7203'

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

1. Blow cables apart with plastic explosive at  $\pm$  600'.
2. Pull cables out of hole.
3. Go in hole with 2-3/8" tubing. Spot a cement plug from 600' to 350'.  
Tag top of plug with tubing.
4. Spot a surface cement plug from 15' to the bottom of the cellar.
5. Install a 4" O.D. pipe for well marker extending from 6' below ground level to 4' above ground level, with top orange peeled and welded closed.  
Well name will be inscribed using a welded bead.
6. Cut 20" and 13-3/8" casing strings at the bottom of the cellar. Remove CMP and backfill the cellar with dirt.

NOTE: Above operations are expected to be accomplished between 9-26-78 and 10-2-78.


Subsurface Safety Valve: Manu. and Type \_\_\_\_\_ Set @ \_\_\_\_\_ Ft.

18. I hereby certify that the foregoing is true and correct.

SIGNED [Signature] TITLE Dir. AREA 3 DATE June 12, 1978

(This space for Federal or State office use)

APPROVED BY \_\_\_\_\_ TITLE \_\_\_\_\_  
CONDITIONS OF APPROVAL, IF ANY:

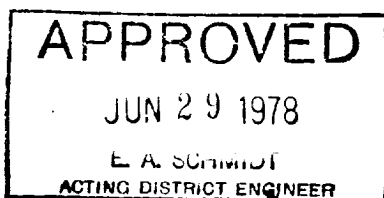

\*See Instructions on Reverse Side

RECEIVED

JUN 19 1978

U. S. GEOLOGICAL SURVEY  
DURANGO, COLO.

WELL NO. GB-D  
PRESENT CONDITIONS

DEPTH (FT)  
0 = GROUND LEVEL

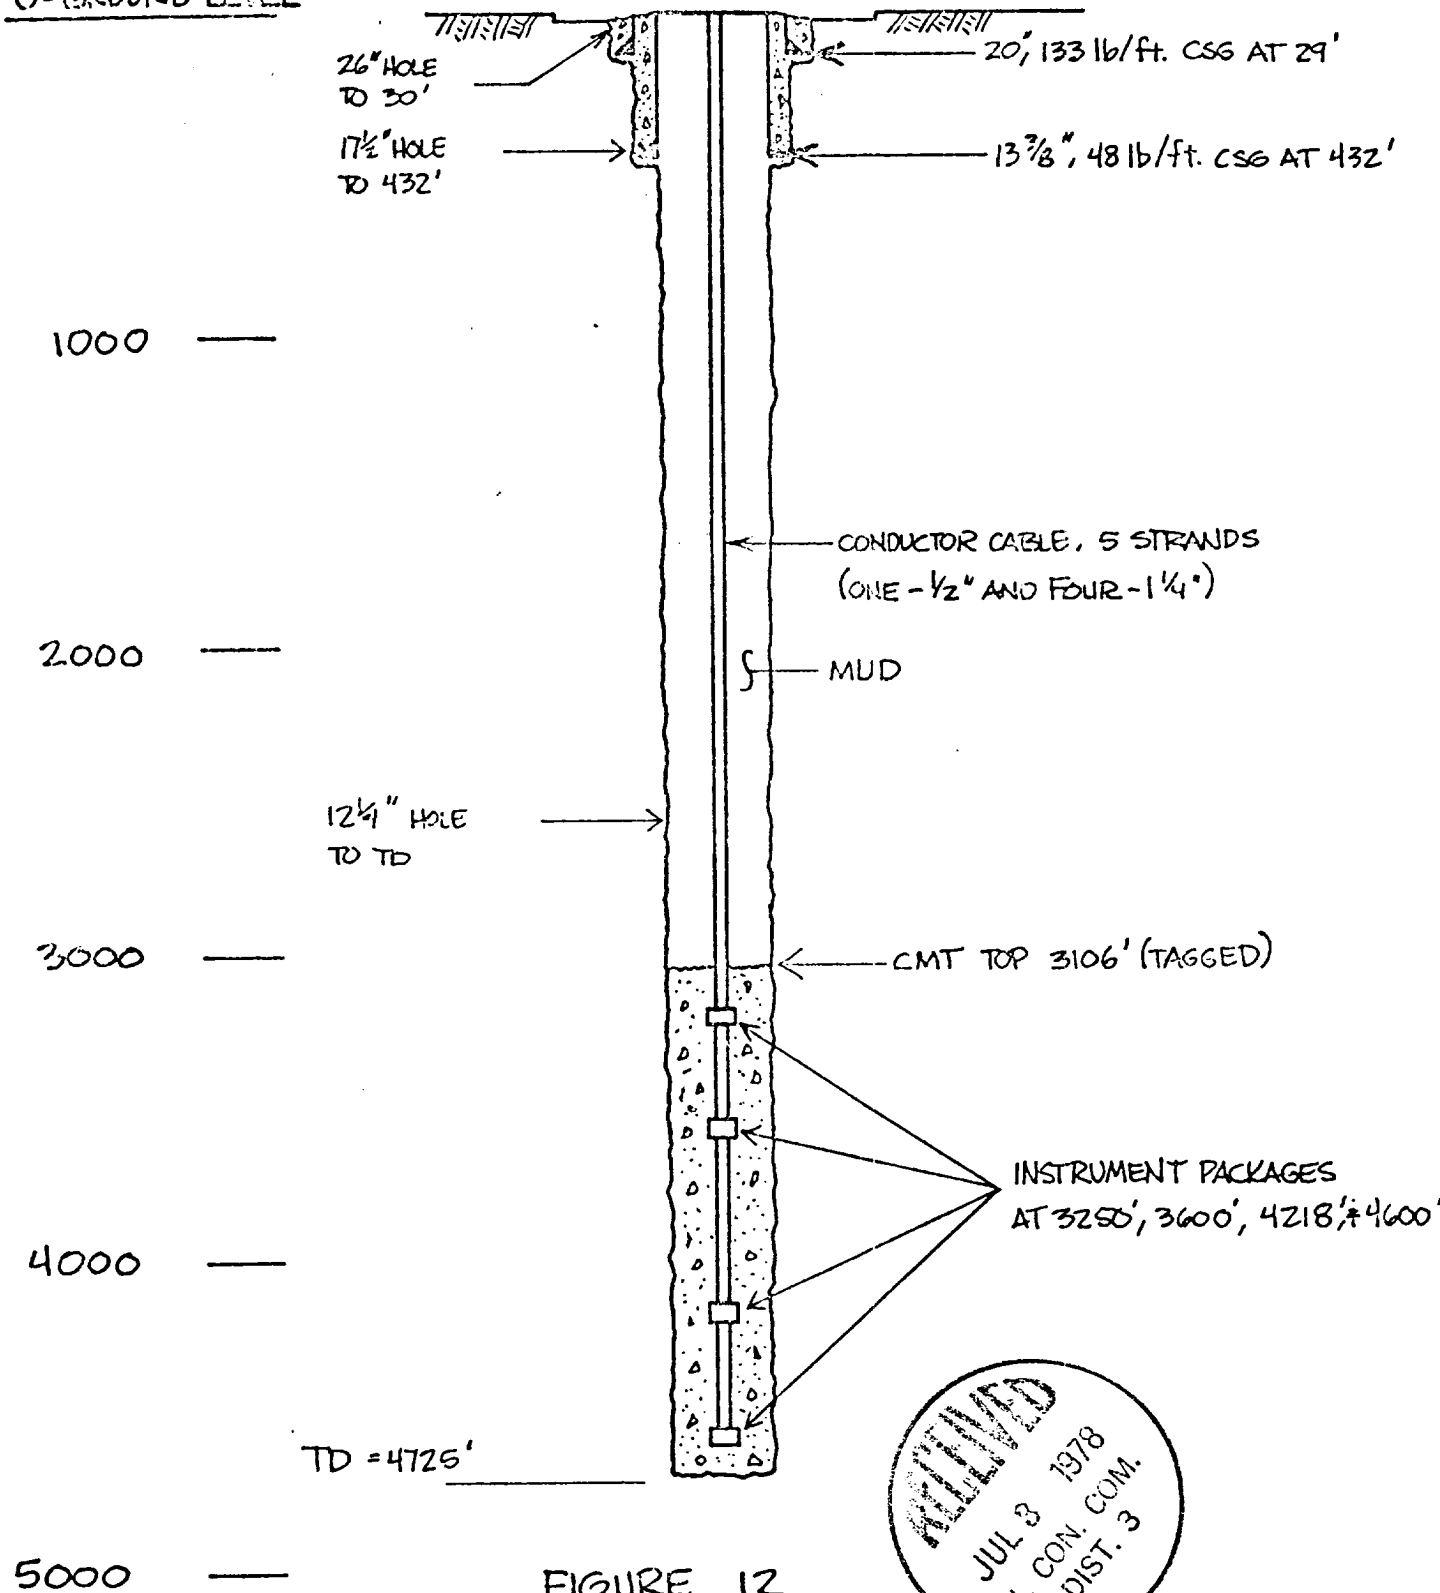


FIGURE 12



# WELL NO. GB-D PROPOSED ABANDONMENT

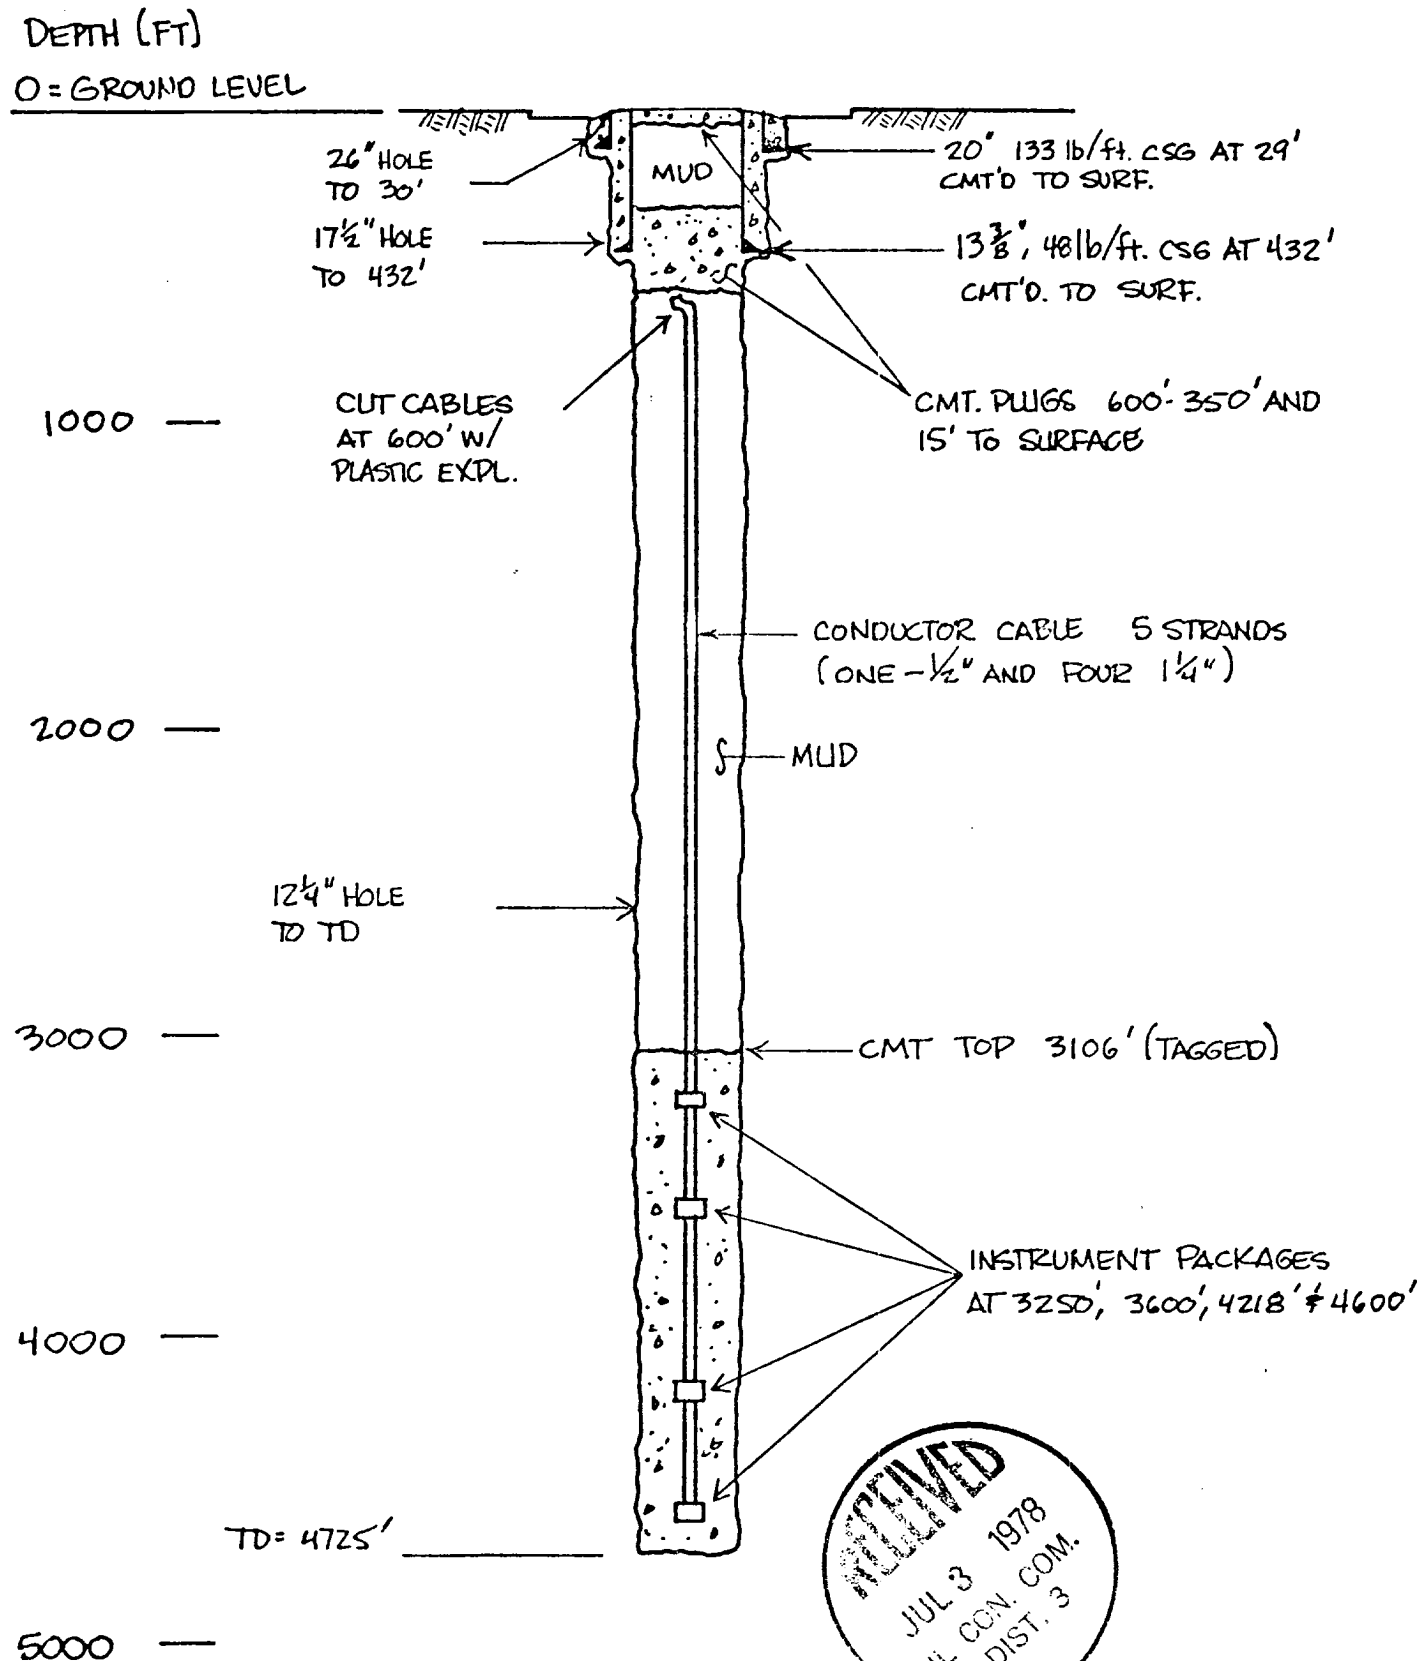


FIGURE 13