

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB NO. 1004-0136
Expires: November 30, 2000

APPLICATION FOR PERMIT TO DRILL OR RE-ENTER

1a. Type of Work <input checked="" type="checkbox"/> DRILL		5. Lease Serial No. NMSF078902 281	
1b. Type of Well <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone		6. If Indian, Allottee or Tribe Name	
2. Name of Operator Phillips Petroleum Company 17654		7. Unit or CA Agreement Name and No. NMNM78415A	
3a. Address 5525 Highway 64, NBU 3004, Farmington, NM 87401		8. Lease Name and Well No. San Juan 29-5 Unit #74A	
3b. Phone No. (include area code) 505-599-3454		9. API Well No. 30-039-26909	
4. Location of Well (Report location clearly and in accordance with any State requirements)* At surface E. J(SWNW) 2020' FNL & 862' FWL; Lat-36.7275, Long-107.3861 At proposed prod. zone same as above		10. Field and Pool, or Exploratory Blanco Mesaverde	
14. Distance in miles and direction from nearest town or post office* 26 miles east of Blanco, New Mexico		11. Sec., T., R., M., or Blk. and Survey or Area E Section 17, T29N, R5W	
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drg. unit line, if any) 862'	16. No. of Acres in lease 2200.0 acres	17. Spacing Unit dedicated to this well 320 W/2	
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft.	19. Proposed Depth 6009'	20. BLM/BIA Bond No. on file ES0048	
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 6562' GL	22. Approximate date work will start* 12/27/02	23. Estimated duration 20 days	

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

- | | |
|---|--|
| 1. Well plat certified by a registered surveyor. | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). |
| 2. A Drilling Plan | 5. Operator certification. |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office). | 6. Such other site specific information and/or plans as may be required by the authorized officer. |

25. Signature <i>Patsy Clugston</i>	Name (Printed/Typed) Patsy Clugston	Date 1/22/02
-------------------------------------	--	-----------------

Title Sr. Regulatory/Proration Clerk		
---	--	--

Approved by (Signature) <i>OK by JL 2-26-02</i>	Name (Printed/Typed)	Date 2/19/02
--	----------------------	-----------------

Title	Office
-------	--------

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*(Instructions on Reverse)

This action is subject to technical and procedural review pursuant to 43 CFR 3165.3 and appeal pursuant to 43 CFR 3165.4.

DRILLING OPERATIONS AUTHORIZED ARE
SUBJECT TO COMPLIANCE WITH ATTACHED
"GENERAL REQUIREMENTS"

District I
Box 1980, Hobbs, NM 88241-1980
District II
111 South First, Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
2040 South Pacheco, Santa Fe, NM 87505

State of New Mexico
Energy, Minerals & Natural Resources Department

OIL CONSERVATION DIVISION
2040 South Pacheco
Santa Fe, NM 87505

Form C-1
Revised October 18, 19

Instructions on back
Submit to Appropriate District Office
State Lease - 4 Copies
Fee Lease - 3 Copies

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

* AIT Number 30-039-26904		* Pool Code 72319	* Pool Name Blanco Mesaverde
* Property Code 009256	* Property Name SAN JUAN 29-5 UNIT		* Well Number 74A
* OGRID No. 017654	* Operator Name PHILLIPS PETROLEUM COMPANY		* Elevation 6562'

10 Surface Location


UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
E	17	29N	5W		2020'	NORTH	862'	WEST	RIO ARRI

11 Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
E									

* Dedicated Acres 320 W/2	* Joint or Infill Y	* Consolidation Code U	* Order No.
-------------------------------------	-------------------------------	----------------------------------	-------------

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR
NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

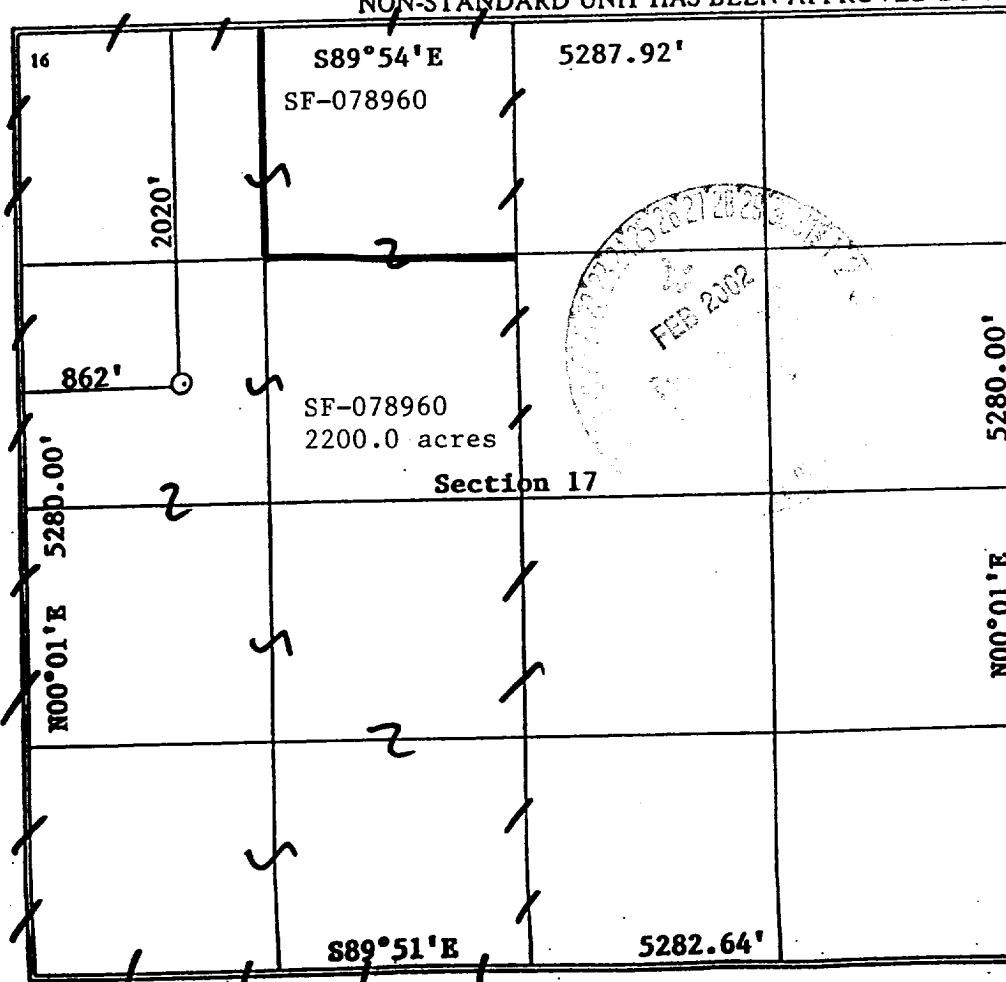

17 OPERATOR CERTIFICATION
I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief.


Signature
Patsy Clegston
Printed Name
Patsy Clegston
Title
Sr. Regulatory/Proration Clerk
Date
10-25-01

18 SURVEYOR CERTIFICATION

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.

Date of Survey
08/14/01
Signature
Harry P. Broadhurst
Printed Name
HARRY P. BROADHURST
Professional Surveyor
11393
Certificate Number

NW/4 SEC. 17, T-29-N, R-05-W, N.M.P.M.,
RIO ARriba COUNTY, NEW MEXICO
GROUND LEVEL ELEVATION: 6562'

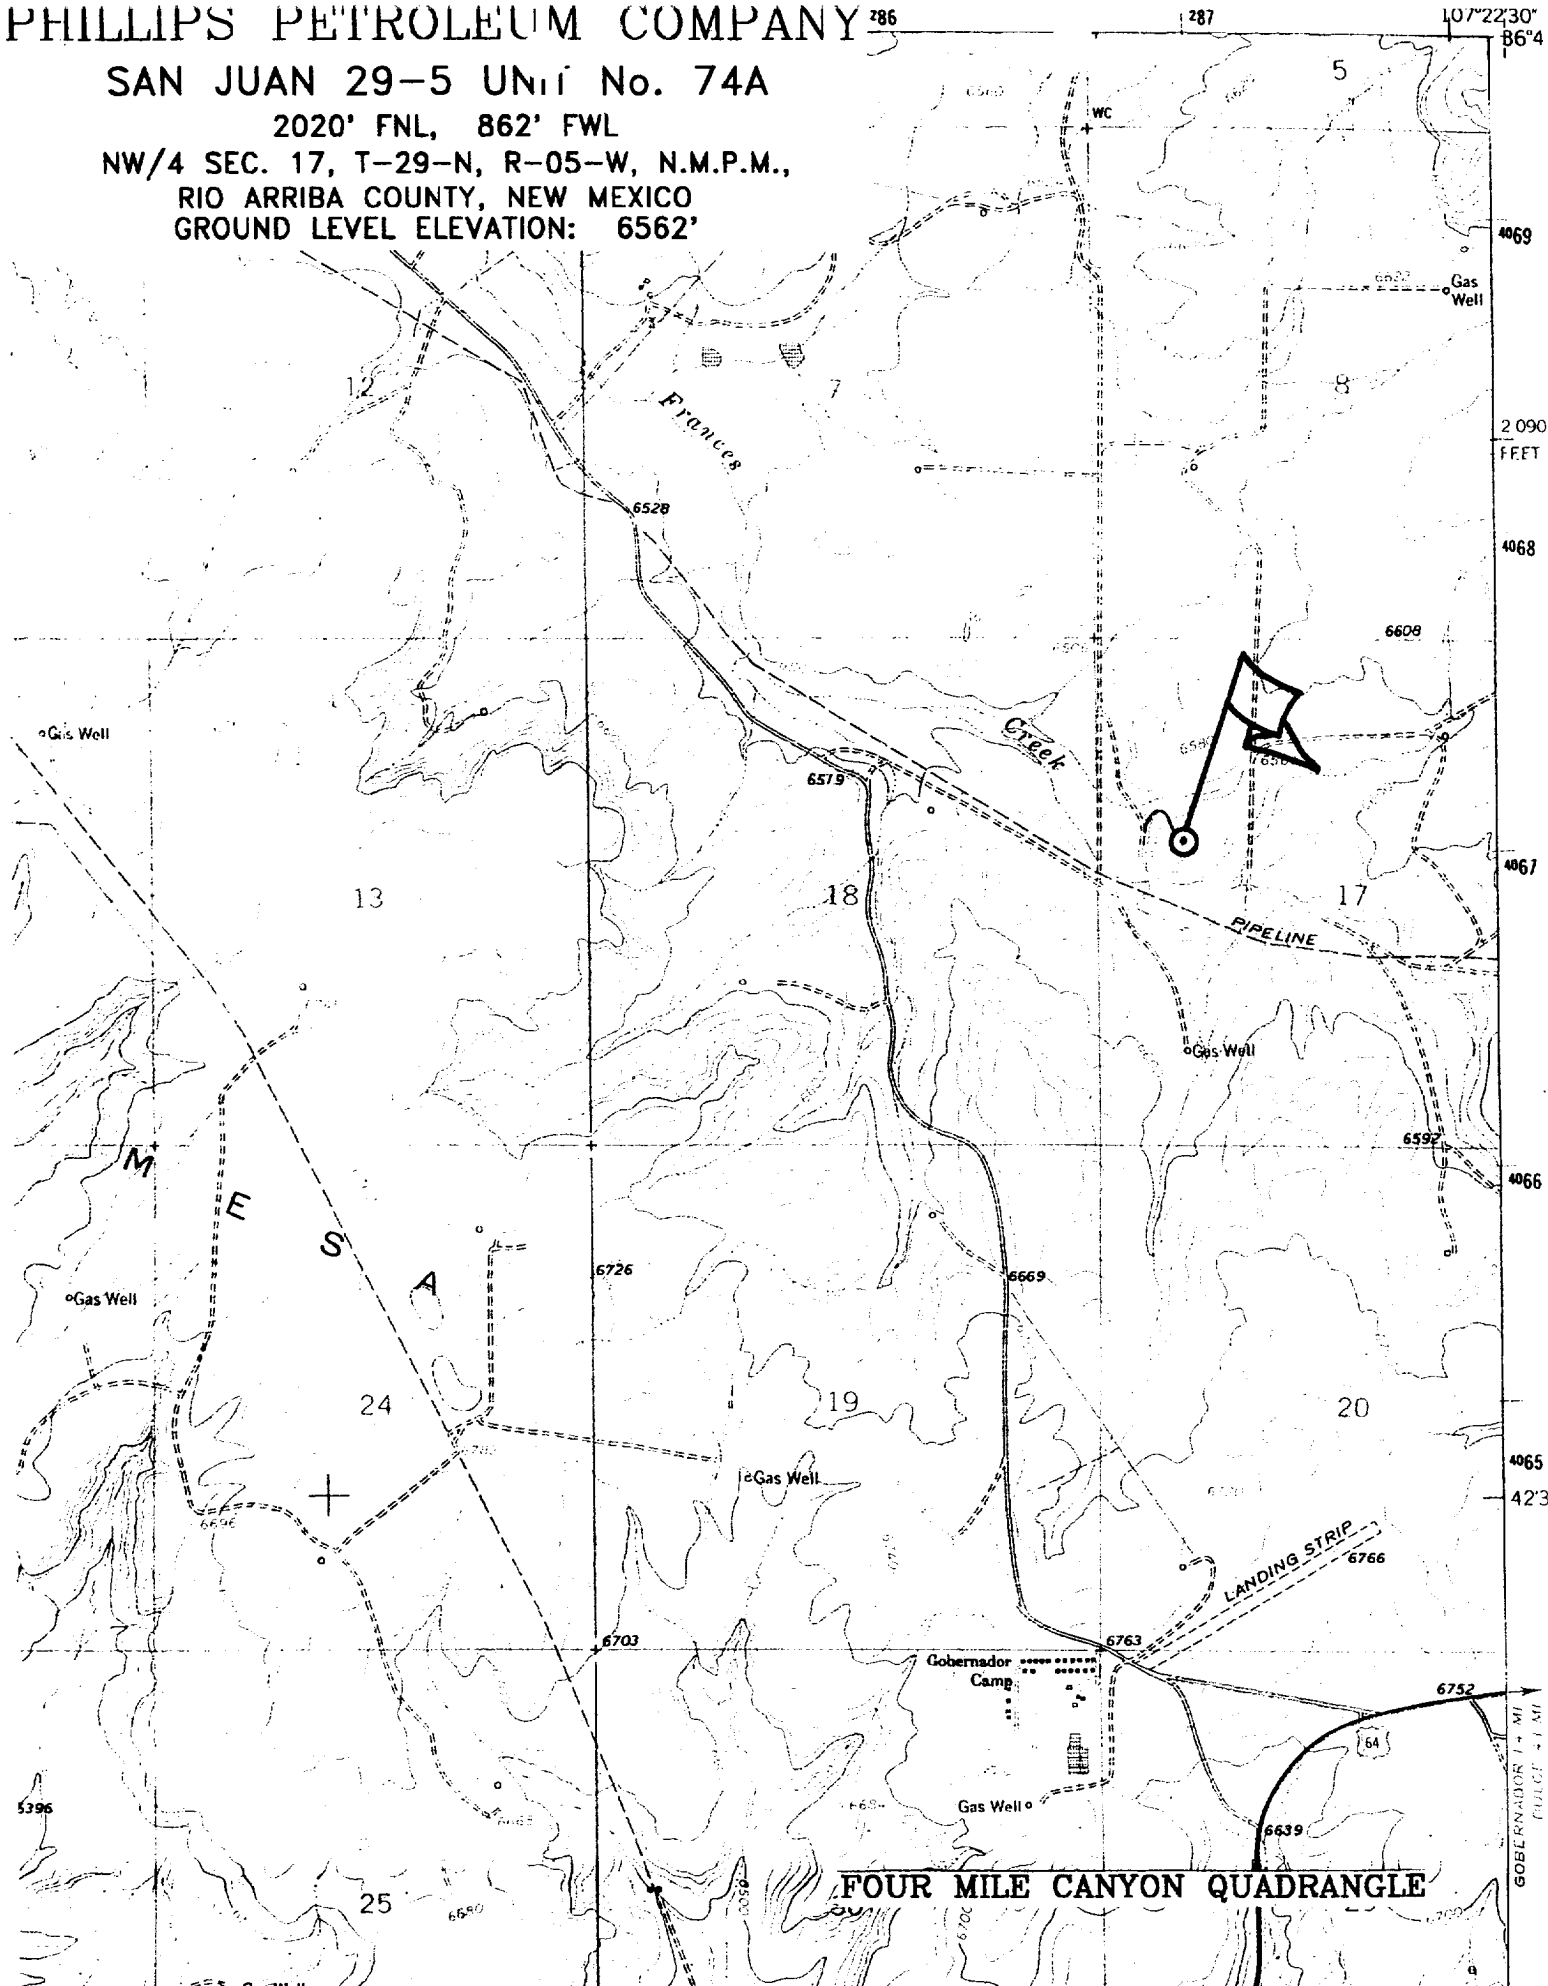

PHILLIPS PETROLEUM COMPANY

WELL NAME: San Juan 29-5 Unit #74A (MV)

DRILLING PROGNOSIS

1. Location of Proposed Well: Unit E, 2020' FNL & 862' FWL
Section 17, T29N, R5W
2. Unprepared Ground Elevation: @ 6562' (unprepared)
3. The geological name of the surface formation is San Jose.
4. Type of drilling tools will be rotary.
5. Proposed drilling depth is 6009'.
6. The estimated tops of important geologic markers are as follows:

<u>Nacimiento - 1442'</u>	<u>Lewis Shale - 4280'</u>
<u>Ojo Alamo - 2684'</u>	<u>Cliff House Ss - 5334'</u>
<u>Kirtland Sh - 2842'</u>	<u>Menefee Fm. - 5395'</u>
<u>Fruitland Fm. - 3196'</u>	<u>Pt. Lookout - 5695'</u>
<u>Pictured Cliffs - 3530'</u>	<u>Mancos Sh - 5809'</u>

7. The estimated depths at which anticipated water, oil, gas or other mineral bearing formations are expected to be encountered are as follows:

Water:	<u>Ojo Alamo - 2684' - 2842'</u>
Gas & Water:	<u>Fruitland - 3196' - 3530'</u>
Gas:	<u>Pictured Cliffs - 3530' - 4280'</u>
	<u>Mesaverde - 5334' - 5809'</u>

8. The proposed casing program is as follows:

Surface String: 9-5/8", 32.3# H-40 @ 320' *

Intermediate String: 7", 20#, J/K-55 @ 3800' (J-55 will be used, unless the K-55 is the only casing available.)

Production String: 4-1/2", 11.6#, J-55 @ 6009' (TD)

* The surface casing will be set at a minimum of 320', but could be set deeper if required to maintain hole stability.

9. Cement Program:

Surface String: 197.6 sx Type III cement + 2% bwoc Calcium Chloride + 0.25#/sx Cello-flake + 60.6% FW (1.41 yield = 278 cf).

Circulate

9. Cement Program (cont.)

Intermediate String: **Lead Cement:** 478.5 sx Type III cement (35:65) POZ + 5#/sx Gilsonite + 0.25 #/sx Cello-Flake + 6% bwoc Bentonite + 10#/sx CSE + 3% bwow KCL + 0.4% bwoc FL-25 + 0.02#/sx static free + 129% FW (2.37 yield = 1134 cf). Cement to surface with 120% excess casing/hole annular volume.

Tail Cement: 50.0 sx Type III cement + 0.25#/sx Cello-Flake + 1% Calcium Chloride + 60.5% FW (1.4 yield = 70 cf). Cement to surface with 120% excess of casing/hole annulus volume.

Production String *: **Lead Cement:** 50 sx Type III (35:65) POZ L (Fly Ash L) with 6% gel Bentonite, 5#/sx Phenoseal, 0.2% bwoc CD-32, 0.75 bwoc FL-52 1#/sx LCM-1 0.25#/sx Cello-Flake, 10#/sx CSE, 0.02#/sx Static Free (2.34 yield = 117 cf).

2nd Lead Cement: 101.7 sx Type III (35:65) POZ L (Fly Ash L) with 6% gel Bentonite, 2.5#/sx Phenoseal, 0.2% bwoc CD-32, 0.75 bwoc FL-52 1#/sx LCM-1 0.25#/sx Cello-Flake, 10#/sx CSE, 0.02#/sx Static Free (2.32 yield = 236 cf)

Tail Cement - 20 sx Type III (35:65) POZ L (Fly Ash L) with 6% gel Bentonite, 5#/sx Phenoseal, 0.2% bwoc CD-32, 0.75 bwoc FL-52 1#/sx LCM-1 0.25#/sx Cello-Flake, 10#/sx CSE, 0.02#/sx Static Free (1.91 yield = 38 cf).

*The production casing cement is calculated to cover the openhole interval with 50% excess and annular volume 200' within intermediate shoe. Depending on hole conditions, the well may be cemented in a single stage or two staged.

Centralizer Program:

Surface: Total four (4) 1 @ 10' above shoe & top of 2nd, 4th & 6th joint

Intermediate: Total seven (7) – 10' above shoe, top of 1st, 2nd, 4th, 6th, & 8th jts & 1 jt. above surface casing.

Production: None planned.

Turbulators: Total Three (3) – on intermediate casing at 1st jt. below the Ojo Alamo and next 2 jts up.

BOP AND RELATED EQUIPMENT CHECK LIST

3M SYSTEM:

2 hydr. rams (pipe & blind) or hydr. ram and annular with blind ram on bottom

Kill Line (2-inch minimum)

1 kill line valve (2-inch minimum)

1 choke line valve

2 chokes (refer to diagram in attachment 1) on choke manifold

Upper kelly cock valve in open position with handle available

Safety valve (in open position) and subs to fit all drill strings in use (with handle available)

Pressure gauged on choke manifold

2 inch minimum choke line

Fill-up line above the uppermost preventer

The BOPs will be pressure tested according to Onshore Order #2 III, A 1 and 30% safety factor.