

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUBMIT IN TRIPLICATE*
(Other instructions on reverse side)

Form approved
Budget Bureau No. 42-R1424.
5. LEASE DESIGNATION AND SERIAL NO.

ST 078046

6. IF INDIAN, ALLOTTEE, OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

Hughes

9. WELL NO.

1 (GANG)

10. FIELD AND POOL, OR WILDCAT

Elmco Mesa Verde

11. SEC., T., R., M., OR BLM. AND SURVEY OR AREA

Sec. 19, T-29-N, R-8-W
N 36 P.M.

12. COUNTY OR PARISH

San Juan

13. STATE

New Mexico

1. OIL WELL ☐ GAS WELL ☒ OTHER

2. NAME OF OPERATOR

El Paso Natural Gas Company

3. ADDRESS OF OPERATOR

Box 990, Farmington, New Mexico

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.* See also space 17 below.)
At surface

990'S, 990'W

14. PERMIT NO.

15. ELEVATIONS (Show whether DF, RT, GR, etc.)

6464' GL

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF

FRACTURE TREAT

SHOOT OR ACIDIZE

REPAIR WELL

(Other)

PULL OR ALTER CASING

MULTIPLE COMPLETE

ABANDON*

CHANGE PLANS

SUBSEQUENT REPORT OF:

WATER SHUT-OFF

FRACTURE TREATMENT

SHOOTING OR ACIDIZING

(Other)

Squeeze

REPAIRING WELL

ALTERING CASING


ABANDONMENT*

X

(NOTE: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

7-3-66 Set cement retainer at 5050', cemented open hole w/300 sacks regular cement, 2% gel, 1/4 cu. ft. fine Gilsomite/sk. followed by 100 sks. regular cement, 1% sand, 2% calcium chloride, cement on vacuum. Re-cemented w/150 sks. regular cement, 1% sand, 2% calcium chloride. Final pressure 3500#. Dumped 9 bbls. slurry on plug. Ran fullbore packer and set at 2145', held 1000# above, pumped in below, set packer at 4625', held 1000# above, pumped in below. Spotted 100 sks. regular cement over interval 4625-4822'. Max. pr. 950#, standing pressure 450#. This hole will be side-tracked to avoid drilling junk in open hole.

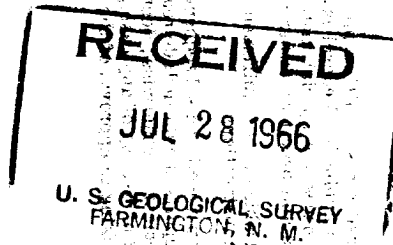

18. I hereby certify that the foregoing is true and correct

SIGNED Original Signed F. H. WOOD

TITLE Petroleum Engineer

DATE 7-22-66

(This space for Federal or State office use)

APPROVED BY

TITLE

DATE

CONDITIONS OF APPROVAL, IF ANY:

*See Instructions on Reverse Side

Instructions


General: This form is designed for submitting proposals to perform certain well operations, and reports of such operations when completed, as indicated, on Federal and Indian lands pursuant to applicable Federal law and regulations, and if approved or accepted by any State, on all lands in such State, pursuant to applicable State law and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local, area, or regional procedures and practices, shall be shown below of well be issued by, or may be obtained from, the local Federal and/or State office.

Item 4: If there are no applicable State requirements, locations on Federal or Indian land should be described in accordance with Federal requirements. Consult local State or Federal office for specific instructions.

Item 17: Proposals to abandon a well and subsequent reports of abandonment should include such special information as is required by local Federal and/or State offices. In addition, such proposals and reports should include reasons for the abandonment; data on any former or present productive zones, or other zones with present significant fluid contents not sealed off by cement or otherwise; depths (top and bottom) and method of placement of cement plugs; mud or other material placed below, between and above plugs; amount, size, method of parting of any casing, liner or tubing pulled and the depth to top of any left in the hole; method of closing top of well; and date well site conditioned for final inspection looking to approval of the abandonment.

U.S. GOVERNMENT PRINTING OFFICE: 1961-O-604229

607-1951

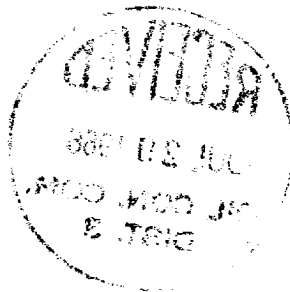

U.S. GOVERNMENT PRINTING OFFICE: 1961-O-604229