OIL CON. COM

DIST.

(Other instructions on reverse side) DEPARTMENT OF THE INTERIOR

UNITED STATES

3	0	-	Ex	4	5		ليز	35	/
5.	I.EAS		DESI	GNA	TION	ANI	SE	LIAL NO	<u>. </u>

	GEOLOG	GICAL SURVEY			USA-SF-0784	14	
APPLICATION	Y FOR PERMIT T	6. IF INDIAN, ALLOTTE	E OR TRIBE NAME				
1a. TYPE OF WORK	ILL 🛭	DEEPEN	PLUG BA		7. UNIT AGREEMENT N	AME	
b. TYPE OF WELL OIL C. WELL W	AS OTHER		NGLE X MULT	IPLE	8. FARM OR LEASE NA	M E	
2. NAME OF OPERATOR					Day		
TENNECO OIL	COMPANY				9. WELL NO.		
3. ADDRESS OF OPERATOR					4		
720 S. Color	cado Blvd., Denv	er. Colorado 8	10222		10. FIELD AND POOL, OR WILDCAP		
	eport location clearly and				Basin Dakota		
)' FNL, 1450' FW	L			11. SEC., T., R., M., OR AND SURVEY OR AL		
At proposed prod. zon	e e				Sec. 8, T29N	, R8W	
14. DISTANCE IN MILES	AND DIRECTION FROM NEAR	EST TOWN OR POST OFFICE	F.		12. COUNTY OR PARISH	13. STATE	
See Point lE	3, Surface Use P	lan			San Juan	New Mexico	
15. DISTANCE FROM PROPOSED. LOCATION TO NEAREST PROPERTY OR LEASE LINE, FT. (Also to nearest drig, unit line, if any)							
18. DISTANCE FROM PROF TO NEAREST WELL, D OR APPLIED FOR, ON TH	RILLING, COMPLETED,	19. FR	7610	i i	Rotary		
21. ELEVATIONS (Show wh	ether DF, RT, GR, etc.)	6410 G.L.			November 1		
23	P	ROPOSED CASING ANI	CEMENTING PROG	RAM			
SIZE OF HOLE	S1ZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH		QUANTITY OF CEME	NT	
13 3/4"	9 5/8"	36#	250+	See	4 below	· · ·	
8 3/4"	7"	23#	3500	Şee	4 below		
6 1/4"	4 1/2"	11.6#, 10.5#	7610	See	4 below		
	1	See 4 below		I	•		
. The geologi	ical name of the	surface format	ion is Tertia	ry San J	ose.		
283. ESTIMATED F	ORMATION TOPS						
Pictured Cli	Lffs 3	036	Lev	vis Shal	e. 3140		
		_					

Cliffhouse 4635 Menefee 5254 5381 Point Lookout Mancos 6496 7237 Gallup Greenhorn 7336 TOTAL DEPTH 7610 Dakota A

- Drill 13 3/4" hole to 250+. Run 9 5/8", 36#, K-55 ST&C casing to 250+. Circulate cement to surface. Drill an 8 3/4" hole to 3500 and run 7", 23# K-55, ST&C casing to 3500. Cement with sufficient volume to circulate cement to surface. Drill a 6 1/4" hole using gas as a circulating fluid to total depth. Run 4 1/2" (3650' of 10.5#, K-55 ST&C casing plus 610' of 11.6#, K-55 ST&C casing) with casing liner to 761.0. Cement with sufficient volume using Neat cement to circulate cement to liner top.
- BLOWOUT PREVENTORS: Hydraulic, double ram, 10". One set of rams will be provided for each size drill pipe in the hole. One set of blind rams at all times. Fill line will be 2". Kill line will be 2", choke relief line will be 2" with variable choke. BOP's will be installed, tested and in working order before drilling below surface casing and shall be maintained ready for use until drilling operations are completed. BOP's, drills and test will be recorded in the IADC Drilling Report. They shall be checked every 24 hours. All rig equipment will be tested to above BOE ratings.

0-250 Native solids. Sufficient viscosity to clean hole and run casings 250-3500 Low solids. Gel chemical

3500-7610 Gas

7. AUXILIARY EQUIPMENT

a. Kelly cock will be in use at all times.

Stabbing valve to fit drill pipe will be present on floor at all times. b.

Mud monitoring will be visual, no abnormal pressures are anticipated in

d. Floats at bits.

e. Drill string safety valve(s) to fit all pipe in the drill string will be maintained on the rig floor while drilling operations are in progress.


f. Rotating head will be used while drilling with gas.

- 8. No cores or DST's are anticipated. 10' samples will be taken from 3000-3500. GR/Induction from TD to intermediate casing. GR/FOC/Caliper from TD to base of Mesa Verde.
- No abnormal pressures or temperatures are anticipated. See point #5 for blowout prevention
- 10. The drilling of this well will take approximately 10 days. The gas is not yet contracted.

in above space descense Proposed Prockam: it proposal is to deepen or plug back, give data on present productive zone and proposed new productive sone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer program, if any.					
24. SIGNED An Promise	Division Production Manager 4-3-79				
(This space for Federal or State office use)	* · · :				
PERMIT NO. Of Sruh	APPROVAL DATE				

NEW MEXICO OIL CONSERVATION COMMISSION WELL LOCATION AND ACREAGE DEDICATION PLAT

		All distances	must be from the o	uter boundaries of	the Section.		
Operator			Lease				Well No.
TENNECO OIL COMPANY			DAY				
Unit Letter F	1 _ 1		Ro	nge 8W	County San Juan		
Actual Footage Loc	L	L 2714		CVV	san	Juan	
1590	feet from the	North	line and	.50 _{fee}	et from the	West	line
Ground Level Elev.	Producing For	mation	Pool				Dedicated Acreage:
6410	Dakota		Ba	sin Dakota			311.91 Acres
 If more the interest and If more that 	nd royalty). In one lease of d	dedicated to	the well, outling	ne each and ide	entify the o	ownership t	he plat below. hereof (both as to working f all owners been consoli-
dated by c Yes If answer is this form if No allowab	ommunitization, use No If and is "no," list the finecessary.)	nitization, for nswer is "yes; owners and tra- ed to the well	ce-pooling. etc? '' type of consonant descriptions until all interes	lidations which have a	ctually bed	en consolid	ated. (Use reverse side of munitization, unitization, approved by the Commis-
<u> </u>						1	
1450'	CONOCO Se	ec.				Name Name Position Enviro Company	certify that the information con- certify that the information con- crein is true and complete to the cy knowledge and belief. C. A. Jusk Commental Coordinat CO Oil Company 11, 1979
	USAISF 0784		8			shown on notes of under my is true of knowledg	SIND
- minimi	innimi mari	minning.				Certificate	No.14, -A T 2:
0 330 660	90 1320 1650 198	0 2310 2640	2000 150	0 1000 5	100 0	3950	RED D VSS

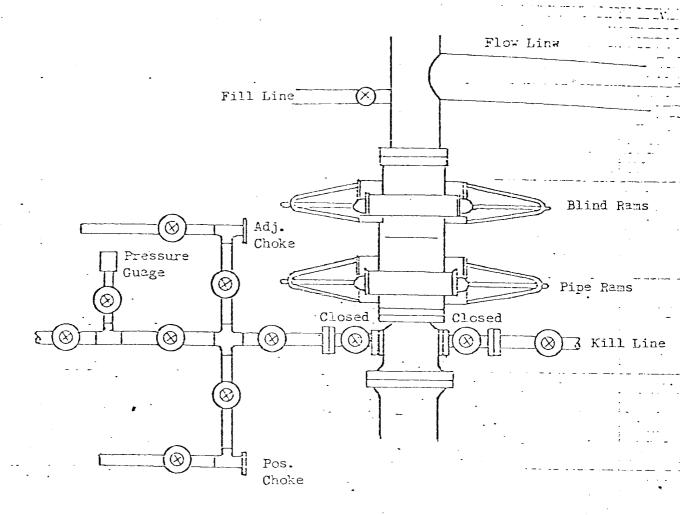

All valves 2"

All BOPs, flanges, spools, valves, & lines must be series 900 or 3000 psi working press.

Choke manifold must be at ground level and extended out from under substructure.

TENTIECO OIL COMPANY

REQUIRED MINIMUM BLOWOUT PREVENTOR

ROOKUP

Denver, Colorado

1. Existing Roads

- A. Proposed Well Site Location: The proposed well site location was surveyed and staked by a registered land surveyor and is located 1590'FNL and 1450'FWL, Sec. 8, T29N, R8W, San Juan County, New Mexico. (See Exhibit I, Surveyor's Plat.)
- B. Planned Access Route: The planned access route begins in Blanco, New Mexico and goes east for approximately 8 miles at the junction of a dirt road which turns NE. Turn on this dirt road for approximately 1/2 mile at which point it forks. Take the left fork and continue on (See page 1-A attached hereto and made a part hereof.)
- C. Access Road Labelled: '

Color Code: Red - Improved Surface Blue - New Access Road

- D. Not applicable the proposed well is a development well.
- E. The proposed well is a development well. See Exhibit II for existing roads within a one mile radius.
- F. Existing Road Maintenance or Improvement Plan: The existing roads will require minimal maintenance.

2. Planned Access Roads

(All roads are existing roads.)

- A. Width:
 The average width of the road is twenty feet.
- B. Maximum Grades: Maximum grades will be 6%.
- C. Turnouts: There are no turnouts planned as sight distance is sufficient.
- D. Drainage Design: The road is center crowned to allow drainage. The road is flat primarily.
- E. Culverts Use Major Cuts and Fills:

 No culverts, major cuts or fills will be needed in constructing this road.
- F. Surfacing Material:
 Native soil has been wetted, bladed and compacted to make the road surface, which is existing.

DAY 4

Page 1-A

- 1. Existing Roads
 - B. Planned Access Route:

around for approximately 1.5 miles to the junction of a dirt road to the south. Turn on this and go an additional $\frac{1}{3}$ mile into the proposed well site location. (See Exhibit II.)

2. Planned Access Roads (Cont'd)

- G. Gates, Cattleguards, Fence Cuts: No gates, cattleguards or fences will be needed.
- Η. New Roads Centerlined Flagged: Existing Roads.

3. Location of Existing Wells

The proposed well is a development well. Exhibit III shows existing wells within a one mile radius.

Α.	Water Wells:	None
В.	Abandoned Wells:	None
C.	Temporarily Abandoned Wells:	None
D.	Disposal Wells:	None .
E.	Drilling Wells:	Exhibit III
F.	Producing Wells: See Exhibit	III
G.	Shut-In Wells:	None
Н.	Injection Wells:	None
I.	Monitoring or Observation Wells:	None.

4. Location of Existing and/or Proposed Facilities

Α. Existing facilities within one mile owned or controlled by Lessee/Operator:

Tank batteries -	N/A
Production facilities -	Exhibit III
	N/A
	N/A
	N/A
	N/A
	Tank batteries - Production facilities - Oil Gathering Lines - Gas Gathering Lines - Injection Lines - Disposal Lines -

- В.
- New facilities in the event of production:
 (1) New facilities will be within the dimensions of the drill pad.
 - (2) The dimensions are shown on Exhibit IV.
 - (3) Construction Materials/Methods: Construction materials will be native to the site. Facilities will consist of a well pad.
 - (4) Protection of Wildlife/Livestock: New facilities will be fenced to protect wildlife or livestock.

4. Location of Existing and/or Proposed Facilities (Cont'd)

- B. New facilities in the event of production: (cont'd)
 - (5) New facilities will consist of wellhead, tank and production unit.
- C. Rehabilitation of Disturbed Areas:
 Following the completion of construction, those areas required for continued production will be graded to provide drainage and minimize erosion. Those areas unnecessary for use will be graded to blend with surrounding topography per BLM recommendations.

5. Location and Type of Water Supply

- A. Location and type of water supply:
 Water will be hauled from a private source.
- B. Water Transportation System: Water trucks will be used.
- C. Water wells: N/A:

6. Source of Construction Materials

- A. Materials:
 Construction materials will consist of soil native to the site. Any topsoil, if present, will be stripped and stockpiled as needed.
- B. Land Ownership; The planned site and access road is on federal land administered by the Bureau of Land Management.
- C. Materials Foreign to the Site: N/A.
- D. Access Roads: No additional roads will be required.

7. Methods for Handling Waste Disposal

- A. Cuttings:
 Cuttings will be contained in the reserve pit.
- B. Drilling Fluids: Drilling fluids will be retained in the reserve pit.
- C. Produced Fluids:
 Produced fluids, including produced water will be collected in the reserve pit. Any small amount of hydrocarbon that may be produced during testing will be retained in the reserve pit. Prior to clean up operations, the hydrocarbon material will be skimmed.

7. Methods for Handling Waste Disposal (Cont'd)

- D. Sewage: Sanitary facilities for sewage disposal will consist of at least one pit toilet, during the driller operations. The pit will be backfilled immediately following completion of the drilling operation.
- E. Garbage:
 There probably will not be much putriscible garbage to dispose of. However, it will be disposed of along with the refuse in a constructed burn pit, which will be fenced. The small amount of refuse will be burned and the pit will be covered with a minimum 36 inch cover upon completion.
- F. Clean-Up of Well Site:

 Upon the release of the drilling rig, the surface of the drilling pad will be prepared to accommodate a completion rig, if testing indicates potential productive zones. In either case, the "mouse hole" and "rat hole" will be covered to eliminate a potential hazard to livestock. The reserve pit will be fenced to prevent entry of livestock until the pit is backfilled. Reasonable clean up will be performed prior to final restoration of the site.

. .

8. Ancillary Facilities

None required.

- 9. Well Site Layout
 - A. Exhibit IV.
 - B. Location of pits, etc. See Exhibit $_{\text{IV}}$.
 - C. Rig orientation etc. See Exhibit $_{\text{IV}}$.
 - D. Lining of pits: Pits will not be lined. They will be covered with a fine mesh netting, if necessary, for the protection of wildlife if fluids are found to be toxic.

10. Plans for Restoration of Surface

A. Reserve pit clean up:
The pit will be fenced prior to rig release and shall be maintained until clean up. Prior to backfilling any hydrocarbon material on the pit surface will be removed. The fluids and solids contained in the pit shall be backfilled with soil excavated from the site and with soil adjacent to the reserve pit. The restored surface of the reserve pit will be contoured as needed to minimize erosion. The reserve pit area will be seeded per BLM recommendations during the appropriate season following final restoration of the site.

10. Plans for Restoration of Surface (Cont'd)

- B. Restoration Plans Production Developed:
 The reserve pit will be backfilled and restored as described under Item A. In addition, those disturbed areas not required for production will be graded to blend with the surrounding topography, and seeded, per BLM recommendations. The portion of the drill pad required for production and turning areas will be graded to minimize erosion and provide access to production facilities under inclement conditions. Following depletion and abandonment of the site, restoration procedures will be those under Item C. below.
- C. Restoration Plan No Production Developed:
 The reserve pit will be restored as described above. With no production developed, the entire surface disturbed by construction of the drilling pad will be restored. The site will be contoured to blend with the surrounding topography. The site will be seeded according to BLM recommendations. If the new access road is not required for other development plans, it will be obliterated and restored and seeded per BLM recommendations.
- D. Rehabilitation Time Table:
 Upon completion of operations the intial clean up of the well site will be performed. Final restoration of the site will be performed as soon as possible according to procedural guidelines published by the USGS and BLM. Seeding of the disturbed areas which are no longer required will be performed during the appropriate season, following final restoration.

11. Other Information

- A. Surface Description: The surface description of the area is flat, with numerous amounts of sagebrush scattered throughout.

 Approximately a 12 foot cut will be required in the NW side of the location.
- B. Surface Use Activities:
 The surface is federally owned and managed by the BLM. The predominant surface use is mineral exploration and production.
- C. Proximity of Water, Dwellings and Historical Sites:
 - Water:
 There are no reservoirs or streams in the immediate area.
 - Occupied Dwellings: There are no occupied dwellings or buildings in the area.
 - 3. Sites:
 An archeological reconnissance has been performed for this location and clearance has been granted.


12. Operator's Field Representative

Donald S. Barnes
Division Drilling Engineer
Tenneco Oil Company
720 South Colorado Blvd.
Penthouse
Denver, CO 80222
(303) 758-7130 Ext. 212

13. Certification

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drill site and access route; that I am familiar with the conditions as they actually exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and that the proposed work performed by Tenneco Oil Company and its contractors and subcontractos will conform to this plan.

Date:	9-3-79	Am June
		J. M. Lacey Division Production Manager

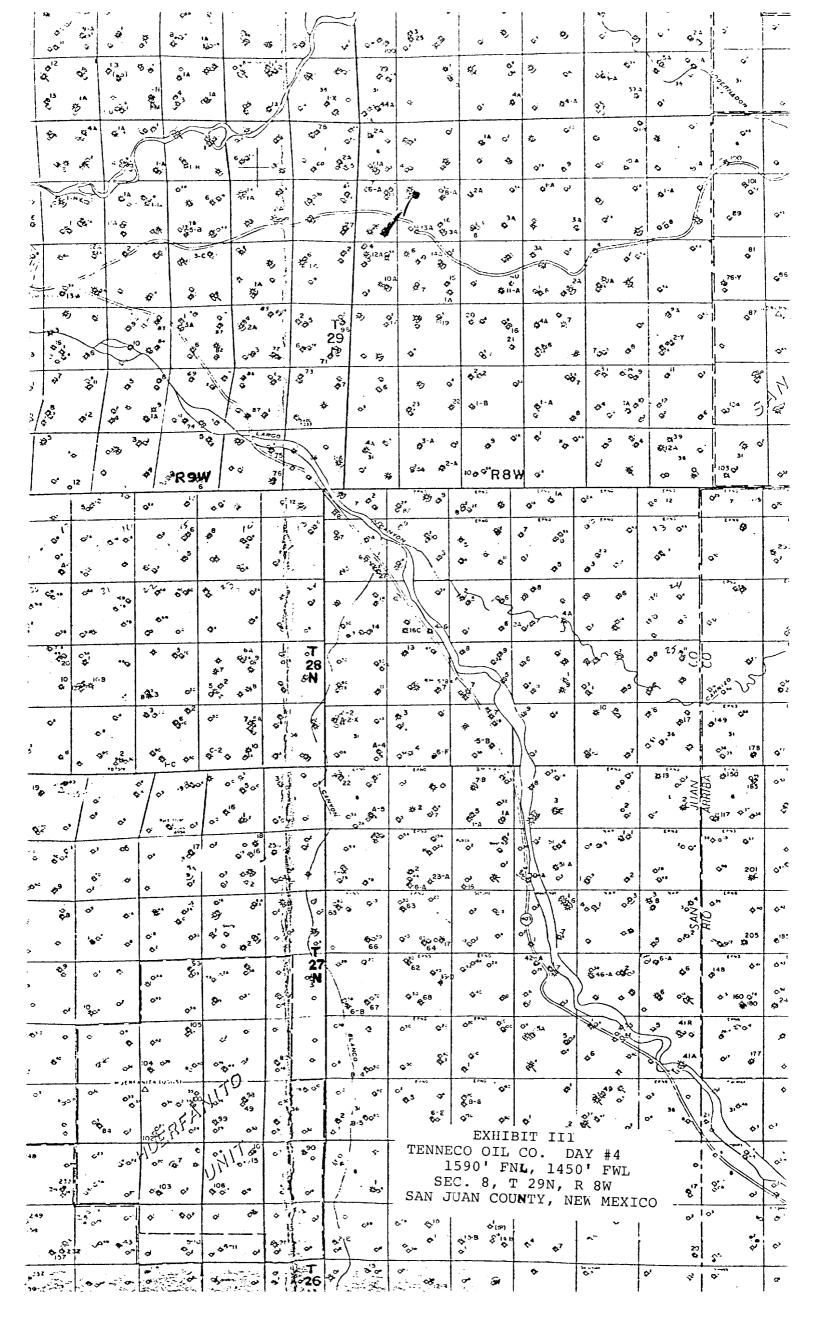

TENNECO OIL COMPANY

CALCULATION SHEET

