


Form 9-331b
(April 1952)

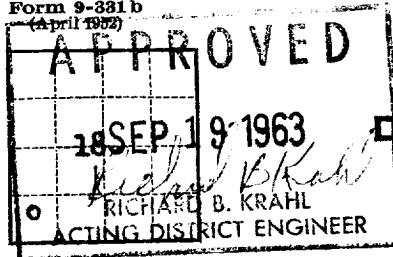

(SUBMIT IN TRIPLICATE)

**UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY**

Indian Agency _____
Window Rock, Arizona
Allottee Navajo Tribal
Lease No. 14-20-603-2023

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL	SUBSEQUENT REPORT OF WATER SHUT-OFF	
NOTICE OF INTENTION TO CHANGE PLANS	SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF	SUBSEQUENT REPORT OF ALTERING CASING	
NOTICE OF INTENTION TO REDRILL OR REPAIR WELL	SUBSEQUENT REPORT OF REDRILLING OR REPAIR	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE	SUBSEQUENT REPORT OF Plugging Back	X
NOTICE OF INTENTION TO PULL OR ALTER CASING	SUPPLEMENTARY WELL HISTORY	
NOTICE OF INTENTION TO ABANDON WELL		

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

September 17, 1963

Navajo Tract 2
Well No. 1 is located 990 ft. from SW line and 983 ft. from W line of sec. 18
SW SW Sec. 18 29N 15W N.M.P.M.
(1/4 Sec. and Sec. No.) (Twp.) (Range) (Meridian)
Wildcat San Juan New Mexico
(Field) (County or Subdivision) (State or Territory)

The elevation of the derrick floor above sea level is 5343 ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

Well plugged back as follows:

11,000' - 10,900' - 100' - 37.5 sax cement - Hole calipered 9"
10,800' - 10,700' - 100' - 65.5 sax cement - Hole calipered 12"
9,850' - 9,750' - 100' - 55 sax cement - Hole calipered 11"
9,100' - 9,000' - 100' - 55 sax cement - Hole calipered 11"
7,400' - 7,250' - 150' - 115 sax cement - Hole calipered 13"
6,320' - 6,220' - 100' - 50 sax cement - Hole calipered 10-1/2"
5,860' - 5,760' - 100' - 50 sax cement - Hole calipered 10-1/2"

Used a total of 428 sax regular Heat cement with 4/10 of 1% HEM retarder added to prevent flash set due to hole temperature of 250 deg. Halliburton cemented.

The Pure Oil Co. plugged back to 5,760', laid drill pipe down to 4,800'. Humble Oil & Refining accepted well in good condition at 1:00 p.m. 9-12-63.

Verbal approval for plugging back obtained from U.S.G.S. office, Farmington, N.M.
I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company THE PURE OIL COMPANY

Address P. O. Box 1611

Casper, Wyoming

234-1565



ORIGINAL SIGNED BY

R. E. DAVIS

R. E. Davis

Title District Office Manager