


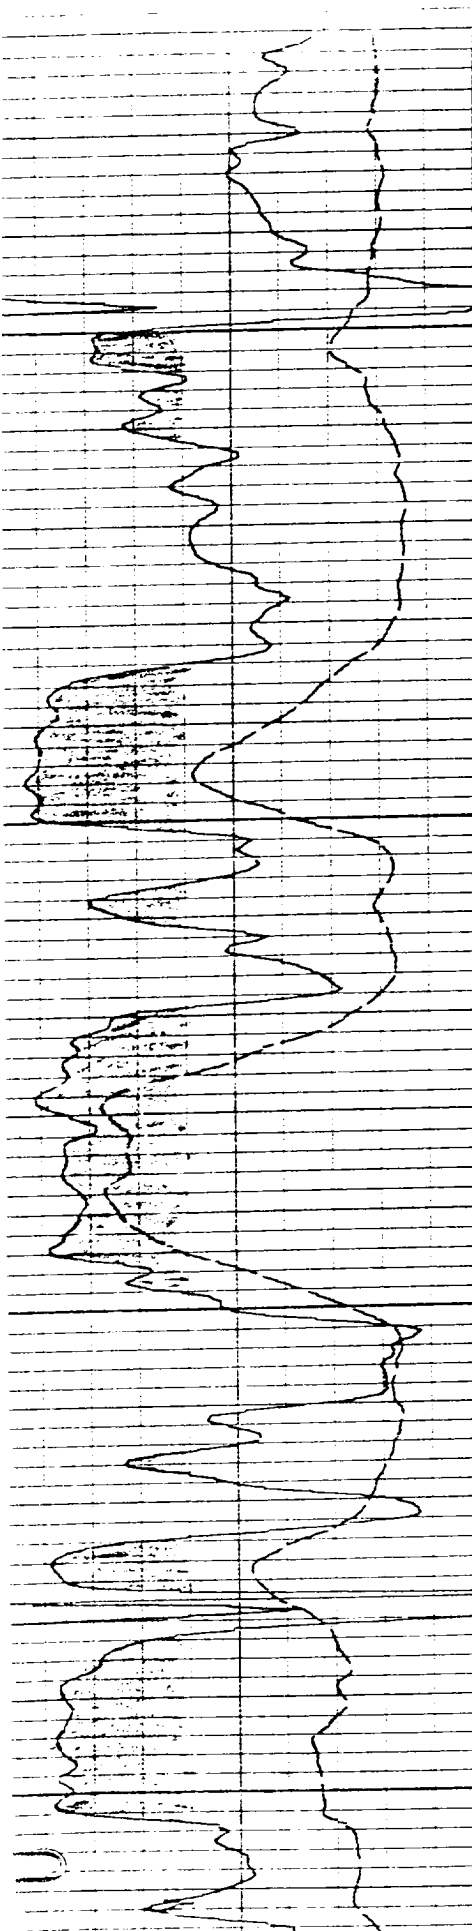

Top  
C. n. D. n.

| R  | Y | Sum |
|----|---|-----|
| 30 | 5 | 100 |
| 15 | 4 | 100 |

Top  
Main D. n. K.

8486

14

8500

8500

|      |   |     |
|------|---|-----|
| 0.50 | 0 |     |
| 0.50 | 2 | 100 |

8519

|     |   |    |
|-----|---|----|
| 200 | 5 | 36 |
| 200 | 6 | 20 |

25

|     |   |    |
|-----|---|----|
| 400 | 3 | 43 |
|-----|---|----|

8544

|     |   |    |
|-----|---|----|
| 120 | 3 | 82 |
|-----|---|----|

From 8486-8544 with 40 # crosslinker  
gelled water and 20-40 mesh sand  
down casing at 25 bpm. ps follows:

27,000 gal pot

2,000 gal 1ppg

2,000 gal 2ppg

2,000 gal 3ppg

9,000 gal 4ppg

10,000 gal 5ppg

8,300 gal flush

Stimulated Flow 300 MCFD against  
separator

|    |   |     |
|----|---|-----|
| 10 | 1 | 100 |
|----|---|-----|

|    |   |     |
|----|---|-----|
| 10 | 1 | 100 |
|----|---|-----|

|    |   |     |
|----|---|-----|
| 30 | 1 | 100 |
|----|---|-----|

8600