

DATE
06-17-97LOCATION ULSTR)
C-32-30N-12WFOOTAGE
660 FNL & 2320 FWLAPI NO.
30-045-09077

POOL

ELEVATION
5457'


Formation	Tops	Casing Record
PICTURED CLIFF	1547'	5 1/2" @ 1534'
FRUITLAND	1077'	O.H. @ 1623'
WATER SANDS	16'-48' & 552'-556'	

10-13-47 DRILLED A 8" HOLE TO 1623'
SET 5 1/2 CSG. @ 1534' CEMENTED WITH 50 SXS. CEMENT
TOP OF CEMENT APPX. 1257'

PLUGGING PROCEDURE

1. ND WH. NU BOP & TOOH WITH PRODUCTION EQUIPMENT.
2. TIH WITH TBG. TO APPX. 1584' & SPOT A 40 SX. PLUG & TAG @ 1484'
3. TIH WITH WIRELINE & PERF 4 SHOTS @ 1127'.
4. TIH WITH RETAINER TO APPX. 1077' & SET. PUMP 40SXS. THROUGH RET. & SPOT 6 SXS. ON RET.
5. TEST CSG.
6. GIH WITH WIRELINE AND PERF. 4 SHOTS AT 100'.
7. ESTABLISH CIRC. TO THE SURFACE & BULLHEAD CEMENT INSIDE AND OUTSIDE TO THE SURFACE.
8. IF UNABLE TO CIRC. PERF AT 30' AND CIRC.
9. CUT ANCHORS, RESTORE LOCATION AND INSTALL DRYHOLE MARKER.

1" 1226

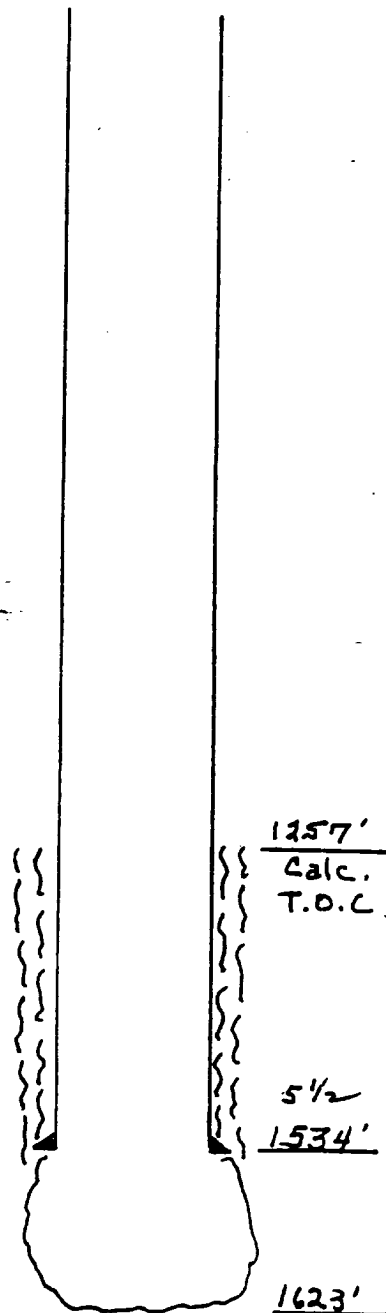

Current Wellbore