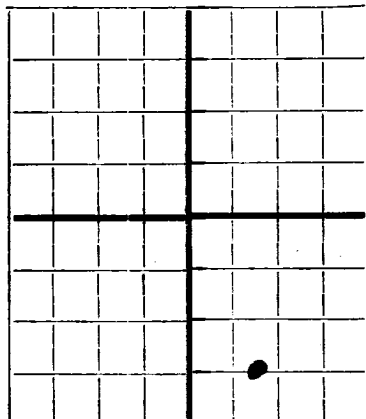


N

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

AREA 360 ACRES
LOCATE WELL CORRECTLY

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

B.M.H.S. Company **Antes, New Mexico**
Company or Operator Address
Wyer Well No. **2** in **254** of Sec. **23**, T. **30N**
Lease
R. **12W**, N. M. P. M., Field, **San Juan** County.
Well is **400** feet south of the North line and **1700** feet west of the East line of **Section 23**
If State land the oil and gas lease is No. Assignment No.
If patented land the owner is **H. L. Wyer**, Address **Antes, New Mexico**
If Government land the permittee is, Address
The Lessee is **B.M.H.S. Company**, Address **Antes, New Mexico**
Drilling commenced **November 20** 19 **46** Drilling was completed **January 11** 19 **47**
Name of drilling contractor **L.G. Stearns**, Address **Antes, New Mexico**
Elevation above sea level at top of casing **8400** feet.
The information given is to be kept confidential until 19.

OIL SANDS OR ZONES

No. 1, from **1550** to **1580** No. 4, from to
No. 2, from to No. 5, from to
No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from **120** to **130** feet. **Hole full**
No. 2, from **235** to **240** feet. **Sulphur water**
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
1 1/2	50	8		65'	70000				
1 1/4	40	8		352	"				
3/4	20	8		641	60000				
7	20	8		1500	70000				
5 1/2	15	8		1550	60000				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
7	5 1/2	1550	30	Hellhart		

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set
Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from feet to feet, and from feet to feet
Cable tools were used from **0** feet to **1588** feet, and from feet to feet

PRODUCTION

Put to producing, 19
The production of the first 24 hours was **1500** barrels of fluid of which % was oil; % emulsion; % water; and % sediment. Gravity, Be
If gas well, cu. ft. per 24 hours **1,700,000** Gallons gasoline per 1,000 cu. ft. of gas.
Rock pressure, lbs. per sq. in. **585**

EMPLOYEES

1,700,000, Driller, Driller
585, Driller, Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this

Place Date

day of, 19

Name

Position

Notary Public

Representing

Company or Operator

My Commission expires

Address

Drilling contractor
B.M.H.S. Company

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	48		Quick sand
48	62		Boulders
62	64		Blue sandy shale
64	120		Sand
120	125		Blue shale
125	150		Water sand Hole full water
150	187		Alamo
187	190		Blue shale
190	200		Alamo
200	205		Gray shale
205	230		Alamo
230	240		Sand, sulphur water, show gas
240	255		Sandy shale
255	260		Gravel
260	269		Blue shale
269	272		Gravel
272	277		Sand
277	282		Sandy shale
282	285		Green shale
285	310		Blue shale
310	363		Sandy shale
363	387		Blue shale
387	392		Gray shale
392	400		Brown shale
400	405		Gray shale
405	472		Sandy gray shale
472	483		Shells
483	520		Gray shale
520	535		Sandy gray shale
535	542		Shells
542	552		Gray shale
552	565		Sandy gray shale
565	603		Blue shale
603	617		Gray shale
617	670		Blue shale
670	694		Sandy shale
694	708		Gray shale
708	712		Water sand, 4 barrels hour
712	725		Blue shale
725	810		Sandy shale
810	820		Coarse gray sand
820	855		Sandy shale
855	870		Water sand
870	925		Gray shale
925	930		Blue shale
930	961		Sandy shale
961	1000		Blue shale
1000	1120		Gray shale
1120	1167		Blue & gray shale
1167	1247		Gray shale
1247	1300		Shells
1300	1320		Shells
1320	1330		Sandy shale
1330	1335		Gray sand
1335	1345		Coal, boiler water hour
1345	1350		Black shale
1350	1400		Brown shale
1400	1415		Sandy shale
1415	1420		Sand
1420	1440		Gray shale
1440	1461		Shale & coal streaks
1461	1461		Gray shale
1461	1500		Brown shale
1500	1510		Shale
1510	1515		Shale
1515	1544		Coal
1544	1550		Sandy shale, shells
1550	1565		Sand, 9" 452,000
1565	1585		" " 12" 521,000
1585	1591		" " 26" 784,000
1591	1596		" " 35" 2,000,000
1596	1600		" " 31 1,800,000
1600	1605		" " 31 1,800,000
1605	1605		
			Southern Union test after 3 day open flow
			1,700,000