

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

Sundry Notices and Reports on Wells

- | | |
|--|---|
| <p>1. Type of Well
GAS</p> <hr/> <p>2. Name of Operator
BURLINGTON
RESOURCES OIL & GAS COMPANY</p> <hr/> <p>3. Address & Phone No. of Operator
PO Box 4289, Farmington, NM 87499 (505) 326-9700</p> <hr/> <p>4. Location of Well, Footage, Sec., T, R, M
1650' FSL, 1805' FEL, Sec. 29, T-30-N, R-11-W, NMPM
<i>J</i></p> | <p>5. Lease Number
SF-078138</p> <p>6. If Indian, All. or
Tribe Name</p> <p>7. Unit Agreement Name</p>

<p>8. Well Name & Number
Morris A #11</p> <p>9. API Well No.
30-045-24142</p> <p>10. Field and Pool
Aztec Pictured Cliffs</p> <p>11. County and State
San Juan Co, NM</p> |
|--|---|

12. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OTHER DATA

Type of Submission	Type of Action
<input checked="" type="checkbox"/> Notice of Intent	<input checked="" type="checkbox"/> Abandonment
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Recompletion
<input type="checkbox"/> Final Abandonment	<input type="checkbox"/> Plugging Back
	<input type="checkbox"/> Casing Repair
	<input type="checkbox"/> Altering Casing
	<input type="checkbox"/> Other -
	<input type="checkbox"/> Change of Plans
	<input type="checkbox"/> New Construction
	<input type="checkbox"/> Non-Routine Fracturing
	<input type="checkbox"/> Water Shut off
	<input type="checkbox"/> Conversion to Injection

13. Describe Proposed or Completed Operations

It is intended to plug and abandon the subject well according to the attached procedure and wellbore diagram.

RECEIVED
FEB 28 1997
OIL CON. DIV.
DIST. 3

OIL CON. DIV. NM
97 FEB -4 PM 5:58

14. I hereby certify that the foregoing is true and correct.

Signed *Reggie Shadfield* (KM2) Title Regulatory Administrator Date 2/4/97

(This space for Federal or State Office use)

APPROVED BY /s/ Duane W. Spencer Title _____ Date FEB 24 1997

CONDITION OF APPROVAL, if any:

PLUG & ABANDONMENT PROCEDURE

Morris A #11
DPNO: 45257A
Pictured Cliffs
Unit J, Sec. 29, T30N, R11W
San Juan Co., New Mexico

Note: All cement volumes use 100% excess outside pipe and 50' excess inside pipe. The stabilizing wellbore fluid will be 8.3 ppg, sufficient to balance all exposed formation pressures.

1. Install and test location rig anchors. Prepare blow pit. Comply to all NMOCD, BLM, and BROGC safety regulations.
2. MOL and RU daylight pulling unit. Conduct safety meeting for all personnel on location. NU relief line. Blow down well and kill with water as necessary. ND wellhead and NU BOP. Test BOP.
3. **Plug #1: (Pictured Cliffs perfs and Fruitland top; 2156' - 1842'):** PU and RIH with 1-1/4" open-ended workstring to 2261' or as deep as possible. Pump 50 bbls water. Mix and pump 15 sxs Class B cement and spot a balanced plug inside casing to cover Pictured Cliffs perforations and Fruitland top. POOH with workstring and WOC, tag plug. Pressure test casing to 500 psi. PUH to 869'
4. **Plug #2 (Kirtland top, 869' - 600'):** Mix 9 sxs Class B cement and spot a balanced plug inside casing to cover Kirtland top. PUH to 600' and reverse circulate well clean. POOH with tubing.
5. **Plug #3 (Ojo Alamo top, 590' - 490'):** Perforate 2 holes @ 590'. Establish rate into squeeze holes. Mix 57 sxs Class B cement, pump down 2-7/8" casing, squeeze 50 sxs cement outside casing and leave 7 sxs cement inside casing to cover Ojo Alamo top, displace to 300'. POOH with workstring and WOC. Tag plug. Pressure test casing to 500 psi. POOH.
6. **Plug #4 (Surface, 179' - Surface):** Perforate 2 holes @ 179'. Establish circulation out bradenhead valve. Mix and pump approximately 65 sxs Class B cement down 2-7/8" casing, circulate good cement out bradenhead valve. Shut in well and WOC.
7. NU BOP and cut off wellhead below surface casing. Install P&A marker to comply with regulations. RD, MOL, cut off anchors, and restore location.

Recommended: *KE Midkiff* 11/31/97
Operations Engineer

Approval: _____
Drilling Superintendent

Concur: _____
Production Superintendent


Contacts:	Operations Engineer	Kevin Midkiff	326-9807 (Office) 564-1653 (Pager)
	Foreman:	Johnny Ellis	326-9822 (Office) 327-8144 (Pager)

Morris A #11

Current -- 1/29/97

Spud: 11/28/80
Completed : 1/27/81
Elevation: 5838' GL
5849' KB
Workovers: None

DPNO: 45257A
Pictured Cliffs
1650' FSL, 1805' FEL
Sec. 29, T30N, R11W, San Juan County, NM
Lat/Long: 00°00.00", 000°00.00"

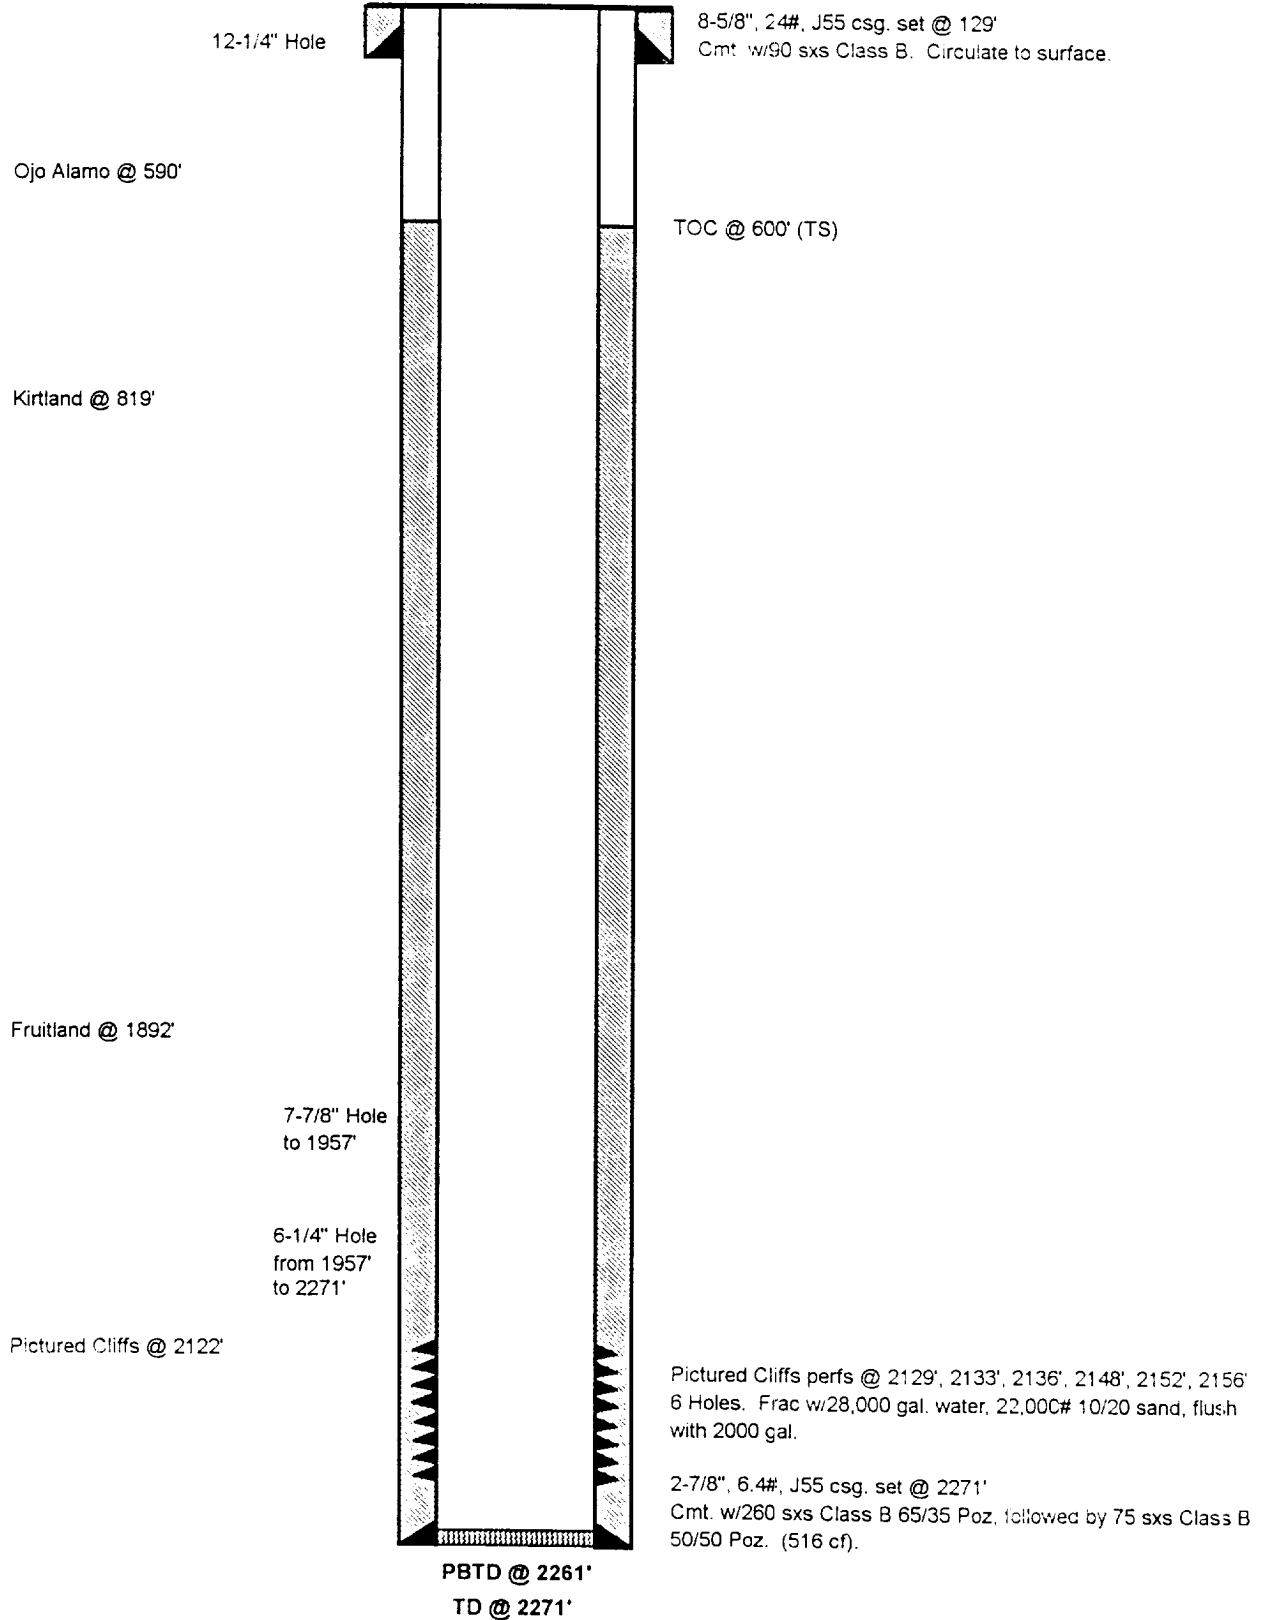

Morris A #11

Proposed P&A

Spud: 11/28/80
Completed: 1/27/81
Elevation: 5838' GL
5849' KB
Workovers: None

DPNO: 45257A
Pictured Cliffs
1650' FSL, 1805' FEL
Sec. 29, T30N, R11W, San Juan County, NM
Lat/Long: 36°46.83', 108°06.28"

