


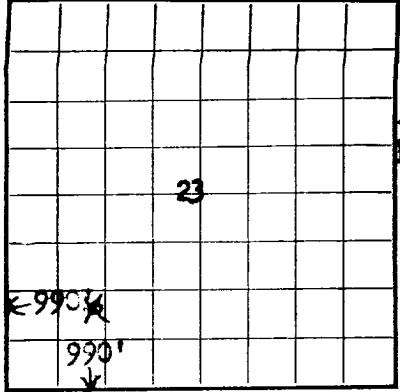

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

LOG OF OIL OR GAS WELL

LOCATE WELL CORRECTLY

Company Delhi Oil Corporation Address Box 1175 Farmington, New Mexico
Lessor or Tract Florance Field Blanco State New Mexico
Well No. 1-6 Sec. 23 T. 30N R. 9W Meridian NMPM County San Juan
Location 990 ft. N. of S Line and 990 ft. E. of W Line of Sec. 23 Elevation 6077
(Derrick floor relative to sea level)

The information given herewith is a complete and correct record of the well and all work done thereon
so far as can be determined from all available records.
Signed [Signature]
Date 10-20-54 Title Dist. Supt.

The summary on this page is for the condition of the well at above date.

Commenced drilling 9-24, 19 54 Finished drilling 10-13, 19 54
Work over

OIL OR GAS SANDS OR ZONES
(Denote gas by G)

No. 1, from 4425 to 4615-G No. 4, from _____ to _____
No. 2, from 5010 to 5130-G No. 5, from _____ to _____
No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

No. 1, from _____ to _____ No. 3, from _____ to _____
No. 2, from _____ to _____ No. 4, from _____ to _____

CASING RECORD

Size casing	Weight per foot	Threads per inch	Make	Amount	Kind of shoe	Cut and pulled from	Perforated		Purpose
							From	To	
13 3/8	48	8 RT	Spring	202	None				Surface
7 1/2	120	8 RT	Spring	202	None				Surface
2 1/2	47.70	8 RT	Spring	202	None				Surface

MUDDING AND CEMENTING RECORD

Size casing	Where set	Number sacks of cement	Method used	Mud gravity	Amount of mud used
13 3/8	202	220	Halliburton		
7 1/2	4424	250	"		

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth set _____
Adapters—Material _____ Size _____

SHOOTING RECORD

Size	Shell used	Explosive used	Quantity	Date	Depth shot	Depth cleaned out
Sand-oil treated interval	4424-4650	w/8800 gals. diesel	4100#		2000 to 2100	
"	"	"	5037-5204	w/10000	7200#	1850-2250

TOOLS USED

Rotary tools were used from 0 w/mud feet to 4426 feet, and from 4438 w/gas feet to 5204 feet
Cable tools were used from 4426 feet to 4621 feet, and from _____ feet to _____ feet

DATES


10-26-54, 19 54 Put to producing _____, 19 _____
The production for the first 24 hours was _____ barrels of fluid of which _____% was oil; _____%
emulsion; _____% water; and _____% sediment. Gravity, °Bé. _____
If gas well, cu. ft. per 24 hours 17238 Gallons gasoline per 1,000 cu. ft. of gas _____
Rock pressure, lbs. per sq. in. 31-171 hrs. CP-1017# TP-1013#

EMPLOYEES

J. B. Williams, Driller C. E. Moore, Driller
C. E. Owen, Driller G. W. Flemmons, Driller

FORMATION RECORD

FROM—	TO—	TOTAL FEET	FORMATION
0	2805	2805	Interbedded sand & shales-top-P. C. 2805
2805	2842	37	Sand
2842	4425	1583	Shale with thin beds of sand & sandy shale-top Lewis 2842
4425	4615	190	Sand with thin beds of shale-Top Cliffhouse 4425
4615	5010	395	Carbonaceous shale streaks of sand & coal top-Manefee-4615
5010	5130	120	Sand-Top Point Lookout 5010
5130	5240-T.D. 5204	74	Shale-Top Mancos 5130

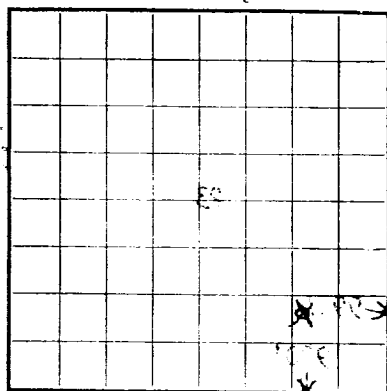

LOG OF OIL OR GAS WELL

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

UNITED STATES

PLEASE OR PERMIT TO REVERSE

SERIAL NUMBER

U.S. Land Office

A. Approval expires 12-31-25.
Budget Bureau No. 42-R-3223.

51. 3/20/20

Date _____ Title _____
 Signed _____
 The information given herewith is a complete and correct record of the well and all work done thereon
 as far as can be determined from all available records.
 Location 220 ft. N. of line and 22 ft. E. of line of of _____ line of _____
 Well No. 1-0 Sec. 22 T. 20 R. 10 Meridian _____ County _____ State _____
 Lessor or Tract _____ Field _____ State _____
 Company _____ Address _____

The summary on this page is for the condition of the well at above date.

Commenced drilling	1911	1912	Finished drilling	1913
--------------------	------	------	-------------------	------

OIL OR GAS SANDS OR ZONES

(Derepte vas by G)

No. 1, from _____ to _____
No. 2, from _____ to _____
No. 3, from _____ to _____
No. 4, from _____ to _____
No. 5, from _____ to _____
No. 6, from _____ to _____

IMPORTANT WATER SANDS

----- to ----- from, I. No. -----
----- to ----- from, 2. No.

CASING RECORD

HISTORY OF OIL OR GAS WELL									
Casing Size per foot	Weight per foot	Threads per inch	Make	Amount	Kind of shoe	Cut and pulled from	Perforated		Purpose
							From—	To—	

It is of the greatest importance to have a complete history of the well. Please state in detail the dates of redrilling, reworking, and the reasons for the work and its results. If there were any changes made in the casing, state fully, and if any casing was "sidetracked" or left in the well, give its size and location. If the well has been dynamited, give date, size, position, and number of shots. If plugs or bridges were put in to test for water, state kind of material used, position, and results of pumping or burning.

U. S. GOVERNMENT PRINTING OFFICE
16-43094-2

MIDDING AND CEMENTING RECORD

[illegible]

PLUGS AND ADAPTERS

[illegible]

SHOOTING RECORD

[illegible]

TOOLS USED

Rotary tools were used from	feet to	feet, and from	feet to
Chisel tools were used from	feet to	feet, and from	feet to

DATES

If gas well, cu. ft. per 24 hours emulsion; ----- % water; and ----- % sediment.	The production for the first 24 hours was ----- barrels of fluid of which ----- % was oil; ----- Put to producing -----, 19
---	--

EMPLOYEES

Driller	Driller
Driller	Driller

FORMATION RECORD

FROM	TO	TOTAL FEET	FORMATION
130	140	10	CLAY
140	150	10	CLAY
150	160	10	CLAY
160	170	10	CLAY
170	180	10	CLAY
180	190	10	CLAY
190	200	10	CLAY
200	210	10	CLAY
210	220	10	CLAY
220	230	10	CLAY
230	240	10	CLAY
240	250	10	CLAY
250	260	10	CLAY
260	270	10	CLAY
270	280	10	CLAY
280	290	10	CLAY
290	300	10	CLAY
300	310	10	CLAY
310	320	10	CLAY
320	330	10	CLAY
330	340	10	CLAY
340	350	10	CLAY
350	360	10	CLAY
360	370	10	CLAY
370	380	10	CLAY
380	390	10	CLAY
390	400	10	CLAY
400	410	10	CLAY
410	420	10	CLAY
420	430	10	CLAY
430	440	10	CLAY
440	450	10	CLAY
450	460	10	CLAY
460	470	10	CLAY
470	480	10	CLAY
480	490	10	CLAY
490	500	10	CLAY
500	510	10	CLAY
510	520	10	CLAY
520	530	10	CLAY
530	540	10	CLAY
540	550	10	CLAY
550	560	10	CLAY
560	570	10	CLAY
570	580	10	CLAY
580	590	10	CLAY
590	600	10	CLAY
600	610	10	CLAY
610	620	10	CLAY
620	630	10	CLAY
630	640	10	CLAY
640	650	10	CLAY
650	660	10	CLAY
660	670	10	CLAY
670	680	10	CLAY
680	690	10	CLAY
690	700	10	CLAY
700	710	10	CLAY
710	720	10	CLAY
720	730	10	CLAY
730	740	10	CLAY
740	750	10	CLAY
750	760	10	CLAY
760	770	10	CLAY
770	780	10	CLAY
780	790	10	CLAY
790	800	10	CLAY
800	810	10	CLAY
810	820	10	CLAY
820	830	10	CLAY
830	840	10	CLAY
840	850	10	CLAY
850	860	10	CLAY
860	870	10	CLAY
870	880	10	CLAY
880	890	10	CLAY
890	900	10	CLAY
900	910	10	CLAY
910	920	10	CLAY
920	930	10	CLAY
930	940	10	CLAY
940	950	10	CLAY
950	960	10	CLAY
960	970	10	CLAY
970	980	10	CLAY
980	990	10	CLAY
990	1000	10	CLAY