

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEYSUBMIT IN TRIPLICATE*
(Other instructions on re-
verse side)Form approved.
Budget Bureau No. 42-R1424.

5. LEASE DESIGNATION AND SERIAL NO.

SF 081299-A

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals.)

1. OIL WELL <input checked="" type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER <input type="checkbox"/>		7. UNIT AGREEMENT NAME	
2. NAME OF OPERATOR		J. J. Lommori "A"	
3. ADDRESS OF OPERATOR		8. FARM OR LEASE NAME	
Clinton Oil Company		N. E. Hogback Unit	
4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.* See also space 17 below.) At surface		9. WELL NO.	
1980' FSL & 660' FWL		15	
14. PERMIT NO.		10. FIELD AND POOL, OR WILDCAT	
15. ELEVATIONS (Show whether DF, RT, GR, etc.)		Horseshoe Gallup	
5370 G. L.		11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA	
		Sec. 13-T30N-R16W	
		12. COUNTY OR PARISH	
		San Juan	
		13. STATE	
		N. M.	

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF

FRACTURE TREAT

SHOOT OR ACIDIZE

REPAIR WELL

(Other)

PULL OR ALTER CASING

MULTIPLE COMPLETE

ABANDON*

CHANGE PLANS

SUBSEQUENT REPORT OF:

WATER SHUT-OFF

FRACTURE TREATMENT

SHOOTING OR ACIDIZING

(Other)

REPAIRING WELL


ALTERING CASING

ABANDONMENT*

(NOTE: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Set sand bridge 3958' - 3700' with 258 gals.
Set top rubber cement plug on top bridge
Set 15 sk. cement plug 3700' - 3580'
Shoot 5 1/2 csg. @2700'
Pull & lay down csg.
Spot 25 sk. plug 2750' - 2650'
Spot 50 sk. plug 2190' - 2040'
Spot 30 sk. plug 590' - 490'
Spot 20 sk. plug 215' - 165'
Set 10 sk. plug at surface
Erect hole marker

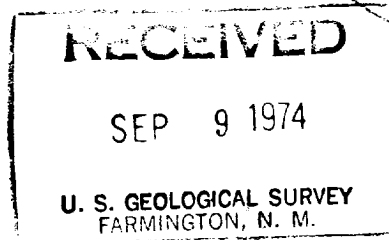

18. I hereby certify that the foregoing is true and correct

SIGNED Dean B. BarnesTITLE Production EngineerDATE September 6, 1974

(This space for Federal or State office use)

APPROVED BY

CONDITIONS OF APPROVAL, IF ANY:

TITLE

DATE