


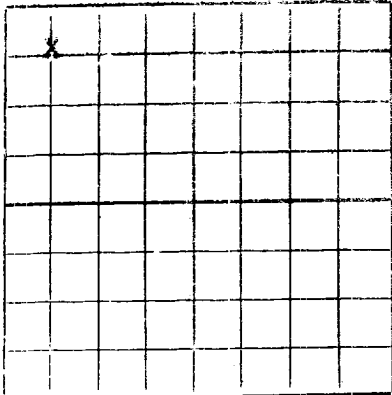

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD

Mail to District Office, Oil Conservation Commission, to which Form C-101 was sent not later than twenty days after completion of well. Follow instructions in Rules and Regulations of the Commission. Submit in QUINTUPLICATE. If State Land submit 6 Copies

AREA 640 ACRES
LOCATE WELL CORRECTLY

El Paso Natural Gas Products Company

Burroughs State

(Company or Operator)

(Lease)

Well No. 1, in NW 1/4 of NW 1/4 of Sec. 2, T. 30N, R. 16W, NMPM.
Horseshoe Gallup Pool, San Juan County.

Well is 660 feet from North line and 660 feet from West line
of Section 2. If State Land the Oil and Gas Lease No. is E-3150-4

Drilling Commenced August 13, 1959 Drilling was Completed August 20, 1959

Name of Drilling Contractor Banner Drilling Company

Address Farmington, New Mexico

Elevation above sea level at Top of Tubing Head 5669 The information given is to be kept confidential until
, 19.


OIL SANDS OR ZONES

No. 1, from 1578 to 1616 No. 4, from to
No. 2, from to No. 5, from to
No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.
No. 2, from to feet.
No. 3, from to feet.
No. 4, from to feet.



CASING RECORD

SIZE	WEIGHT PER FOOT	NEW OR USED	AMOUNT	KIND OF SHOE	CUT AND PULLED FROM	PERFORATIONS	PURPOSE
8-5/8"	32.00#	New	142	Conventional			Surface
5-1/2"	15.50#	New	1729	Conventional		1578-1616	Production

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
12-1/4	8-5/8"	149	125	Circulated		
7-7/8	5-1/2"	1736	100	Single Stage		

RECORD OF PRODUCTION AND STIMULATION

(Record the Process used, No. of Qts. or Gals. used, interval treated or shot.)

8-29-59 SOF perf. interval 1578-1616 with 65,500 gals. oil and 100,000# (20-40) sand, flush with 1680 gals. oil. Injection Rate 61.7 bbls./min. Maximum treating pressure 1000 psi.; Breakdown pressure 700 psi.; Average treating pressure 950 psi. Injected 38 rubber balls halfway through treatment, 100 psi. increase.

Result of Production Stimulation Unknown

Depth Cleaned Out 1670'