

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil well ☐ gas well ☒ other

2. NAME OF OPERATOR  
Tenneco Oil Company

3. ADDRESS OF OPERATOR  
P. O. Box 3249, Englewood, CO 80155

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)  
AT SURFACE: 1650' FSL 1650' FWL  
AT TOP PROD. INTERVAL:  
AT TOTAL DEPTH:


16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

TEST WATER SHUT-OFF ☐  
FRACTURE TREAT ☐  
SHOOT OR ACIDIZE ☐  
REPAIR WELL ☐  
PULL OR ALTER CASING ☐  
MULTIPLE COMPLETE ☐  
CHANGE ZONES ☐  
ABANDON\* ☐  
(other)

SUBSEQUENT REPORT OF:

☐  
☐  
☐  
☐  
☐  
☐  
☐  
☒

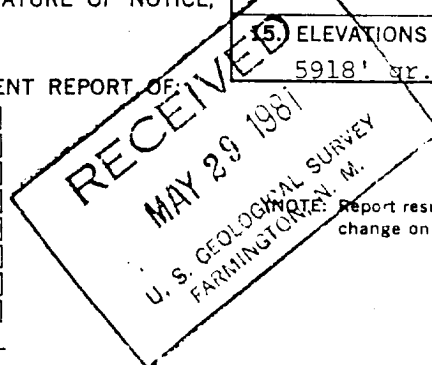

5. LEASE

SF-078042

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

Giomi Com A

9. WELL NO.

1

10. FIELD OR WILDCAT NAME

Blanco Pictured Cliffs

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA

Sec. 28, T30N, R9W

12. COUNTY OR PARISH

San Juan

13. STATE

New Mexico

14. API NO.

15. ELEVATIONS (SHOW DF, KDB, AND WD)

5918' gr.

NOTE: Report results of multiple completion or zone change on Form 9-330.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

5/20/81 - MIRUSU. POOH w/rods and tbq. RIH w/1-1/2" tbq. Squeeze P.C. perfs 2599-2450' w/75 sx cmt. POOH. Set the following plugs:

Fruitland 2450-2290' 25 sk Class B cmt  
Farmington 1950-1600' 25 sk Class B cmt  
Ojo Alamo 1480-1420' 25 sk Class B cmt  
Surface 120'-surface 25 sk Class B cmt

Cut off 4.5' below ground level and set P & A marker. Clean, grade, reseed per USGS requirements. RDMOSU.

Subsurface Safety Valve: Manu. and Type \_\_\_\_\_ Set @ \_\_\_\_\_ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED Carly Platter Asst. Div. Adm. Mgr. DATE 5/21/81

(This space for Federal or State office use)

APPROVED BY \_\_\_\_\_ TITLE \_\_\_\_\_ DATE \_\_\_\_\_

CONDITIONS OF APPROVAL, IF ANY:

WR 1-22-85 BC

APPROVED  
AS AMENDED

Approved as to plugging of the well bore  
Liability under bond is retained until  
surface restoration is completed.

FARMINGTON COPY  
Instructions on Reverse Side

JAN 18 1985  
J. MILLENBACH  
AREA MANAGER