

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☐ well gas ☒ well other ☐

2. NAME OF OPERATOR

El Paso Natural Gas Company

3. ADDRESS OF OPERATOR

Box 4289, Farmington, New Mexico 87499

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)

AT SURFACE: 1800'S, 990'E

AT TOP PROD. INTERVAL:

AT TOTAL DEPTH:


16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

TEST WATER SHUT-OFF ☐
FRACTURE TREAT ☐
SHOOT OR ACIDIZE ☐
REPAIR WELL ☐
PULL OR ALTER CASING ☐
MULTIPLE COMPLETE ☐
CHANGE ZONES ☐
ABANDON* ☐
(other) ☐

SUBSEQUENT REPORT OF:

☐
☐
☒
☐
☐
☐
☐
☐

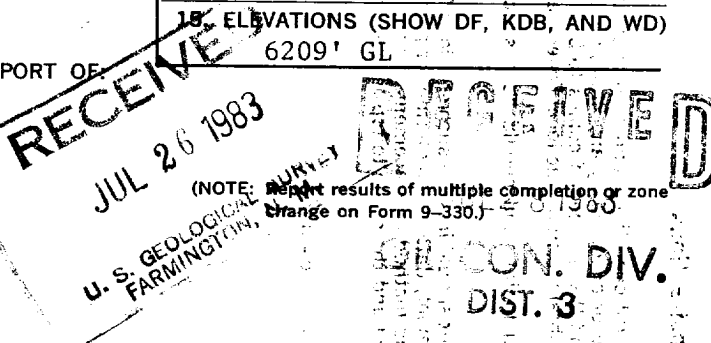

5. LEASE

SF 078200-B

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

Riddle B

9. WELL NO.

8

10. FIELD OR WILDCAT NAME

Blanco Pictured Cliffs Ext.

11. SEC., T., R., M. OR BLK. AND SURVEY OR AREA

Sec. 23, T-30-N, R-10-W
N.M.P.M.

12. COUNTY OR PARISH

San Juan

13. STATE

New Mexico

14. API NO.

15. ELEVATIONS (SHOW DF, KDB, AND WD)

6209' GL

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

7-14-83 Pulled tubing and packer. Set sand plug. Tagged sand at 2718'. Trip in hole w/slimline drill pipe & packer. Isolated casing leak between surface and 320'. Squeezed w/118 cu. ft. cement. Final pressure 100 psi. W.O.C. 18 hours.
7-15-83 Tagged cement at 33'. Drilled cement to 308'. Pressure tested to 750 psi. Held O. K.
7-16-83 Ran casing scraper and cleaned out to total depth w/gas. Ran 87 joints 1 1/4", 2.33#, J-55 tubing (2826') set at 2837'. Baker Model C-1 invertible packer run 3 joints off bottom at 2738'. Loaded annulus w/corrosion inhibitor.

Subsurface Safety Valve: Manu. and Type _____ Set @ _____ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED D. G. Brisco TITLE Drilling Clerk DATE July 26, 1983

(This space for Federal or State office use)

APPROVED BY _____ TITLE _____ DATE _____
CONDITIONS OF APPROVAL, IF ANY:

ACCEPTED FOR RECORD

JUL 27 1983