

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUBMIT IN TELETYPE
(Other instructions on reverse side)

Form approved
by Post Bureau (Form 9-331)
U. S. DEPARTMENT OF THE INTERIOR

NY 03195

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.
Use APPLICATION FOR PERMIT for such proposals.)



1. OIL WELL ☐ GAS WELL ☒ OTHER ☐	2. NAME OF OPERATOR El Paso Natural Gas Company	3. ADDRESS OF OPERATOR PO Box 990, Farmington, NM	4. LOCATION OF WELL (Specify location clearly and in accordance with any State requirements. See also space 17 below.) At surface 1500'N, 810'W	5. PERMIT NO.	6. ELEVATIONS (Show whether DT, ST, CR, etc.) 6632'GL	7. NAME OF OPERATOR El Paso Natural Gas Company	8. FIELD OR LEASE NAME Sunny H	9. COUNTY OR RANGE 2	10. TOWNSHIP AND RANGE, OR SECTION Blanco Pictured Cliffs Ext.	11. TOWNSHIP, RANGE, OR SECTION Sec. 11, T-30-N, R-10-W	12. COUNTY OR PARISH NM	13. STATE San Juan New Mexico
--	--	--	--	---------------	--	--	-----------------------------------	-------------------------	---	--	----------------------------	----------------------------------

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:		SUBSEQUENT ACTION OF:	
TEST WATER SHUT-OFF	☐	WATER SHUT-OFF	☒
FRACURE TREAT	☐	FRACURE TREATMENT	☒
SHOOT OR ACIDIZE	☐	SHOOTING OR ACIDIZING	☐
REPAIR WELL	☐	(Other)	☐
(Other)	☐	(Note: Report results of well completion or recompleting)	☐
FILL OR ALTER CASING	☐	REPAIRING WELL	☐
MULTIPLE COMPLETE	☐	ALTERING CASING	☐
ABANDON*	☐	ABANDONMENT	☐
CHANGE PLANS	☐		☐

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths or all markers and times pertinent to this work.)

- 1-17-73 TD 3376'. Ran 111 joints 2 7/8', 6.4#, JS production casing, 3366' set at 3376'. Baffle set at 3366'. Cemented with 488 cu. ft. cement. WOC 18 hours. Top of cement at 1210'.
- 5-29-73 PBTD 3366'. Tested casing to 4000#-OK. Perf'd 3300-18' and 3328-40' with 30 shots per zone. Frac'd with 30,000# 10/20 sand and 30,200 gallons treated water. Dropped one set of 30 balls. Flushed with 840 gallon water.

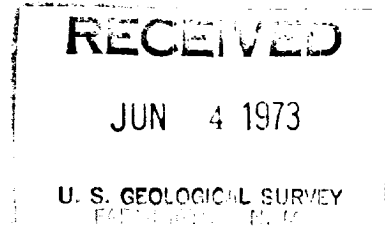

18. I hereby certify that the foregoing is true and correct

SIGNED [Signature] TITLE Drilling Clerk DATE May 31, 1973

(This space for Federal or State office use)

APPROVED BY _____ TITLE _____ DATE _____

CONDITIONS OF APPROVAL, IF ANY: