

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☐ well ☐ gas ☒ well ☐ other ☐

2. NAME OF OPERATOR
El Paso Natural Gas Company

3. ADDRESS OF OPERATOR
Box 990, Farmington, New Mexico

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 1460'N, 1105'W
AT TOP PROD. INTERVAL:
AT TOTAL DEPTH:

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:	SUBSEQUENT REPORT OF:
TEST WATER SHUT-OFF ☐	☒
FRACTURE TREAT ☐	☒
SHOOT OR ACIDIZE ☐	☐
REPAIR WELL ☐	☐
PULL OR ALTER CASING ☐	☐
MULTIPLE COMPLETE ☐	☐
CHANGE ZONES ☐	☐
ABANDON* ☐	☐
(other) ☐	☐

5. LEASE
SF 078386 A

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME
Sunray G

9. WELL NO.
1A

10. FIELD OR WILDCAT NAME
Blanco MV

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA Sec 21, T-31-N, R-9-W
N. M. P. M.

12. COUNTY OR PARISH
San Juan

13. STATE
N. M.

14. API NO.

15. ELEVATIONS (SHOW DF, KDB, AND WD)
6473' GL

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

5/24/78 T.D. 3657'. Ran 120 joints 7", 20#, K-55 intermediate casing, 3646' set at 3657'. Cemented with 493 cu. ft. cement. W.O.C. 12 hours, held 1200#/30 minutes. Top of cement at 1500'

5/28/78 T.D. 6034'. Ran 77 joints 4 1/2", 10.5#, K-55 casing liner, 2548' set 3486-6034'. Float collar set at 6017'. Cemented with 438 cu. ft. cement. WOC 18 hours.

7/26/78 P.B.T.D. 6017'. Tested casing to 3500#, O.K. Perfed C.H. and Men. 4853, 5093, 5113, 5141, 5155, 5160, 5164, 5169, 5195, 5201, 5207, 5336, 5341, 5369, 5461' w/1 SPZ. Fraced with 54,000# 20/40 sand and 111,922 gallons treated water. Flushed with 7140 gallons water. Perfed lower and Massive P.L. 5519, 5543, (OVER) Subsurface Safety Valve: Manu. and Type _____ Set @ _____ Ft.


18. I hereby certify that the foregoing is true and correct

SIGNED A. P. Busco TITLE Drilling Clerk DATE 8-2-78

(This space for Federal or State office use)

APPROVED BY _____ TITLE _____ DATE _____
CONDITIONS OF APPROVAL, IF ANY:

*See Instructions on Reverse Side

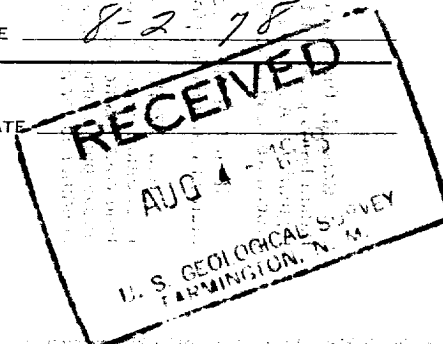

Instructions

General: This form is designed for submitting proposals to perform certain well operations, and reports of such operations when completed, as indicated, on Federal and Indian lands pursuant to applicable Federal law and regulations, and, if approved or accepted by any State, on all lands in such State, pursuant to applicable State law and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local, area, or regional procedures and practices, either are shown below or will be issued by, or may be obtained from, the local Federal and/or State office.

Item 4: If there are no applicable State requirements, locations on Federal or Indian land should be described in accordance with Federal requirements. Consult local State or Federal office for specific instructions.

Item 17: Proposals to abandon a well and subsequent reports of abandonment should include such special information as is required by local Federal and/or State offices. In addition, such proposals and reports should include reasons for the abandonment; data on any former or present productive zones, or other zones with present significant fluid contents not sealed off by cement or otherwise; depths (top and bottom) and method of placement of cement plugs; mud or other material placed below, between and above plugs; amount, size, method of parting of any casing, liner or tubing pulled and the depth to top of any left in the hole; method of closing top of well; and date well site conditioned for final inspection looking to approval of the abandonment.

GPO : 1975 O - 214-149

5564, 5569, 5601, 5608, 5610, 5613, 5628, 5631, 5659, 5665, 5684,
5755, 5777, 5805, 5847, 5865, 5897, 5903, 5970 w/1 SPZ. Fraced
with 67,000 # 20/40 sand and 136,920 gallons treated water.
Flushed with 7560 gal. water.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

WELL ABANDONMENT REPORT

WELL IDENTIFICATION DATA

WELL LOCATION DATA

WELL DEPTH DATA

WELL CLOSURE DATA

WELL CONDITION DATA

WELL ABANDONMENT DATA

WELL ABANDONMENT DATA

WELL ABANDONMENT DATA

WELL ABANDONMENT DATA

WELL ABANDONMENT DATA

WELL ABANDONMENT DATA

WELL ABANDONMENT DATA

WELL ABANDONMENT DATA

WELL ABANDONMENT DATA

WELL ABANDONMENT DATA

WELL ABANDONMENT DATA

WELL ABANDONMENT DATA

WELL ABANDONMENT DATA

WELL ABANDONMENT DATA

WELL ABANDONMENT DATA

WELL ABANDONMENT DATA

WELL ABANDONMENT DATA

WELL ABANDONMENT DATA

WELL ABANDONMENT DATA

WELL ABANDONMENT DATA

WELL ABANDONMENT DATA

WELL ABANDONMENT DATA

WELL ABANDONMENT DATA

WELL ABANDONMENT DATA

WELL ABANDONMENT DATA

WELL ABANDONMENT DATA

WELL ABANDONMENT DATA

WELL ABANDONMENT DATA

WELL ABANDONMENT DATA

WELL ABANDONMENT DATA