

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

SUBMIT IN TRIPLICATE\*  
(Other instructions on reverse side)

Form approved.  
Budget Bureau No. 42-R1424.

5. LEASE DESIGNATION AND SERIAL NO.

SF-078198

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.  
Use "APPLICATION FOR PERMIT—" for such proposals.)

1. OIL WELL ☐ GAS WELL ☒ OTHER

2. NAME OF OPERATOR  
Southland Royalty Company

3. ADDRESS OF OPERATOR  
P. O. Drawer 570, Farmington, New Mexico

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.\*  
See also space 17 below.)  
At surface  
820' FSL & 1550' FEL

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME  
Nye

9. WELL NO.  
#1-A

10. FIELD AND POOL, OR WILDCAT  
Blanco Mesa Verde

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA

Section 12, T30N, R11W

14. PERMIT NO.  
15. ELEVATIONS (Show whether DF, RT, GR, etc.)  
6049' GR

12. COUNTY OR PARISH  
San Juan  
13. STATE  
New Mexico

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:


TEST WATER SHUT-OFF ☐ PULL OR ALTER CASING ☐  
FRACTURE TREAT ☐ MULTIPLE COMPLETE ☐  
SHOOT OR ACIDIZE ☐ ABANDON\* ☐  
REPAIR WELL ☐ CHANGE PLANS ☐  
(Other) ☐

SUBSEQUENT REPORT OF:

WATER SHUT-OFF ☐ REPAIRING WELL ☐  
FRACTURE TREATMENT ☐ ALTERING CASING ☐  
SHOOTING OR ACIDIZING ☐ ABANDONMENT\* ☐  
(Other) Spud and Casing Report ☒  
(NOTE: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

5-24-78 Spudded 12-1/4" surface hole at 9:45 AM to a TD 225'. Ran 5 joints of 9-5/8", 36#, K-55 casing. Set at 223'. Cemented with 120 sacks Class "B" with 1/4# gel flake per sack and 3% CaCl<sub>2</sub>. Cement circ. to surface. Plug down at 4:00 PM 5-24-78.

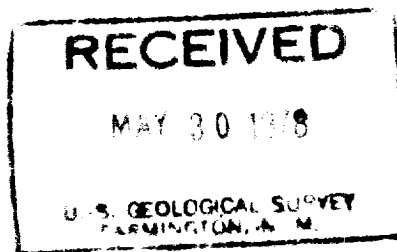

18. I hereby certify that the foregoing is true and correct

SIGNED [Signature] TITLE District Production Manager DATE May 26, 1978

(This space for Federal or State office use)

APPROVED BY \_\_\_\_\_ TITLE \_\_\_\_\_ DATE \_\_\_\_\_  
CONDITIONS OF APPROVAL, IF ANY:

\*See Instructions on Reverse Side