UNITED STATES DEPARTMENT OF THE INTERIOR DELVE BUREAU OF LAND MANAGEMENT BLM

Sundry Notices and	i Reports on Wek	4\$ 1:35		
1. Type of Well GAS	070 FARMIN		5. 6.	ease Number F-078439 f Indian, All. or Tribe Name
			7.	Unit Agreement Name
2. Name of Operator				
BURLINGTON RESOURCES OIL & GAS C	OMPANY		8.	Well Name & Number
3. Address & Phone No. of Operator PO Box 4289, Farmington, NM 87499	(505) 326-9700	-	9.	Johnston Federal #12 API Well No. 30-045-22987
4. Location of Well, Footage, Sec., T,	R, M	-	10.	Field and Pool
875'FSL, 1550'FEL, Sec.7, T-31-N, R	-9-W, NMPM		11.	Blanco Pict.Cliffs County and State San Juan Co, NM
12. CHECK APPROPRIATE BOX TO INDICATE Type of Submission	Type of A	ction		
X Notice of Intent A	bandonment ecompletion	Change New Cor Non-Rou	struc	tion
Subsequent Report P	Plugging Back Lasing Repair	Water S	Shut o	ff
Final Abandonment X O	Altering Casing Other - Tubing r	Convers	sion t	o Injection
13. Describe Proposed or Completed C	perations			
It is intended to repair the tub procedure and wellbore d	oing in the subjiagram.	ect well ad	ccordi	ng to the attached
		DEG		
		JAN 1	7 1397	· W
			765. 1811. S	
14. I hereby certify that the forego	oing is true and	correct.		
Signed Jeggy Bradhued (VGI	W5)Title Regulat	ory Admini	strate	or_Date 1/8/97
(This space for Federal or State Office APPROVED BY	ce use) _Title		ate	PPROVEL
CONDITION OF APPROVAL, if any:				JAN 1 0 1997

LOISTRICT MANAGER

WORKOVER PROCEDURE -- TUBING REPAIR

JOHNSTON FEDERAL #12 Blanco Pictured Cliffs Sec. 7, T31N, R09W San Juan Co., New Mexico DPNO: 13021S

- 1. Comply to all NMOCD, BLM, and BROG regulations. Conduct daily safety meetings for all personnel on location. Notify BROG Regulatory (Peggy Bradfield, 326-9727) and the appropriate Regulatory Agency prior to pumping any cement job. If an unplanned cement job is required, approval is required before the job can be pumped. If verbal approval is obtained, document the approval in Dims/Wims. As much time as possible to the pump time is needed to the Agency to be able to show up for the cement job.
- Install and test location rig anchors. Prepare blow pit. Comply to all NMOCD, BLM, and BROG safety regulations.
- 3. MOL and RU. Conduct safety meeting for all personnel on location. NU relief line. Blow down well and kill with 1% KCl water as necessary. ND wellhead and NU BOP. Test BOP.
- 4. TIH and tag bottom. Record depth. TOH with 2 3/8" tubing (113 jts.). Inspect tubing and replace all bad joints. (Note any buildup of scale, and notify Operations Engineer. If tubing is excessively scaled, acid wash may be run in perforations).
- 5. PU and RIH with 4 3/4" bit and 5 1/2" casing scraper to PBTD, 3682'. TOH and LD bit and scraper.
- 6. RIH open ended with tubing, SN one joint off bottom, (rabbit tubing in derrick before running in hole). CO with air. Land tubing @ bottom perforation, 3525'.
- 7. ND BOP, NU wellhead, rig down, move off location and restore location.

Recommended:

Approval:

Drilling Superintendent

CONTACTS: Operations Engineer Gaye White 326-9875

Johnston Federal #12

CURRENT -- 12/18/96

Blanco Pictured Cliffs DPNO 13021S


875' FSL, 1550' FEL,

Section 7, T-31-N, R-09-W, San Juan County, NM Longitude / Latitude: 36° 54.46656' -- 107° 49.01274'

Spud: 8-25-78 Completed: 9-16-78 Elevation: 6652 (GL) 6664' (KB)

Logs: Cased hole GR-Neutron, CBL

Workover(s): None

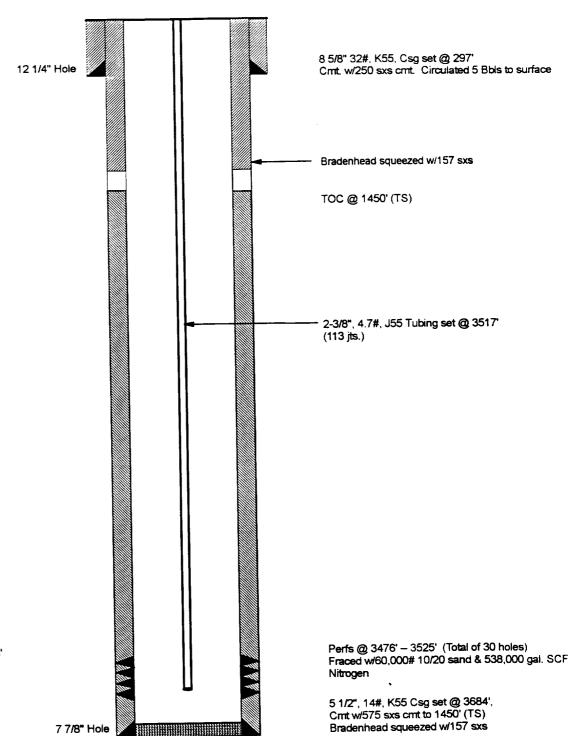

Fruitland @ 3390'

Pictured Cliffs @ 3468

PBTD 3682' TD 3700'

Bradenhead squeezed w/157 sxs

PIPELINE INTEREST CASING PRESSURES **PRODUCTION HISTORY EPNG** 75.00% GWI: 4.4 Bcf 603 psi Gas Cum: Initial SICP (9/78): 151 Mcf/d Current (10/96) NRI: 61.98% Current SICP (6/92): 423 psi 2.2 Mbo Oil Cum: SJBT: 0.00% 0 Bo/d **Current (10/96)**