

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

APPLICATION FOR PERMIT TO DRILL, DEEPEN, OR PLUG BACK

1a. TYPE OF WORK DRILL <input checked="" type="checkbox"/> DEEPEN <input type="checkbox"/> PLUG BACK <input type="checkbox"/>		5. LEASE DESIGNATION AND SERIAL NO. NM-012647
b. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER <input type="checkbox"/> SINGLE ZONE <input type="checkbox"/> MULTIPLE ZONE <input type="checkbox"/>		6. IF INDIAN, ALLOTTEE OR TRIBE NAME
2. NAME OF OPERATOR Tenneco Oil Company		7. UNIT AGREEMENT NAME
3. ADDRESS OF OPERATOR 720 S. Colorado Blvd., Denver, CO 80222		8. FARM OR LEASE NAME Riddle B
4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.*) At surface 1030' FSL, 805' FWL At proposed prod. zone		9. WELL NO. 1
14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE* 13 miles NE of Aztec, NM		10. FIELD AND POOL, OR WILDCAT Basin Dakota
10. DISTANCE FROM PROPOSED* LOCATION TO NEAREST PROPERTY OR LEASE LINE, FT. (Also to nearest drlg. unit line, if any)		11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA Sec. 22, T 31N, R 9W
16. NO. OF ACRES IN LEASE 640		12. COUNTY OR PARISH San Juan
17. NO. OF ACRES ASSIGNED TO THIS WELL 220 w/314.11		13. STATE NM
18. DISTANCE FROM PROPOSED LOCATION* TO NEAREST WELL, DRILLING, COMPLETED, OR APPLIED FOR, ON THIS LEASE, FT. 7,640		20. ROTARY OR CABLE TOOLS Rotary
21. ELEVATIONS (Show whether DF, RT, GR, etc.) 6260 G.R.		22. APPROX. DATE WORK WILL START* ASAP


23. PROPOSED CASING AND CEMENTING PROGRAM

SIZE OF HOLE	SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	QUANTITY OF CEMENT
13 3/4"	9 5/8"	36# K-55 new	300'	Circulate to surface
8 3/4"	7"	23# K-55 new	3,500'	Circulate to surface
6 1/4"	4 1/2"	10.5-11.6# new	7,640	Circulate through liner hanger

SEE ATTACHED

U. S. GEOLOGICAL SURVEY
FARMINGTON, N. M.

gas not allocated



IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: If proposal is to deepen or plug back, give data on present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer program, if any.

24. SIGNED J. D. Traywick TITLE Administration Supervisor DATE October 24, 1979

(This space for Federal or State office use)

PERMIT NO. _____ APPROVAL DATE _____

APPROVED BY _____ TITLE _____ DATE _____
CONDITIONS OF APPROVAL, IF ANY:

*See Instructions On Reverse Side

All distances must be from the outer boundaries of the Section.

Operator TENNECO OIL COMPANY		Lease RIDDLE "B"		Well No. 1
Unit Letter M	Section 22	Township 31N	Range 9W	County San Juan
Actual Footage Location of Well: 1030 feet from the South line and 805 feet from the West line				
Ground Level Elev. 6260	Producing Formation Dakota	Pool Basin Dakota	Dedicated Acreage: 320 3/4.11 Acres	

1. Outline the acreage dedicated to the subject well by colored pencil or hatchure marks on the plat below.
2. If more than one lease is dedicated to the well, outline each and identify the ownership thereof (both as to working interest and royalty).
3. If more than one lease of different ownership is dedicated to the well, have the interests of all owners been consolidated by communitization, unitization, force-pooling, etc?

☐ YES ☒ NO If answer is "yes," type of consolidation _____

If answer is "no," list the owners and tract descriptions which have actually been consolidated. (Use reverse side of this form if necessary.) _____

No allowable will be assigned to the well until all interests have been consolidated (by communitization, unitization, forced-pooling, or otherwise) or until a non-standard unit, eliminating such interests, has been approved by the Commission.

	<p align="center">CERTIFICATION</p> <p>I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief.</p> <p><i>J. D. Traywick</i> Name J. D. Traywick Position Administration Supervisor Company Tenneco Oil Company Date October 24, 1979</p>	
	<p>I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my knowledge and belief.</p> <p>Date Surveyed July 18, 1979 Registered Professional Engineer and/or Land Surveyor No. 3950 <i>Fred B. Kern Jr.</i> Certificate No. 3950</p>	

TENNECO OIL COMPANY

PROGNOSIS TO DRILL AND COMPLETE

DIVISION: Rocky Mountain

DATE: July 6, 1979

LEASE: Riddle B

WELL NO.: 1

LOCATION: 1030' FSL, 805' FWL
Section 22, Township 31N, Range 9W
San Juan County, New Mexico

FIELD: Basin Dakota

ESTIMATED ELEVATION: 6170'

ESTIMATED TOTAL DEPTH: 7,640'

PROJECTED HORIZON: Dakota

DRILLING, CASING AND CEMENT PROGRAM:

- (1) MIRURT.
- (2) Drill a 13 3/4" hole to 300'. Run 9 5/8", 36#, K-55, ST&C casing to T.D. and cement to surface. Use 2% CaCl₂ in cement.
- (3) Cut off casing and weld on casing head. Pressure test weld to 1000 psi. NUBOP's and manifold. Pressure test casing, BOP's and manifold to 1000 psi for 30 minutes.
- (4) Drill out shoe and reduce hole to 8 3/4". Drill 8 3/4" hole to 3500'+. Run 7", 23#, K-55, ST&C casing to T.D. and cement to surface.
- (5) Land casing in slips and cut off. Install drilling spool on casing head. Install rotating head, manifold and flare line. Pressure test blind rams, manifold and casing to 1000 psi for 15 minutes. Pick up drilling assembly and 3 1/2" drill pipe. Pressure test pipe rams to 1000 psi for 15 minutes.
- (6) Drill out of 7" with 6 1/4" bit using gas as circulating fluid. Drill a few feet of formation and then blow hole with gas until it is dusting. Drill to T.D.
- (7) Log the hole dry as directed by the wellsite geological engineer and gauge the natural flow from the Dakota.
- (8) If productive, run 4 1/2" casing to T.D. as per casing design. Cement in one stage. Bring cement through liner hanger.
- (9) If nonproductive, plug and abandon as per U.S.G.S. requirements.

DRILLING MUD PROGRAM:

0-300'	Spud mud
300-3500'	Low solids fresh water mud. No WL control.
3500+-T.D.	Gas

CORING AND TESTING PROGRAM:

No cores or tests. Gauge natural flow from the Dakota.

DEVIATION SURVEYS:

1. Survey surface hole at 100' intervals. Maximum allowable deviation at 250' is $\frac{1}{2}^{\circ}$.
2. FROM SURFACE TO TOTAL DEPTH DEVIATION SURVEYS MUST BE TAKEN EVERY 500' OR EACH TRIP WHICHEVER IS FIRST. This may entail running the TOTCO on wireline. Record each survey on the AAODC Drilling Report Sheet. Maximum allowable change in deviation is 1° per 100'.

SAMPLES:

As directed by wellsite geological engineer.

WELL SURVEYS:

GR/FDC/CNL caliper from T.D. to base of Mesaverde.
GR/SP/SN induction from T.D. to surface casing.

BOP:

From 300' to T.D. as per U.S.G.S. requirements.

PREVENTORS MUST BE CHECKED FOR OPERATION EVERY 24 HOURS, AND THE CHECK MUST BE RECORDED ON THE AAODC DRILLING REPORT SHEET.

ESTIMATED FORMATION TOPS - SURFACE - SAN JOSE

Ojo	1950'
Pictured Cliffs	3051'
Cliffhouse	4504'
Menefee	
Point Lookout	
Mancos	
Gallup	6545'
Greenhorn	
Dakota "A"	7367'
T.D.	7640'

RIDDLE B-11. Existing Roads

- A. Proposed Well Site Location: This site was surveyed and staked by a registered land surveyor & is located 1030' FSL, 805 FWL, Sec. 22, T 31N, R 9W, San Juan County, NM (See Exhibit I).
- B. Planned Access Route: Begins at intersection pump canyon & NM Hwy. 511. Proceed up Pump Canyon to Little Pump Canyon until Canyon Forks. Take Left fork & proceed North for 6 miles to location on the East.
- C. Access Road Labelled:
Color Code: Red - Improved Surface
Black - New Access Road
- D. Not applicable - the proposed well is a development well.
- E. The proposed well is a development well. See Exhibit II for existing roads within a one mile radius.
- F. Existing Road Maintenance or Improvement Plan:
The existing roads will require minimal maintenance.

2. Planned Access Roads

(All roads are existing roads.)

- A. Width:
The average width of the road is twenty feet.
- B. Maximum Grades: The max grade will be less than 10%.
- C. Turnouts:
There are no turnouts planned as sight distance is sufficient.
- D. Drainage Design:
The road is center crowned to allow drainage. The road is flat primarily.
- E. Culverts Use Major Cuts and Fills: No culverts or major cuts & fills will be required.
- F. Surfacing Material:
Native soil has been wetted, bladed and compacted to make the road surface, which is existing.

2. Planned Access Roads (Cont'd)

- G. Gates, Cattleguards, Fence Cuts:
No gates, cattleguards or fences will be needed.
- H. New Roads Centerlined Flagged:
Existing Roads.

3. Location of Existing Wells

The proposed well is a development well. Exhibit III shows existing wells within a one mile radius.

- A. Water Wells: None
- B. Abandoned Wells: None
- C. Temporarily Abandoned Wells: None
- D. Disposal Wells: None
- E. Drilling Wells: None
- F. Producing Wells: See Exhibit III
- G. Shut-In Wells: None
- H. Injection Wells: None
- I. Monitoring or Observation Wells: None.

4. Location of Existing and/or Proposed Facilities

- A. Existing facilities within one mile owned or controlled by Lessee/Operator:

- (1) Tank batteries - None
- (2) Production facilities - See Exhibit III
- (3) Oil Gathering Lines - None
- (4) Gas Gathering Lines - None
- (5) Injection Lines - None
- (6) Disposal Lines - None

- B. New facilities in the event of production:

- (1) New facilities will be within the dimensions of the drill pad.
- (2) See Exhibit IV
- (3) Construction Materials/Methods:
Construction materials will be native to the site.
Facilities will consist of a well pad.
- (4) Protection of Wildlife/Livestock: Facilities will be fenced as needed to protect wildlife/livestock.

4. Location of Existing and/or Proposed Facilities (Cont'd)

B. New facilities in the event of production: (cont'd)

(5) New facilities will consist of a well head, tank and production unit.

C. Rehabilitation of Disturbed Areas:

Following the completion of construction, those areas required for continued production will be graded to provide drainage and minimize erosion. Those areas unnecessary for use will be graded to blend with surrounding topography per BLM recommendations.

5. Location and Type of Water Supply

A. Location and type of water supply:
Water will be hauled from private source.

B. Water Transportation System:
Water trucks will be used.

C. Water wells:
N/A;

6. Source of Construction Materials

A. Materials:
Construction materials will consist of soil native to the site. Any topsoil, if present, will be stripped and stockpiled as needed.

B. Land Ownership;
The planned site and access road is on federal land administered by the Bureau of Land Management.

C. Materials Foreign to the Site:
N/A.

D. Access Roads:
No additional roads will be required.

7. Methods for Handling Waste Disposal

A. Cuttings:
Cuttings will be contained in the reserve pit.

B. Drilling Fluids:
Drilling fluids will be retained in the reserve pit.

C. Produced Fluids:
Produced fluids, including produced water will be collected in the reserve pit. Any small amount of hydrocarbon that may be produced during testing will be retained in the reserve pit. Prior to clean up operations, the hydrocarbon material will be skimmed.

7. Methods for Handling Waste Disposal (Cont'd)

- D. Sewage:
Sanitary facilities for sewage disposal will consist of at least one pit toilet, during the driller operations. The pit will be backfilled immediately following completion of the drilling operation.
- E. Garbage:
There probably will not be much putrescible garbage to dispose of. However, it will be disposed of along with the refuse in a constructed burn pit, which will be fenced. The small amount of refuse will be burned and the pit will be covered with a minimum 36 inch cover upon completion.
- F. Clean-Up of Well Site:
Upon the release of the drilling rig, the surface of the drilling pad will be prepared to accommodate a completion rig, if testing indicates potential productive zones. In either case, the "mouse hole" and "rat hole" will be covered to eliminate a potential hazard to livestock. The reserve pit will be fenced to prevent entry of livestock until the pit is backfilled. Reasonable clean up will be performed prior to final restoration of the site.

8. Ancillary Facilities

None required.

9. Well Site Layout

- A. See Exhibit IV
- B. Location of pits, etc. See Exhibit IV
- C. Rig orientation etc. See Exhibit IV
- D. Lining of pits:
Pits will not be lined. They will be covered with a fine mesh netting, if necessary, for the protection of wildlife if fluids are found to be toxic.

10. Plans for Restoration of Surface

- A. Reserve pit clean up:
The pit will be fenced prior to rig release and shall be maintained until clean up. Prior to backfilling any hydrocarbon material on the pit surface will be removed. The fluids and solids contained in the pit shall be backfilled with soil excavated from the site and with soil adjacent to the reserve pit. The restored surface of the reserve pit will be contoured as needed to minimize erosion. The reserve pit area will be seeded per BLM recommendations during the appropriate season following final restoration of the site.

10. Plans for Restoration of Surface (Cont'd)

- B. Restoration Plans - Production Developed:
The reserve pit will be backfilled and restored as described under Item A. In addition, those disturbed areas not required for production will be graded to blend with the surrounding topography, and seeded, per BLM recommendations. The portion of the drill pad required for production and turning areas will be graded to minimize erosion and provide access to production facilities under inclement conditions. Following depletion and abandonment of the site, restoration procedures will be those under Item C. below.
- C. Restoration Plan - No Production Developed:
The reserve pit will be restored as described above. With no production developed, the entire surface disturbed by construction of the drilling pad will be restored. The site will be contoured to blend with the surrounding topography. The site will be seeded according to BLM recommendations. If the new access road is not required for other development plans, it will be obliterated and restored and seeded per BLM recommendations.
- D. Rehabilitation Time Table:
Upon completion of operations the initial clean up of the well site will be performed. Final restoration of the site will be performed as soon as possible according to procedural guidelines published by the USGS and BLM. Seeding of the disturbed areas which are no longer required will be performed during the appropriate season, following final restoration.

11. Other Information

- A. Surface Description: The site is located on a mesa bench above Little Pump Canyon. The vegetation consists of Pinon, Juniper, Oak Bench, Mountain Mahogany, Bitter Bush and various grasses. The soil is sandy loam.
- B. Surface Use Activities:
The surface is federally owned and managed by the BLM. The predominant surface use is mineral exploration and production.
- C. Proximity of Water, Dwellings and Historical Sites:
 - 1. Water:
There are no reservoirs or streams in the immediate area.
 - 2. Occupied Dwellings:
There are no occupied dwellings or buildings in the area.
 - 3. Sites:
An archeological reconnaissance has been performed for this location and clearance has been granted.


12. Operator's Field Representative


Donald S. Barnes
Division Drilling Engineer
Tenneco Oil Company
720 South Colorado Blvd.
Penthouse
Denver, CO 80222
(303) 758-7130 Ext. 212

13. Certification


I hereby certify that I, or persons under my direct supervision, have inspected the proposed drill site and access route; that I am familiar with the conditions as they actually exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and that the proposed work performed by Tenneco Oil Company and its contractors and subcontractors will conform to this plan.

Date: October 24, 1979


J. D. Traywick
Administration Supervisor



Vicinity Map for EXHIBIT II
TENNECO OIL COMPANY #1 RIDDLE "B"
1030' FSL 805' FWL Sec 22-T31N-R9W
SAN JUAN COUNTY, NEW MEXICO

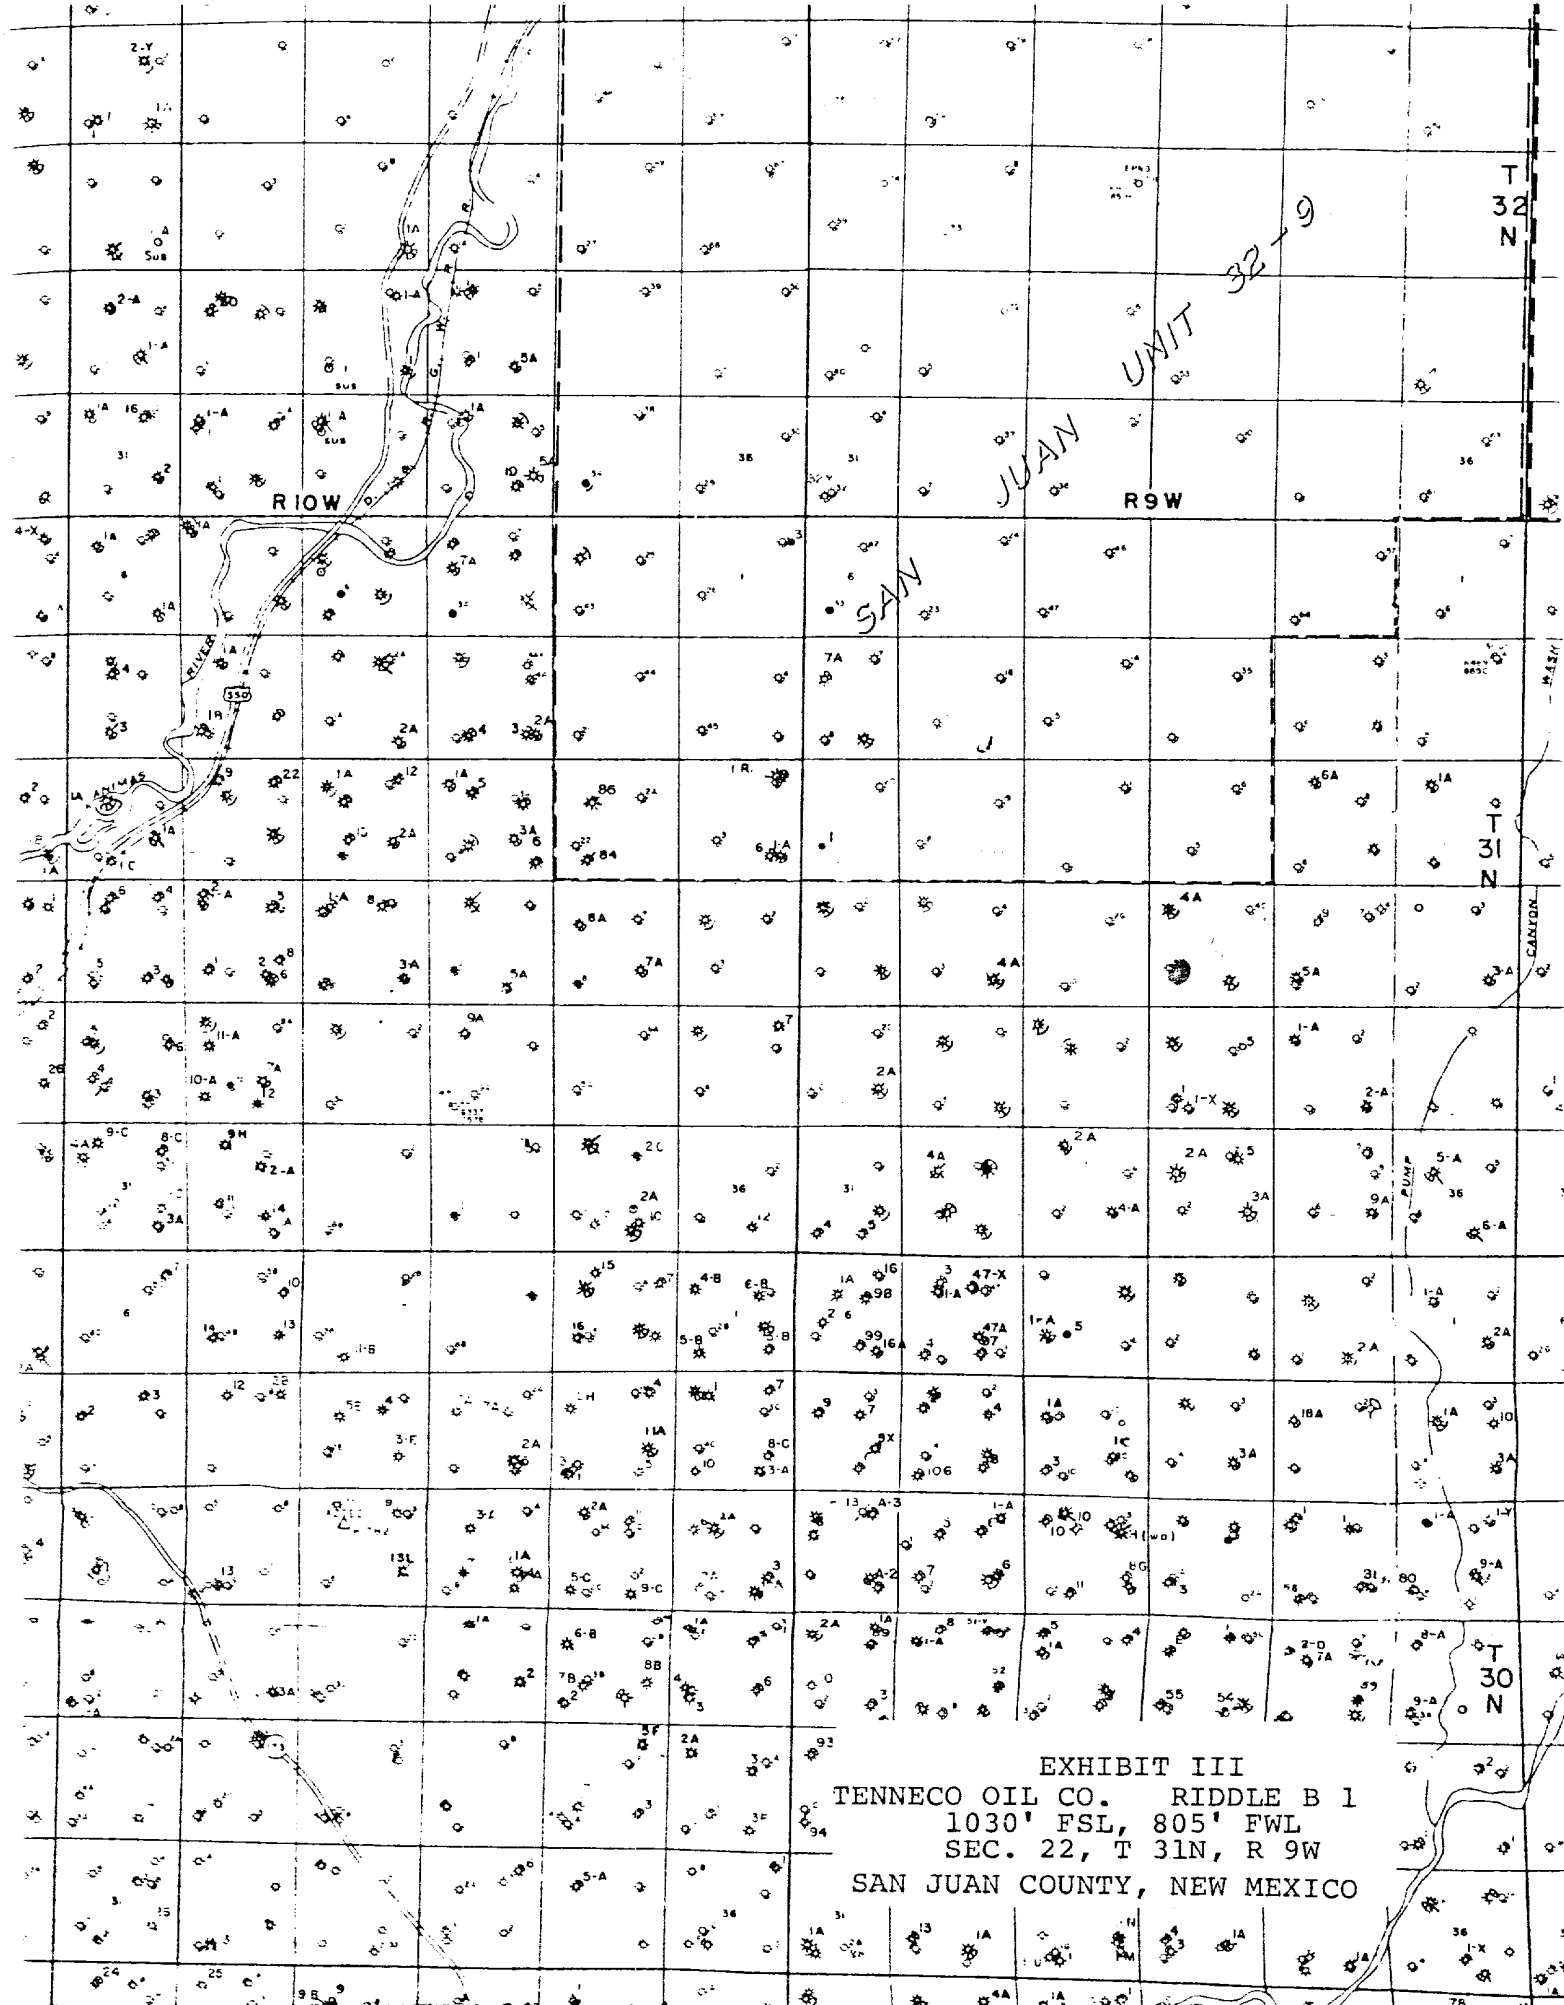

TENNECO OIL COMPANY


CALCULATION SHEET


EXHIBIT IV

SUBJECT DRILLING WELL SITE LAYOUT RIDDLE B-1
LOCATION 1030' FSL, 805' FWL, SEC. 22, T 31N, R 9W

DATE: 11-79

SAN JUAN COUNTY, NEW MEXICO

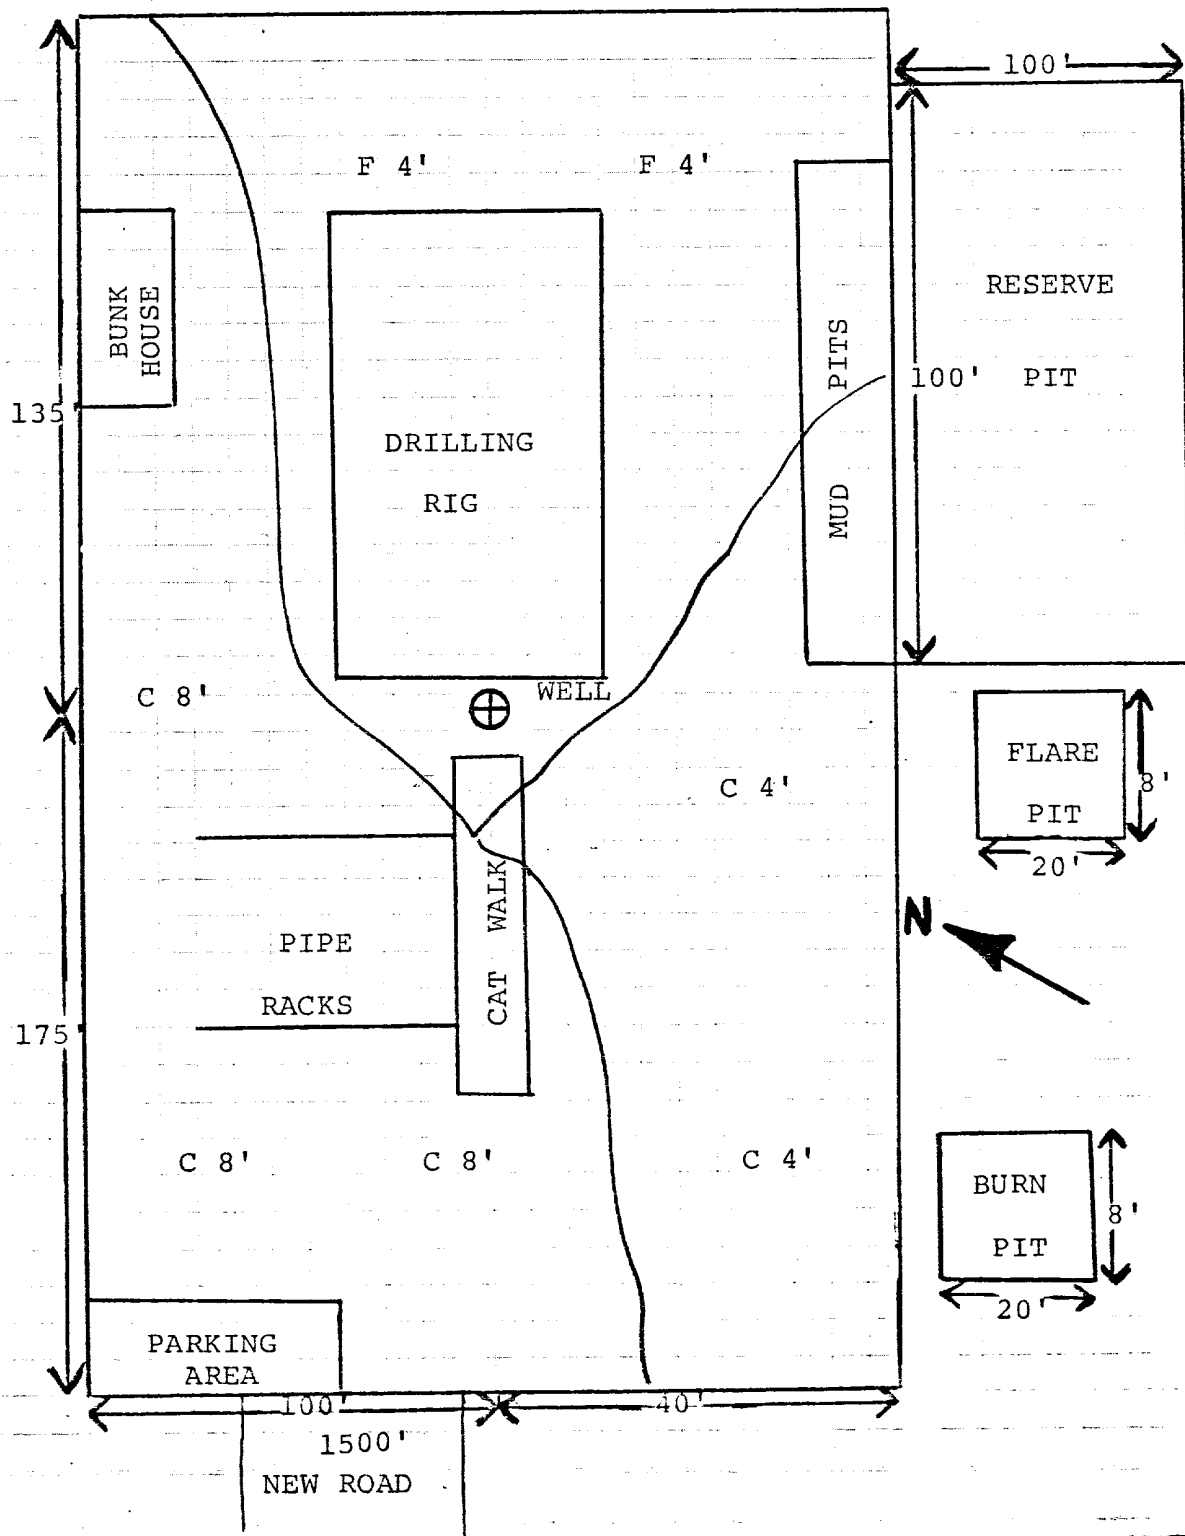

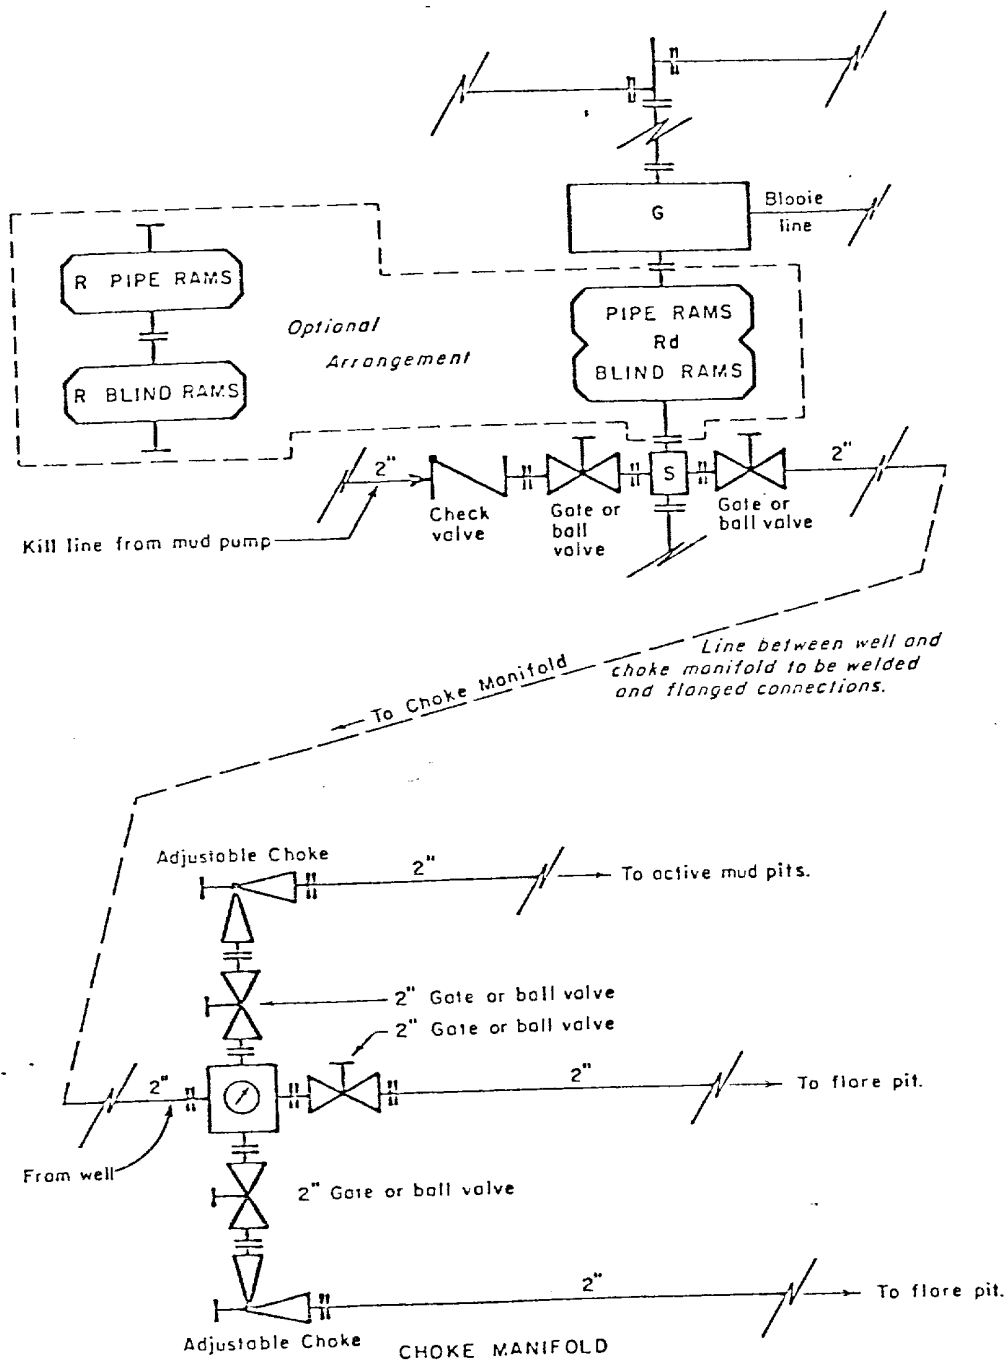

All equipment to be 3,000 psi working pressure except as noted.

- Rd Double ram type preventer with two sets of rams.
- R Single ram type preventer with one set of rams.
- S Drilling spool with side outlet connections for choke and kill lines.
- G Rotating head 150 psi working pressure minimum

ARRANGEMENT C

TENNECO OIL COMPANY
ROCKY MOUNTAIN DIVISION
REQUIRED MINIMUM
BLOWOUT PREVENTER AND
CHOKE MANIFOLD

J. MAGILL 10-26-79 EVI