#### SUBMIT IN TRIPLICATE\*

Form zpproved.
Budget Bureau No. 42-R1425.

(Other instructions on reverse side) UNITED STATES DEPARTMENT OF THE INTERIOR

30-095-24/42
5. LEASE DESIGNATION AND SERIAL NO.

GEOLOGICAL SURVEY					SF 078138		
APPLICATION FOR PERMIT TO DRILL, DEEPEN, OR PLUG BACK					6. IF INDIAN, ALLOTTEE OR TRIBE NAME		
	LL 🛎	DEEPEN [		PLUG BAC	K 🗌	7. UNIT AGREEMENT NA	ME
b. TYPE OF WELL  OIL WELL  OTHER  SINGLE ZONE  MULTIPLE ZONE						8. FARM OR LEASE NAM	E
2. NAME OF OPERATOR	atural Cac	Company				Morris A	
El Paso Natural Gas Company 3. ADDRESS OF OPERATOR						11	_
PO Box 289, Farmington, NM 87401					10. FIELD AND POOL, OF		
4. LOCATION OF WELL (Re			h any S	tate requirements.*)		1	ured Cliffs
At proposed prod. zone same					11. SEC., T., R., M., OR B SAND SURVEY OR ARI SEC. 29, T-3		
14. DISTANCE IN MILES A	southwest			•		12. COUNTY OR PARISH San Juan	13. STATE NM
15. DISTANCE FROM PROPO LOCATION TO NEAREST PROPERTY OR LEASE L (Also to nearest drig	SED*	330'	16. NO. OF ACRES IN LEASE 2000 170 19. PROPOSED DEPTH 20. ROT			THIS WELL 158.98  TARY OR CABLE TOOLS  ATY	
18. DISTANCE FROM PROPE TO NEAREST WELL, DI OR APPLIED FOR, ON THI	OSED LOCATION* RILLING, COMPLETED,	800'			20. ROTA Rota		
21. ELEVATIONS (Show when 5840 GL	ether DF, RT, GR, etc.)				<u> </u>	22. APPROX. DATE WOL	RK WILL START*
23.		PROPOSED CASI	NG AND	CEMENTING PROGRA	M		
SIZE OF HOLE	SIZE OF CASING	WEIGHT PER F	оот	SETTING DEPTH		QUANTITY OF CEMEN	
12 1/4"	8 5/8"	24.0#		120'	1	106 cu.ft.circ. to surface 659 cu.ft.to cover Ojo Alam	
6 3/4"	2 7/8"	6.4#		2315'	639	Cu.it.to Cov	er Ojo Aramo
A 3000 ps blind and	i WP and 60 pipe rams	000 psi tes will be us	t do	uble gate pr	event preve	er equipped ntion on thi	with s well.
	is dedicate		cate	d to this we	.11	RECEIV  DEC 1 2 197  U. S. GEOLOGICAL SL FARMINGTON N	ED   '9
IN ABOVE SPACE DESCRIBE zone. If proposal is to preventer program, if an	r PROPOSED PROGRAM : drill or deepen direct	If proposal is to dee	pen or p	olug back, give data on p	resent pro	ductive zone and propose	new productive
24.	1. Busco	<b>1</b> TI	TLE	Drilling	Clerk	DATE 12-1	2-79
(This space for Fede	eral or State office use	)				1000	
PERMIT NO.				APPROVAL DATE			
APPROVED BY					COM.		
oh 5r	~h			0.5.0.1		OIL DIS	7. 1



\*See Instructions On Reverse Side

#### STATE OF NEW MEXICO ENERGY AND MINERALS DEPARTMENT

# OIL CONSERVATION DIVISION P. O. BOX 2088 SANTA FE, NEW MEXICO 87501

Form C-102 Revised 10-1-78

All distances must be from the cuter handaries of the Secretary

operator			<del></del>	<del>                                     </del>	ef the Section		
	ATURAL GAS	COMPANY		MORRIS "A"	(SF	`-078138)	Well No.
Init Letter	Section	Township		Range	County		11
J	29	30N		11W	San	Juan	
ctual Footage Loc							
1650 Fround Level Elev.	feet from the		line and		feet from the	East	line
5840		Formation ICTURED CLI	FFS	AZTEC PI	CTURED CLI	FFS Ded	licated Acreage:
1. Outline th	e acreage ded	licated to the	subject we	ell by colored pend	il or hachure	marks on the p	Acre
2. If more the interest ar	nan one lease nd royalty).	is dedicated	to the well	, outline each and	identify the	ownership there	of (both as to workin
Yes  If answer i	No I is "no;" list the finecessary.)	If answer is ";	yes," type of	consolidation	e actually be	en consolidated	owners been consoli
No allowab forced-pool sion.	le will be assi	igned to the w se) or until a r	ell until all 10n-standard	interests have been unit, eliminating	n consolidat such interest	ed (by communis, has been app	tization, unitization roved by the Commis
	1			1		CE	RTIFICATION
	 			CEIYED C 1 2 979		tained herein is	that the information con- strue and complete to the viedge and belief.
	-+		+	EOLOGICAL SURVEY MINGTON, N. M.		Name Drilling Position	Clerk
	1					Company December	12, 1979
	1	Sec.	^^~~~	20	1917		
	<del></del>	- Right			$\times \times $		
			29 SF-0783	138 F1		shown on this p notes of actual under my superv is true and co	y that the well location lat was plotted from field surveys made by me or rision, and that the same trect to the best of my
	- +		-	138 FI	EE .	shown on this p notes of actual under my superv	lat was plotted from field surveys made by me or rision, and that the same rect to the best of my belief.
	- +		SF-0783	138 F1	EE .	shown on this p notes of actual under my superv is true and co knowledge and b  Date Surveyed Septembers Registered Profess	lat was plotted from field surveys made by me or sisten, and that the same rect to the best of my belief.



P. O. BOX 990 FARMINGTON, NEW MEXICO 87401

PHONE: 505-325-2841

Company of the Marian and Marian and American property of the company of the comp

### Multi-Point Surface Use Plan Morris A #11

- 1. Existing Road Please refer to Map No. 1 which shows the existing roads. New roads which will be required have been marked on this map. All existing and new roads will be properly maintained during the duration of this project.
- 2. Planned Access Roads Please refer to Map No. 1. The grade of the access roads will be consistent with that of the local terrain. The road surface will not exceed twenty feet (20') in width. Upon completion of the project, the access road will be adequately drained to control soil erosion. Drainage facilities may include ditches, water bars, culverts or any other measure deemed necessary by trained Company personnel to insure proper drainage. Gates and/or cattleguards will be installed if necessary.
- 3. Location of Existing Wells Please refer to Map No. 2.
- 4. Location of Tank Batteries, Production Facilities, and Production Gathering and Service Lines Please refer to Maps No. 1 and No. 2.

  Map No. 2 shows the existing gas gathering lines. Map No. 1 shows the existing roads and new proposed access roads. All known production facilities are shown on these two maps.
- 5. Location and Type of Water Supply Water for the proposed project will be obtained from Animas River.
- 6. Source of Construction Materials No additional materials will be required to build either the access road or the proposed location.
- 7. Methods of Handling Waste Materials All garbage and trash materials will be put into a burn pit shown on the attached Location Plat No. 1. When clean-up operations are begun on the proposed project, the burn pit with its refuse will be buried to a depth of at least three feet (3'). A latrine, the location of which is also shown on Plat No. 1,

7. cont'd.

- will be provided for human waste. If large amounts of liquids are left in the reserve pit after completion of the project, the pit will be fenced until the liquids have had adequate time to dry. The location clean-up will not take place until such time as the reserve pit can be properly covered over to prevent run-off from carrying any of these materials into the watershed. No earthen pit will be located on natural drainages; all earthen pits will be so constructed as to prevent leakage from occurring.
- 8. Ancillary Facilities No camps or airstrips will be associated with this project.
- 9. Wellsite Layout Please refer to the attached Plat No. 1.
- 10. Plans for Restoration of the Surface After completion of the proposed project, the location will be cleaned and leveled. The location will be left in such a condition that will enable reseeding operations to be carried out. Seed mixture as designated by the responsible government agency will be used. The reseeding operation will be performed during the time period set forth by the regulatory body. The location production equipment will be painted as designated by the responsible government agency.
- 11. Other Information The terrain is rolling hills with pinon, juniper, and biller brush growing. Cattle and deer are occasionally seen on the proposed project site.
- 12. Operator's Representative W.D. Dawson, PO Box 990, Farmington, NM
- 13. Certification -

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drillsite and access route; that I am familiar with the conditions which presently exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed by El Paso Natural Gas Company and its contractors and sub-contractors in conformity with this plan and the terms and conditions under which it is approved.

L. A. Aimes

Project Drilling Engineer

### EIPEED NATURAL GAS

P.O. ROSCOPO FARMUNCH COLFIE COME OF ACTION PHONE SAME COMPAN

Well Name Morris A #11	•
Location <u>SE29</u> 30-11	
Formation PC	
	•
We, the undersigned, have inspected this location	and road
	and roud.
U. S. Forest Service	Date .
Archaeologist (	and the state of
Archaeologist :	Date
Bureau of Indian Affairs Representative	Date
By Mul	10/4/29
Bureau of Land Management Representative	Date
U. S. Geological Survey Representative - AGREES	10/4/79
TO THE FOOTAGE LOCATION OF THIS WELL.	Date
REASON:	
Seed Mixture:	
Equipment Color:	
Road and Row: (Same) or (Separate)	
Remarks:	

C.C. to Dave Vilvin

Earl Mealer
John Ahlm

#### Operations Plan - Morris A #11

I. Location: 1650'S, 1805'E, Section 29, T-30-N, R-11-W, San Juan County, NM

Field: Aztec Pictured Cliffs Elevation: 5840'GL

#### II. Geology:

A. Surface Formation: Nacimiento

Sub-surface Formation Tops:

Ojo Alamo	695 <b>'</b>	Pictured Cliffs	2115'
Kirtland	835 <b>'</b>	Lewis	2275
Fruitland	1795'	Total Depth	2315'

B. Logging Program: Induction Electric and Gamma Ray Density at TD.

C. Coring: none

D. Testing: none

#### III. Drilling:

A. Anticipated Starting Date and Duration of the Project:

1980 Drilling Program - approximately 4 days to complete.

B. Circulating Medium: Treated water and a low solids gel base mud will be used from surface to TD.

#### IV. Materials:

A. Casing Program:	Hole Size	Depth	Csg.Size	Wt.&Grade
	12 1/4" 7 7/8"	120'	8 5/8"	24.0# J-55
	6 3/4"	1915' 2315'	2 7/8" 2 7/8"	6.4# J-55 6.4# J-55

B. Float Equipment: 8 5/8" surface casing - cement guide shoe.

2 7/8" production casing - 10' shoe joint with notched collar for guide shoe and 2 7/8" latch down baffle on top. Two 3 1/16" balls and one 2 7/8" latch down plug.


C. Tubing: none

D. Wellhead Equipment: 8 5/8" x 2 7/8" 2000 psi WOG casing head.

#### V. Cementing:


8 5/8" surface casing - 90 sks. of Class "B" cement with 1/4# gel-flake per sack and 3% calcium chloride (106 cu.ft. of slurry, 100% excess to circulate to surface). WOC 12 hrs. Test casing wellhead and BOP to 600#/30 minutes.

2 7/8" production - precede cement with 5 bbls. water. Cement with 356 sks. of 65/35 Class "B" Poz with 6% gel and 8.3 gallons water per sack followed by 65 sks. 50/50 Class "B" Poz with 2% gel (659cu.ft. of slurry, 50% excess to cover Ojo Alamo). Spot 50 gallons of 7 1/2% acetic acid on top of plugs. Run temperature survey after 12 hours.

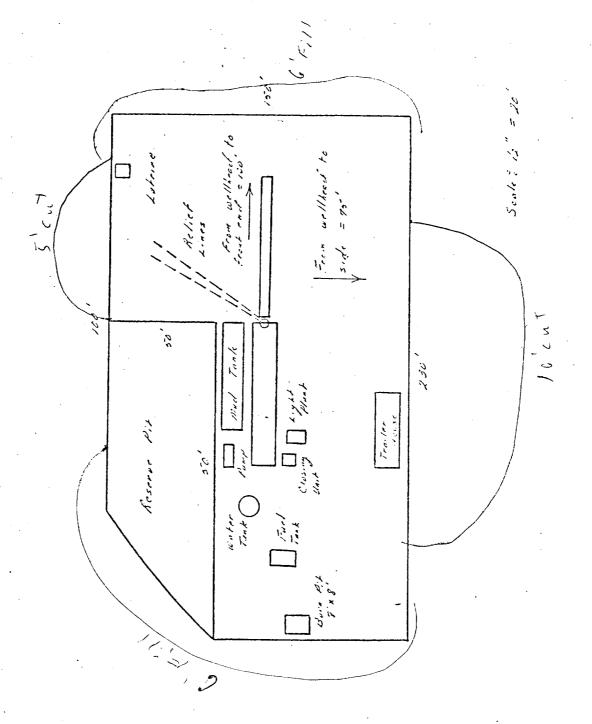


1


## Typical Mud brilled B.O.P. Installation for Pictured Cliffs Well

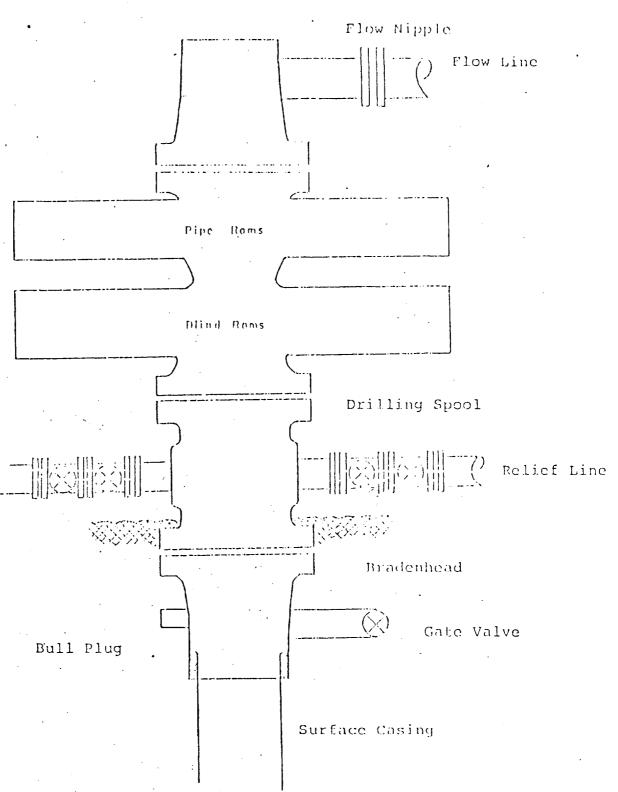

8" Series 900 Double Gate BOP, rated at 3000 psi Working Pressure

H

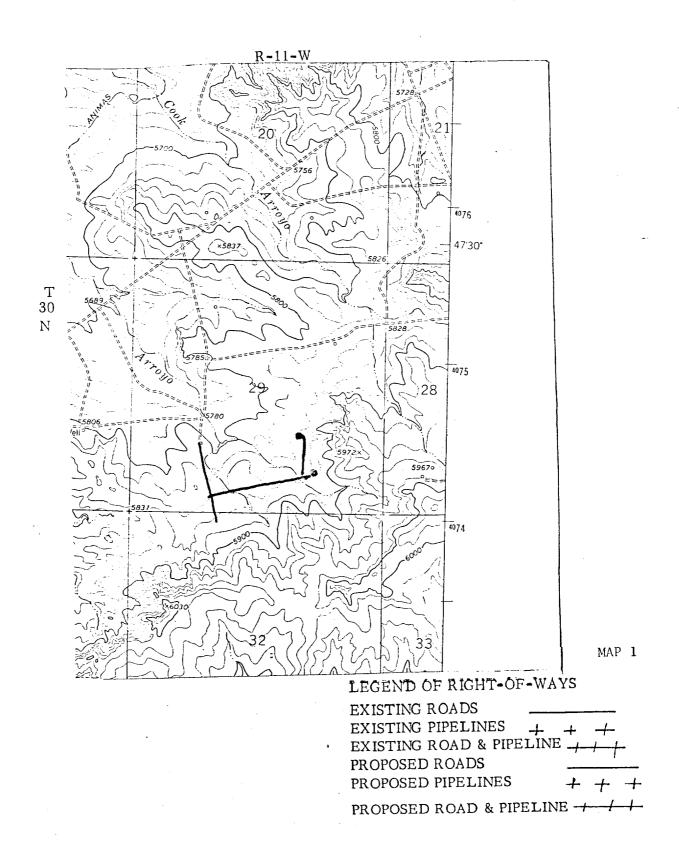

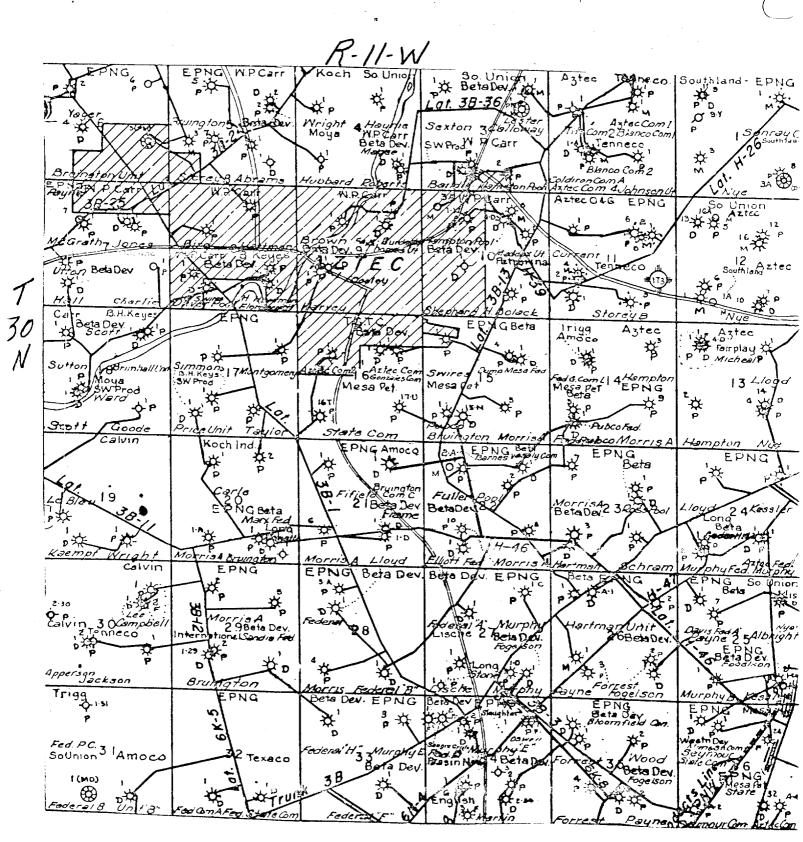

MAP 2