

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil well ☐ gas well ☒ other ☐

2. NAME OF OPERATOR
Blackwood & Nichols Co., Ltd.

3. ADDRESS OF OPERATOR
P. O. Box 1237, Durango, Colorado 81301

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 790' F/SL - 1190' F/WL
AT TOP PROD. INTERVAL: Same
AT TOTAL DEPTH: Same

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

5. LEASE
NM 03358

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME NEBU Agreement
No. 1, Sec. 929

8. FARM OR LEASE NAME
Northeast Blanco Unit

9. WELL NO.
206

10. FIELD OR WILDCAT NAME
South Los Pinos-Fruitland-PC

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA
M-10-31N-7W

12. COUNTY OR PARISH San Juan 13. STATE
New Mexico


14. API NO.

15. ELEVATIONS (SHOW DF, KDB, AND WD)
6637' KB

REQUEST FOR APPROVAL TO:

- TEST WATER SHUT-OFF ☐
FRACTURE TREAT ☐
SHOOT OR ACIDIZE ☐
REPAIR WELL ☐
PULL OR ALTER CASING ☐
MULTIPLE COMPLETE ☐
CHANGE ZONES ☐
ABANDON* ☐

SUBSEQUENT REPORT OF:

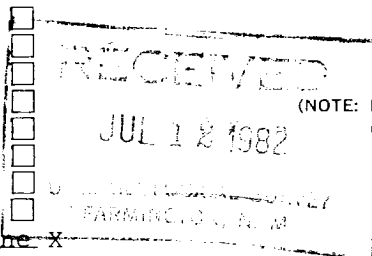

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

(other) Temporarily abandon PC zone X

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

On 5-19-82 foam fractured Pictured Cliffs zone under Model 415-D packer and 2 3/8" tubing through perforations. 4 holes/foot per interval at 3572', 3580', 3584', 3608' (16 holes).

After testing zone through 5-21-82, it was decided to temporarily abandon the PC zone. On 5-22-82 a bridge plug was set at 3505'. 4 1/2" csg. was perforated with 2 - 1/2" holes at 3462' in an effort to squeeze cement the coal section between the Fruitland and Pictured Cliffs zones. Could not pump through two holes with 1800 PSI. A 4 1/2" bridge was set at 3450'. The Fruitland zone was perforated 4 holes/foot/interval: 3414', 3422' and 3432' (12 holes) and sand-water gel fractured. On 5-23-82 reran 113 jts. 2 3/8" 4.7# J-55 EUE tubing 3392', landed at 3410'. Encountered 35' 20-40 sand fillup on bridge plug at 3450'. In the future we anticipate making another effort at recompleting the Pictured Cliffs zone and comingle both or submit a Form 9-331 requesting permission to permanently abandon

Subsurface Safety Valve: Manu. and Type _____ Set @ _____ Ft.

one or both zones.

18. I hereby certify that the foregoing is true and correct

SIGNED DeLasso Loos TITLE District Manager DATE July 9, 1982
DeLasso Loos

(This space for Federal or State office use)

APPROVED BY
CONDITIONS OF APPROVAL

APPROVED

JUL 16 1982
JAMES F. SIMS
DISTRICT ENGINEER

TITLE

DATE

*See Instructions on Reverse Side

NMOCC