

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil well ☐ gas well ☒ other

2. NAME OF OPERATOR
Southland Royalty Company

3. ADDRESS OF OPERATOR

P.O. Drawer 570, Farmington, New Mexico 87401

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)

AT SURFACE: 980' FSL & 700' FEL

AT TOP PROD. INTERVAL:


AT TOTAL DEPTH:

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

TEST WATER SHUT-OFF ☐
FRACTURE TREAT ☐
SHOOT OR ACIDIZE ☐
REPAIR WELL ☐
PULL OR ALTER CASING ☐
MULTIPLE COMPLETE ☐
CHANGE ZONES ☐
ABANDON* ☐
(other) Casing Report ☒

SUBSEQUENT REPORT OF:

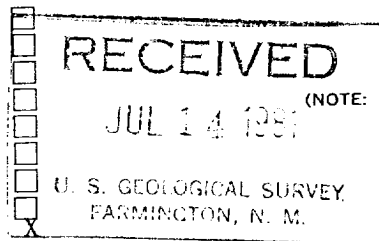

5. LEASE

NM-13959

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

Holly Federal

9. WELL NO.

1

10. FIELD OR WILDCAT NAME

Wildcat

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA

Section 29, T30N, R15W

12. COUNTY OR PARISH

San Juan

13. STATE

New Mexico

14. API NO.

15. ELEVATIONS (SHOW DF, KDB, AND WD)

5170' GR



(NOTE: Report results of multiple completion or change on Form 9-330)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

7-11-81 Drilled 7-7/8" hole to total depth of 4350'. Ran 103 joints (4338.44') of 5-1/2", 15.5#, K-55 casing set at 4350'. DV tool set at 2910.49'. Cemented 1st stage with 65 sacks of Class "B" 50/50 poz with 6% gel and 1/4# gel flake per sack, followed by 50 sacks Class "B" Neat with 2% CaCl₂. Plug down at 4:15 A.M. 7-11-81.

7-12-81 Cemented 2nd stage with 300 sacks of Class "B" 50/50 poz with 6% gel and 1/4# gel flake per sack, followed by 50 sacks of Class "B" with 2% CaCl₂. Plug down at 10:00 A.M. 7-12-81. Top of cement at 1600'.

Subsurface Safety Valve: Manu. and Type _____ Set @ _____ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED Robert S. [Signature] TITLE Drilling Clerk DATE July 13, 1981

(This space for Federal or State office use)

APPROVED BY _____
CONDITIONS OF APPROVAL, IF ANY:

TITLE

DATE

FOR RECORD

NMOCC

JUL 15 1981

Dean Elliott