

submitted in lieu of Form 3160-5

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

Sundry Notices and Reports on Wells

1. Type of Well GAS	5. Lease Number SF 078125
2. Name of Operator BURLINGTON RESOURCES	6. If Indian, All. or Tribe Name
3. Address & Phone No. of Operator PO Box 4289, Farmington, NM 87499 (505) 326-9700	7. Unit Agreement Name
4. Location of Well, Footage, Sec., T, R, M 1455' FNL, 1585' FEL, Sec. 10, T-30-N, R-10-W	8. Well Name & Number Sunray A Com #205
	9. API Well No. 30-045-27005
	10. Field and Pool Basin Fruitland Coal
	11. County and State San Juan Co., NM

12. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OTHER DATA

Type of Submission

Type of Action

<input checked="" type="checkbox"/> Notice of Intent	<input checked="" type="checkbox"/> Abandonment	<input type="checkbox"/> Change of Plans
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Recompletion	<input type="checkbox"/> New Construction
<input type="checkbox"/> Final Abandonment	<input type="checkbox"/> Plugging Back	<input type="checkbox"/> Non-Routine Fracturing
	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> Water Shut off
	<input type="checkbox"/> Altering Casing	<input type="checkbox"/> Conversion to Injection
	<input type="checkbox"/> Other -	

13. Describe Proposed or Completed Operations

It is intended to plug and abandon the subject well according to the attached procedure and wellbore diagram.

14. I hereby certify that the foregoing is true and correct.

Signed [Signature] (MEL5) Title Regulatory Admin. Date 1/13/98

(This space for Federal or State Office use)

APPROVED BY _____ Title _____ Date _____

CONDITION OF APPROVAL, if any:

NMOC

PLUG & ABANDONMENT PROCEDURE

11-3-97

Sunray A Com #205
Basin Fruitland Coal
1455' FNL & 1585' FEL / NE, Section 10, T-30-N, R-10-W
San Juan Co., New Mexico

Note: All cement volumes use 100% excess outside pipe. The stabilizing wellbore fluid will be 8.3 ppg, sufficient to balance all exposed formation pressures.

1. Install and/or test rig anchors. Prepare blow pit. Comply with all NMOC, BLM and Burlington safety rules and regulations.
2. MOL and RU daylight pulling unit. Blow well down; kill with water if necessary. ND wellhead and NU BOP and stripping head; test BOP.
3. POH and tally 2-3/8" tubing (3124'). Inspect tubing; if necessary LD and PU tubing workstring. Round-trip 7" gauge ring or casing scraper to 2879'.
4. **Plug #1 (Fruitland Coal perforations and top, 2879' - 2712')**: Set 7" wireline CIBP at 2879'. TIH with open-ended tubing and tag bridge plug. Load casing with water and circulate clean. Pressure test casing to 500#. If casing does not test, then spot and tag subsequent plugs as appropriate. Mix 42 sxs. Class B cement and spot a balanced plug inside casing above the CIBP to isolate Fruitland. POH to 1978'.
5. **Plug #2 (Kirtland and Ojo Alamo tops, 1978' - 1767')**: Mix 50 sxs. Class B cement and spot balanced plug inside casing to cover Ojo Alamo top. POH and LD tubing.
6. **Plug #3 (9-5/8" Surface Casing)**: Perforate 2 squeeze holes at 281'. Establish circulation out bradenhead valve. Mix and pump approximately 94 sxs. Class B cement down 7" casing, circulate good cement out bradenhead valve. Shut in well and WOC.
7. ND BOP and cut off casing below surface. Install P&A marker with cement to comply with regulations. RD, move off location, cut off anchors and restore location.

Recommended:

M E Luten
Operations Engineer

Approval:

W J L K
Drilling Superintendent

Proposed P&A

DPNO 3276A

Basin Fruitland Coal

N E, Section 10, T-30-N, R-10-W, San Juan County, NM

Today's Date: 11/3/97


Spud: 8/20/88

Completed: 8/30/88

Elevation: 6488' (GL)

Logs: Temp Survey

Workover: None

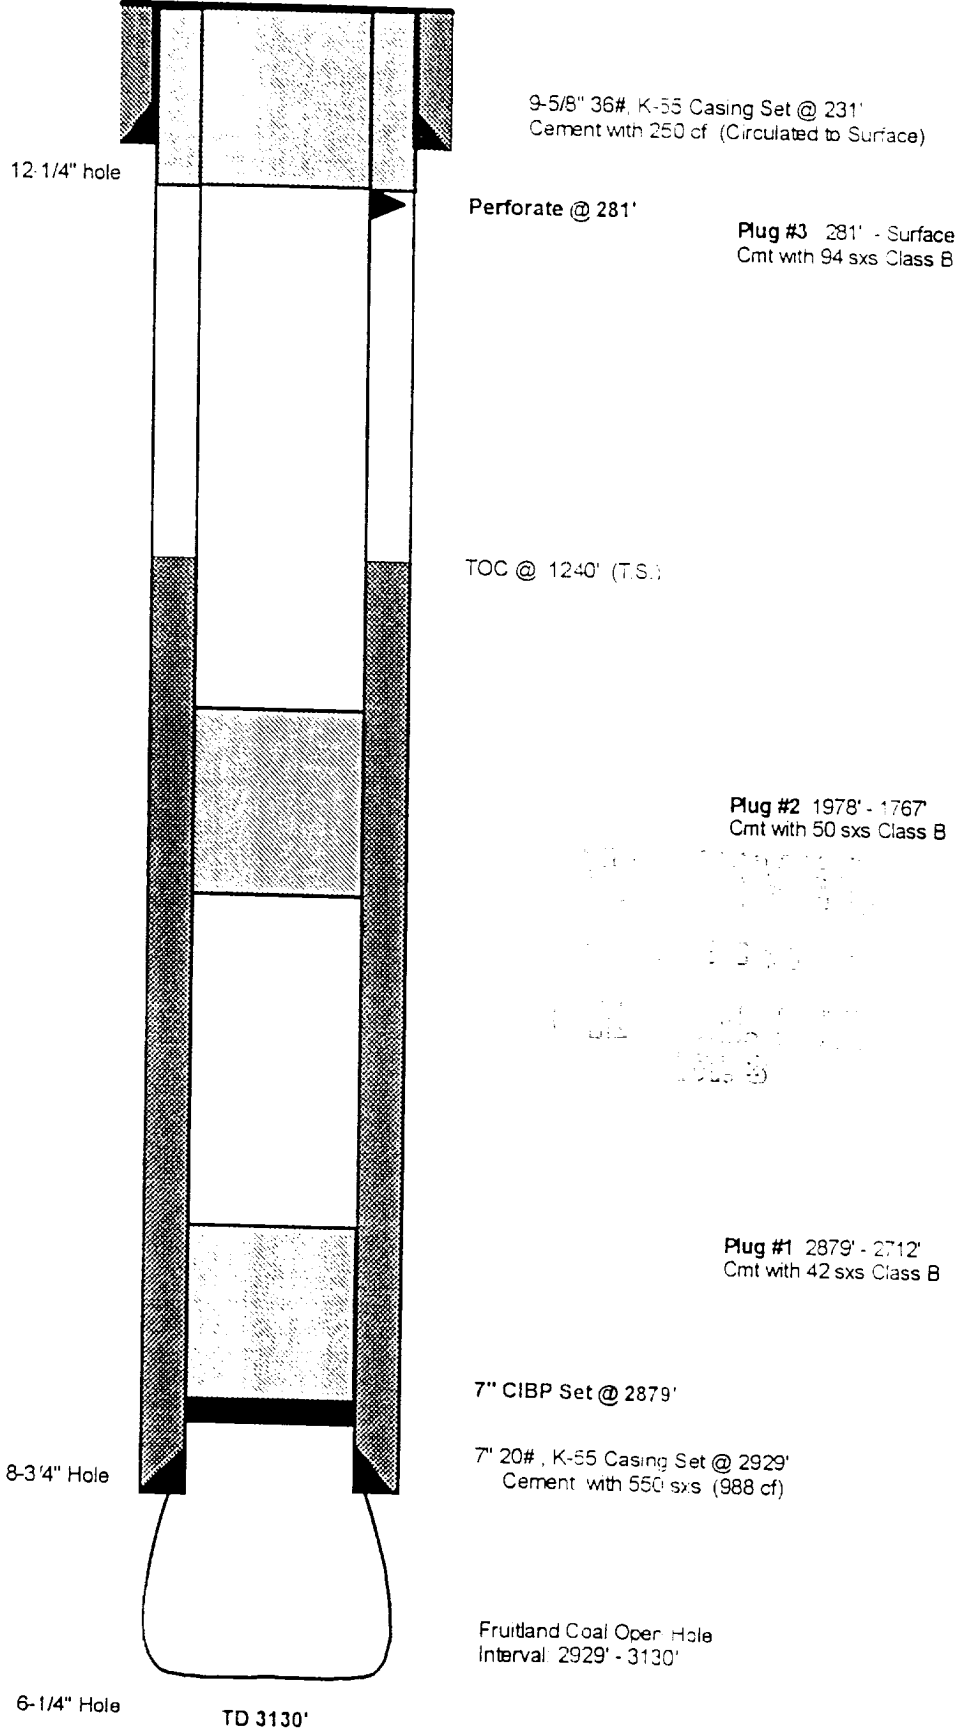

Current

DPNO 3276A

Basin Fruitland Coal

N E, Section 10, T-30-N, R-10-W, San Juan County, NM

Today's Date: 11/3/97

Spud: 8/20/88

Completed: 8/30/88

Elevation: 6488' (GL)

Logs: Temp. Survey

Workover: None

