



STATE OF NEW MEXICO
ENERGY, MINERALS AND NATURAL RESOURCES DEPARTMENT
OIL CONSERVATION DIVISION

RECEIVED
MAR 21 1989
OIL CON. DIV
DIST. 3

ORDER NO. SWD-363

GARREY CARRUTHERS
GOVERNOR

POST OFFICE BOX 2088
STATE LAND OFFICE BUILDING
SANTA FE, NEW MEXICO 87504
(505) 827-5800

APPLICATION OF UNION TEXAS PETROLEUM CORPORATION

ADMINISTRATIVE ORDER
OF THE OIL CONSERVATION DIVISION

Under the provisions of Rule 701(B), Union Texas Petroleum Corporation made application to the New Mexico Oil Conservation Division on February 13, 1989, for permission to complete for salt water ~~its~~ Pump Canyon SWD Well No. 1, located in Unit A, of Section 25, Township 31 North, Range 9 West, NMPM, San Juan County, New Mexico.

THE DIVISION DIRECTOR FINDS THAT:

(1) The application has been duly filed under the provisions of Rule 701(B) of the Division Rules and Regulations.

(2) Satisfactory information has been provided that all offset operators and surface owners have been duly notified; and

(3) The applicant has presented satisfactory evidence that all requirements prescribed in Rule 701 will be met.

(4) No objections have been received within the waiting period prescribed by said rule.

IT IS THEREFORE ORDERED THAT:

(1) The applicant herein, Union Texas Petroleum Corporation is hereby authorized to complete its Pump Canyon SWD Well No. 1 located in Unit A of Section 25, Township 31 North, Range 9 West, NMPM, San Juan County, New Mexico, in such a manner as to permit the injection of salt water for disposal purposes into the Morrison & Entrada formations at approximately 7515 feet to approximately 8600 feet through 2 7/8-inch plastic lined tubing set in a packer located at approximately 7415 feet.

IT IS FURTHER ORDERED THAT:

The operator shall take all steps necessary to ensure that the injected water enters only the proposed injection interval and is not permitted to escape to other formations or onto the surface.

Prior to commencing injection operations into the well, the casing shall be pressure tested from the surface to the packer setting depth to assure the integrity of said casing.

Administrative Order SWD-363
Union Texas Petroleum Corporation
March 16, 1989
Page 2

The casing-tubing annulus shall be loaded with an inert fluid and equipped with a pressure gauge at the surface or left open to the atmosphere to facilitate detection of leakage in the casing, tubing or packer.

Prior to commencing injection operations, the applicant shall obtain a water sample from the Morrison and Entrada formations and shall have said samples analyzed with the results to be sent to the Santa Fe office of the Division. The applicant shall further furnish a representative water analysis from the Basin Fruitland Coal (Gas) Pool and shall conduct compatibility test as may be necessary.

The injection well or system shall be equipped with a pressure limiting device which will limit the wellhead pressure on the injection well to no more than 1503 psi.

The Director of the Division may authorize an increase in injection pressure upon a proper showing by the operator of said well that such higher pressure will not result in migration of the injected fluid from the Morrison and Entrada formations. Such proper showing shall consist of a valid step-rate test run in accordance with and acceptable to this office.

The operator shall notify the supervisor of the Aztec district office of the Division of the date and time of the installation of disposal equipment and of the mechanical integrity test so that the same may be inspected and witnessed.

The operator shall immediately notify the supervisor of the Aztec district office of the Division of the failure of the tubing, casing or packer in said well and shall take such steps as may be timely and necessary to correct such failure or leakage.

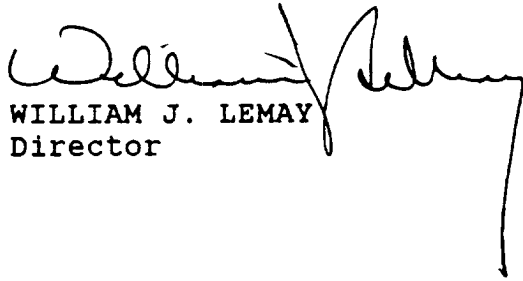
PROVIDED FURTHER THAT, jurisdiction of this cause is hereby retained by the Division for such further order or orders as any deem necessary or convenient for the prevention of waste and/or protection of correlative rights; upon failure of the operator to conduct operations in a manner which will ensure the protection of fresh water or in a manner inconsistent with the requirements set forth in this order, the Division may, after notice and hearing, terminate the injection authority granted herein.

The operator shall submit monthly reports of the disposal operations in accordance with Rule 706 and 1120 of the Division Rules and Regulations.

Administrative Order SWD-363
Union Texas Petroleum Corporation
March 16, 1989
Page 3

Approved at Santa Fe, New Mexico, on this 16th day of March,
1989.

STATE OF NEW MEXICO
OIL CONSERVATION DIVISION


WILLIAM J. LEMAY
Director

S E A L

RECEIVED
MAR 21 1989
OIL CON. DIV
DIST. 8