UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT

	ices and Reports on Well	LS	
		5.	Lease Number SF-078508-A
. Type of Well GAS		6.	If Indian, All. or Tribe Name
		\$15 16 17 18 20 7.	Unit Agreement Nam
. Name of Operator			
BURLINGTON	101	FEB 2000	
RESOURCES OIL	c Cla COMPANY	ECEIVED S	Well Name & Number
. Address & Phone No. of Operat	tor C	LCON. DIV	Nordhaus #716
PO Box 4289, Farmington, NM		DIST. S	API Well No.
			30-045-28252
Location of Well, Footage, So	3	21 18 2 De 20 10.	Field and Pool Basin Fruitland Co
1810'FNL, 1240'FEL, Sec.13, '	1-31-N, R-9-W, NMFM	11.	County and State
			San Juan Co, NM
	DIGITE WHITE OF MOTOR	DEDODE OFFIED	D3/II3
2. CHECK APPROPRIATE BOX TO INT Type of Submission	DICATE NATURE OF NOTICE Type of Ac		DATA
X Notice of Intent		Change of Pl	ans
		New Construc	
Subsequent Report		Non-Routine	_
		Water Shut o	
Final Abandonment	Altering Casing _		o Injection
	X Other - pump inst	aliation	
13. Describe Proposed or Comp	leted Operations		
It is intended to install procedure and wellbore		well according	to the attached
procedure and werrbore	aragram.		
			*
	Samueling is true and	govvogt	
14. I hereby certify that the	e foregoing is true and	correct.	
Anna Class	e foregoing is true and (DWM) Title Regulatory		
signed Jeggy (ale	(DWM) Title Regulatory		_Date 2/7/00 TLW
Anna Class	(DWM) Title Regulatory		

Nordhaus #716 PUMPING UNIT INSTALLATION PROCEDURE 1/12/00

<u>Unit H, Section 13, T31N-R9W, San Juan County, New Mexico</u> <u>Lat. 36.900009 / 36° 54.00'</u> Long. 107.726562 / 107° 43.59'

- 1. MIRU pulling unit.
- 2. NDWH / NU BOP. Kill if necessary with produced Fruitland coal water.
- 3. PU two joints of tubing and TIH to tag for fill.
- 4. TOOH with tubing (tubing is set @ 2875'. There are 92 joints of 2-3/8" 4.7# J-55 and an "F" nipple @ 2841').
- 5. PU 4-3/4" bit and 2-3/8", 4.7#, J-55 EUE tubing and TIH to COTD. Circulate hole clean. (Note: COTD is @, ~2919'.)
- 6. TIH w/ 2-3/8" tubing string configured for downhole pump and land @ 2914'. Purge valve will be on bottom, followed by pup joint, perforated sub, and seating nipple. Space out as needed with pup joints.
- 7. Hang tubing in donut. ND BOP / NUWH.
- 8. TIH w/ new 1.25" top hold down pump, 3/4" Grade D sucker rods w/ spray metal couplings, polished rod, and polished rod liner. (Note: Vendor contact is listed below)
- 9. Seat the downhole pump, hang horses head, and space out pump.
- 10. Load tubing, and pressure test.
- 11. Start pumping unit and test (adjust spacing as required).
- 12. RDMO.

COMPLY WITH ALL FEDERAL, STATE AND LOCAL RULES AND REGULATIONS RELATING TO OIL AND GAS OPERATIONS.

Prepared: D.W. Mussett


Pump vendor: ENERGY PUMP

Leo Noyes @ 564-2874

Nordhaus #716

01/12/00 Basin Fruitland Coal

Unit H, Section 13, T31N, R9W, San Juan County, New Mexico

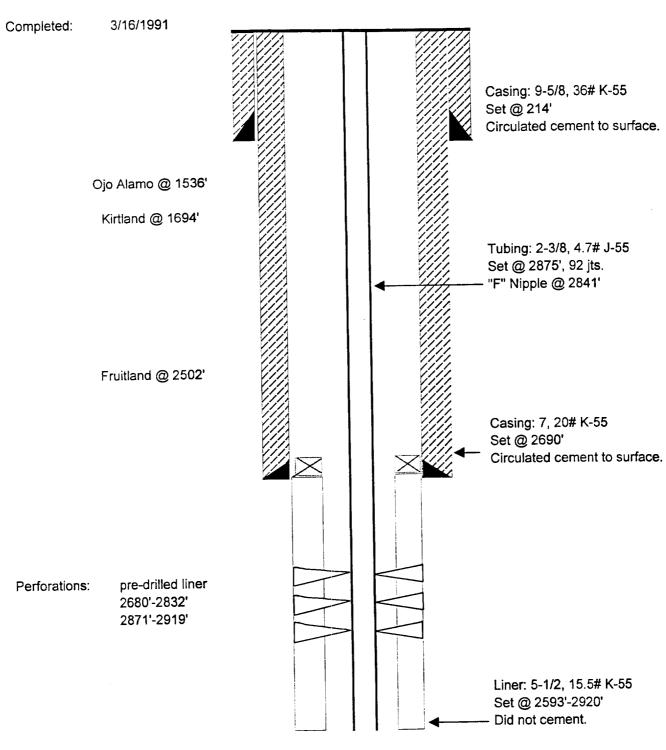

Workover History:

12/97 Pulled & replaced tbg & liner

TD 2921