SCHEMATIC DIAGRAM OF
DUAL COMPLETION ON EPNG HEATON #8

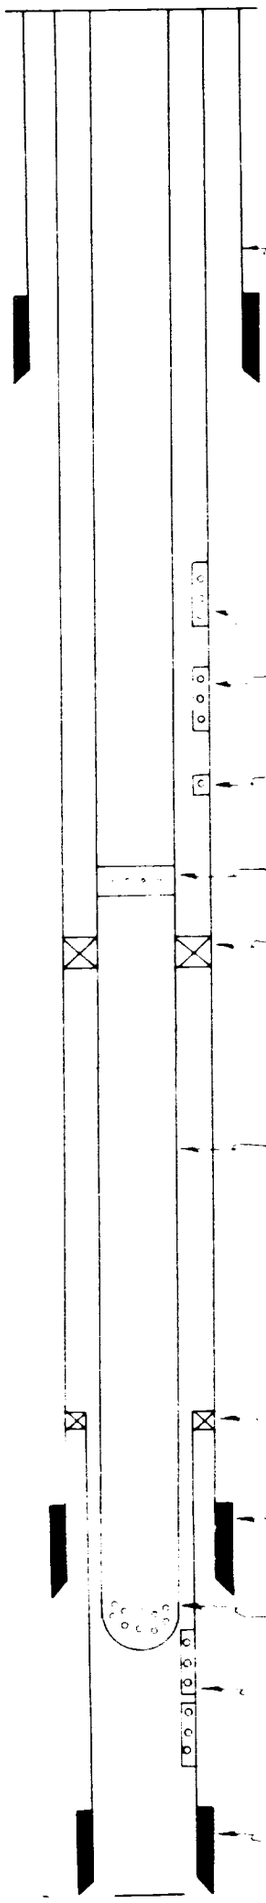

10 3/4", 32.75# S.W. casing at 180' w/150 sacks.

Pictured Cliffs perf. 2412' - 2425', 2436' - 2448'.
4 SPF. Sand-water frac.

Perf. 7" @ 2500' & squeezed w/100 sacks cementing the Pictured Cliffs.

Garrett sidedoor flow nipple @ 2472'.

Baker Model "D" production packer set @ 2568'.

2" EUE tubing set @ 4736'.

RECEIVED
JUN 8 1956
OIL CON. COM.
DIST. 3

Burns liner hanger

7", 20 & 23#, J-55 casing @ 4625' w/250 sacks.

3' perforated nipple in tubing string.

Point Lookout perf. 4706' - 4720', 4740' - 4778' w/4 SPF. Sand-water frac.

5 1/2", 15.50#, J-55 liner @ T.D. 4915' w/100 sacks.

T.D. 4915'