

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT  
Sundry Notices and Reports on Wells

1. Type of Well  
Oil

2. Name of Operator  
Texas Pacific Oil & Gas Co., C/O Joseph E. Seagrams & Sons, Inc.

3. Address & Phone No. of Operator  
800 3<sup>rd</sup> Ave., New York City, NY 10022-7699

4. Location of Well, Footage, Sec., T, R, M  
660' FSL and 990' FWL Sec.27, T-32-N, R-17-W, NMPM

m

5. Lease Number  
14-20-603-5012  
6. If Indian, All. or  
Tribe Name  
Navajo  
7. Unit Agreement Name  
N/A  
8. Well Name & Number  
Navajo A #1  
9. API Well No.  
30-045-1123800  
10. Field and Pool  
Many Rocks  
11. County & State  
San Juan County, NM

12. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OTHER DATA

Type of Submission

☒ Notice of Intent

☐ Subsequent Report

☐ Final Abandonment

Type of Action

☒ Abandonment

☐ Recompletion

☐ Plugging Back

☐ Casing Repair

☐ Altering Casing

☐ Other -

☐ Change of Plans

☐ New Construction

☐ Non-Routine Fracturing

☐ Water Shut off

☐ Conversion to Injection

13. Describe Proposed or Completed Operations

Texas Pacific Oil and Gas Co., proposes to Plug and Abandon this well per the attached procedure and diagram.

RECEIVED  
FEB 25 1997

OIL & GAS  
DIST. 1

97 FEB 25 11:05  
070 PM

14. I hereby certify that the foregoing is true and correct.

Signed William F. Clark Title Contractor Date 2/24/97  
William F. Clark, A-Plus Well Service

(This space for Federal or State Office use)

APPROVED BY /s/ Duane W. Spencer Title \_\_\_\_\_ Date FEB 27 1997

CONDITION OF APPROVAL, if any:

# Navajo #1A-27

## Proposed P&A

Many Rocks Gallup

660'S, 990'W Sec 27, T-32-N, R-17-W, San Juan County, NM

Today's Date: 2/20/97


Spud: 12/5/63

Completed: 1/7/64

Mancos @ Surface

Gallup @ 900'

6-3/4" Hole

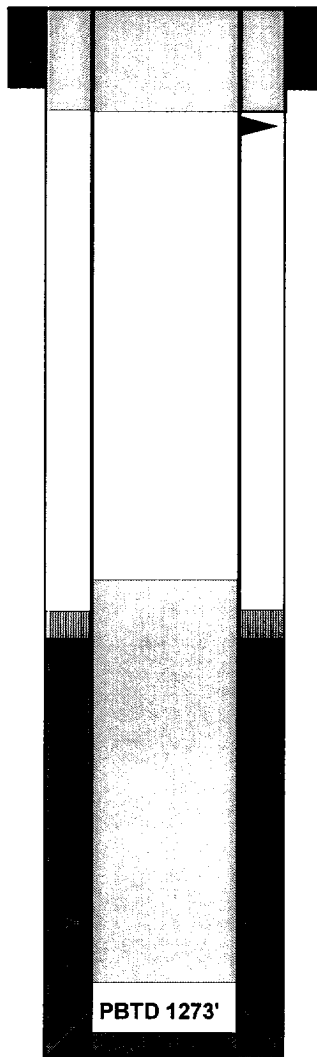

7-5/8" Casing Set @ 30'  
Cmt with 8 sxs (Circulated to Surface)

Perforate at 80'

Plug #2 80' - Surface  
Cmt with 17 sxs Class B

TOC @ 972' (Calc, 100%)

TOC @ 1047' (Calc, 75%)

Plug #1 1273' - 850'  
Cement with 65 sxs Class B  
(50% excess, long plug)

Gallup Perforations:  
1216' - 1222' w/4 spf

4-1/2" 9.5# Casing Set @ 1271'  
Cemented with 35 sxs

PBTD 1273'

TD 1280'

### Well History:

7-5/8" Surface Casing set at 30' cemented to surface

4-1/2" Casing cemented with 35 sxs regular.

Gallup zone perforated 1216' - 1222' with 4 SPF .

American '59 Pump Jack (6700# Arrow engine)

Rods and tubing in well (2-3/8" tubing @ 1231'?)

### Proposed Plugging Procedure:

1. RIH with tubing work string. Plug #1 from 1273' to 850' with 63 sxs Class B cement. POH.
2. WOC, tag cement; then pressure test casing to 300#. POH and LD tubing.
3. Perforate 2 squeeze holes at 80'. Establish circulation out bradenhead. Mix and pump 17 sxs Class B cement from 80' to surface, circulate good cement out bradenhead.
4. WOC then cut off wellhead and install P&A marker.