

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUBMIT IN TRIPLICATE*
(Other instructions on re-
verse side)

Form approved.
Budget Bureau No. 42-R1424.

5. LEASE DESIGNATION AND SERIAL NO.

14-20-600-3539

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

Navajo-Ute Mountain

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

Navajo-Ute Mountain

9. WELL NO.

#32-26

10. FIELD AND POOL, OR WILDCAT

Wildcat

11. SEC., T., R., M., OR BLK. AND
SURVEY OR AREA

SW NE Section 26,
T32N, R17W

12. COUNTY OR PARISH

San Juan

13. STATE

New Mex.

1.

OIL
WELL

☐

GAS
WELL

☐

OTHER

Dry Hole

2. NAME OF OPERATOR

The Superior Oil Company

3. ADDRESS OF OPERATOR

P. O. Drawer 'G', Cortez, Colorado

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.*

See also space 17 below.)

At surface

1975' from East line and 2262' from North line,
Section 26

14. PERMIT NO.

15. ELEVATIONS (Show whether DF, RT, GR, etc.)

5807' Gd., 5819' K.B.

16.

Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF

☐
☐
☐
☐

PULL OR ALTER CASING

☐
☐
☐
☐

FRACTURE TREAT

MULTIPLE COMPLETE

SHOOT OR ACIDIZE

ABANDON*

REPAIR WELL

CHANGE PLANS

(Other)

SUBSEQUENT REPORT OF:

WATER SHUT-OFF

☐
☐
☐
☐

FRACTURE TREATMENT

SHOOTING OR ACIDIZING

(Other)

REPAIRING WELL

ALTERING CASING

ABANDONMENT*

☐
☐
☒
☐

(NOTE: Report results of multiple completion on Well
Completion or Recompletion Report and Log form.)



17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Plugged and abandoned well on September 26, 1964 at 1797' T.D. as follows:

Plug #1: Placed 25 sacks common cement in bottom of 6-3/4" air drilled hole.
Filled hole with water.

Plug #2: Placed 10 sacks common cement in top of 8-5/8" surface casing.

Welded plate to casing stub and erected standard dry hole marker.

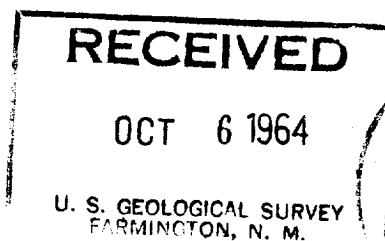

18. I hereby certify that the foregoing is true and correct

ORIGINAL SIGNED BY

SIGNED

J. C. GORDY

TITLE

Drilling Engineer

DATE

Oct. 1, 1964

(This space for Federal or State office use)

APPROVED BY

[Signature]

TITLE

DATE

CONDITIONS OF APPROVAL, IF ANY:

JCC/njh

*See Instructions on Reverse Side