

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☐ well gas ☒ well other ☐

2. NAME OF OPERATOR P.O. Box 808
Supron Energy Corp % John H. Hill, et al

3. ADDRESS OF OPERATOR Suite 020, Kysar Building
300 W. Arrington, Farmington, New Mexico 87401

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)

AT SURFACE: 930' FSL & 830' FEL (SE SE)

AT TOP PROD. INTERVAL:

AT TOTAL DEPTH:

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

TEST WATER SHUT-OFF ☐

FRACTURE TREAT ☐

SHOOT OR ACIDIZE ☐

REPAIR WELL ☐

PULL OR ALTER CASING ☐

MULTIPLE COMPLETE ☐


CHANGE ZONES ☐

ABANDON* ☐

(other) Pictured Cliffs

SUBSEQUENT REPORT OF:

☐
☐
☐
☐
☐
☐
☐
☒

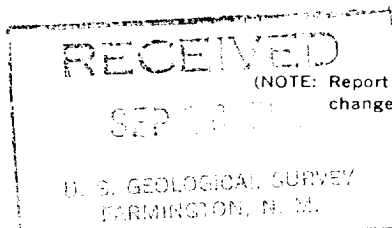

5. LEASE

SF - 078818A

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

N/A

7. UNIT AGREEMENT NAME

N/A

8. FARM OR LEASE NAME

USA

9. WELL NO.

3

10. FIELD OR WILDCAT NAME

Ballard Pictured Cliffs

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA

Sec. 23 T32N R13W

12. COUNTY OR PARISH

13. STATE

San Juan

New Mexico

14. API NO.

15. ELEVATIONS (SHOW DF, KDB, AND WD)

5986' GR

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Displace casing with 9.2# Mud, Viscosity 45. Set cast iron bridge plug at 1750'. Dump bail 5 sx. Class "B" cement on bridge plug for fill to 1690'. Set cast iron bridge plug at 1616'. Dump bail 10 sx. Class "B" cement on top of bridge plug for fill to 1496'. Set cast iron bridge plug at 382'. Dump bail 10 sx. Class "B" cement on top of bridge plug for fill to 262'. Dump bail Class "B" cement plug from 50' to surface. Well plugged as witnessed by and per directives by USGS and in compliance with CFR-221.22. Job completed at 3:30 P.M., MST, 9/1/81.

RECEIVED
FEB 11 1985

Subsurface Safety Valve: Manu. and Type

18. I hereby certify that the foregoing is true and correct

SIGNED

James V. Waller

TITLE

Exploration/Development
Superintendent

DATE

September 10, 1981

(This space for Federal or State office use)

APPROVED BY

TITLE

DATE

CONDITIONS OF APPROVAL, IF ANY:

Approved as to plugging of the well bore.
Liability under bond is retained until
surface restoration is completed.

See Instructions on Reverse Side

APPROVED
AS AMENDED

FEB 06 1985

James V. Waller
M. MILLENBACH
AREA MANAGER

NMOCC