

**UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY**

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil well gas well other

2. NAME OF OPERATOR
AMOCO PRODUCTION COMPANY

3. ADDRESS OF OPERATOR
501 Airport Drive, Farmington, NM 87401

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 935' FNL X 980' FEL
AT TOP PROD. INTERVAL: Same
AT TOTAL DEPTH: Same

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:	SUBSEQUENT REPORT OF:
TEST WATER SHUT-OFF <input type="checkbox"/>	<input type="checkbox"/>
FRACTURE TREAT <input type="checkbox"/>	<input type="checkbox"/>
SHOOT OR ACIDIZE <input type="checkbox"/>	<input type="checkbox"/>
REPAIR WELL <input type="checkbox"/>	<input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	<input type="checkbox"/>
MULTIPLE COMPLETE <input type="checkbox"/>	<input type="checkbox"/>
CHANGE ZONES <input type="checkbox"/>	<input type="checkbox"/>
ABANDON* <input type="checkbox"/>	<input type="checkbox"/>
(other) <u>Completion</u>	

5. LEASE
I-22-IND-619

6. IF INDIAN, ALLOTTEE OR TRIBE NAME
Ute Mountain Tribe

7. UNIT AGREEMENT NAME
Develope Contract No. 14-20-604-62

8. FARM OR LEASE NAME
Ute Indians A

9. WELL NO.
21

10. FIELD OR WILDCAT NAME
Ute Dome Dakota


11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA
NE/4 NE/4 Section 34
T32N, R14W

12. COUNTY OR PARISH
San Juan

13. STATE
NM

14. API NO.
30-045-24608

15. ELEVATIONS (SHOW DF, KDB, AND WD)
5947' GL

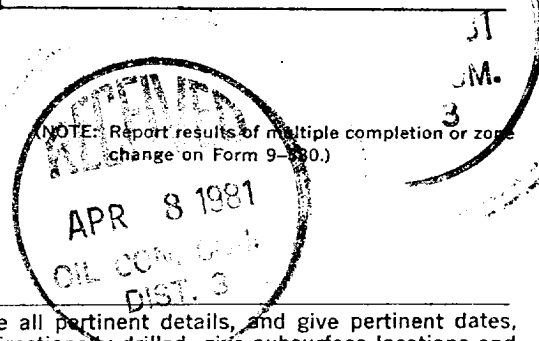

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Completions operations commenced on 3-12-81. Total depth of the well is 2622' and plugback depth is 2574'. Perforated intervals from 2230-2240', 2270-2284', 2356-2364', with 2 spf, a total of 64, .38" holes. Fraced with 76,000 gallons of foam and 120,000# of 20-40 sand. Landed 2-3/8" tubing at 2360'. Released the rig on 3-16-81.

Subsurface Safety Valve: Manu. and Type _____ Set @ _____ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED _____ TITLE Dist Admin Supvr DATE APR 8 1981

(This space for Federal or State office use)

ACCEPTED FOR RECORD

APPROVED BY _____ TITLE _____ DATE _____

CONDITIONS OF APPROVAL, IF ANY:

APR 7 '81
George DISTRICT
BY _____

*See Instructions on Reverse Side