

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY


SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-131-C for such proposals.)

1. oil well ☐ gas well ☒ other ☐
2. NAME OF OPERATOR
Supron Energy Corp. % John H. Hill, et al
3. ADDRESS OF OPERATOR Suite 020, Kysar Building
300 W. Arrington, Farmington, New Mex. 87401
4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 1730 FNL & 1520 FEL (SW NE)
AT TOP PROD. INTERVAL:
AT TOTAL DEPTH:
16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:
TEST WATER SHUT-OFF
FRACTURE TREAT
SHOOT OR ACIDIZE
REPAIR WELL
PULL OR ALTER CASING
MULTIPLE COMPLETE
CHANGE ZONES
ABANDON* ☒
(other) Pictured Cliffs

SUBSEQUENT REPORT OF:

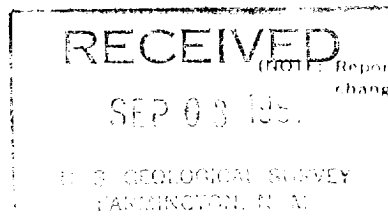

5. LEASE
SF-078818A
6. IF INDIAN, ALLOTTEE OR TRIBE NAME
N/A
7. UNIT AGREEMENT NAME
N/A
8. FARM OR LEASE NAME
USA
9. WELL NO.
#1-M
10. FIELD OR WILDCAT NAME
Pictured Cliffs
11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA
Sec 24 T 32N R 13W
12. COUNTY OR PARISH
San Juan
13. STATE
New Mexico
14. API NO.
15. ELEVATIONS (SHOW DF, KDB, AND WD)
6017 GR

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

We respectfully request permission to set cast iron bridge plug #1 at 1504' (Pictured Cliffs Formation). Place 10 sx class "B" cement on top of bridge plug with wireline bailer for 100' fill up to 1404'. Set cast iron bridge plug #2 at 372' (bottom of 8 5/8" surface pipe). Place 10 sx class "B" cement on top of bridge plug with wireline bailer for 100' fill up to 272'. Spot cement plug from 50' to surface. Plugging operation to be commenced by displacing 4 1/2" casing with 9.5# mud. Plugged well to be marked per CFR 221.22.

VERBAL approval granted by Mr. Richard Bell, U.S.G.S., 10:45 a.m. MST, 8-31-81.
Call U.S.G.S. (325-4572) 1 hour prior to plugging - representative needs to be present.

Subsurface Safety Valve: Manu. and Type

18. I hereby certify that the foregoing is true and correct

SIGNED *Herman V. Willis* TITLE

DATE

(This space for Federal or State office use)

APPROVED BY
CONDITIONS OF APPROVAL, IF ANY:

TITLE

DATE

*See Instructions on Reverse Side

NMOCC

