

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

Form Approved.
Budget Bureau No. 42-R1424


SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)


1. oil well ☐ gas well ☒ other ☐
2. NAME OF OPERATOR P.O. Box 808
Supron Energy Corp. % John H. Hill, et al
3. ADDRESS OF OPERATOR Suite 020, Kysar Building
300 W. Arrington, Farmington, New Mexico 87401
4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 1730' FNL & 1520' FEL (SW NE)
AT TOP PROD. INTERVAL:
AT TOTAL DEPTH:

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO: SUBSEQUENT REPORT OF:
TEST WATER SHUT-OFF ☐ ☐
FRACTURE TREAT ☐ ☐
SHOOT OR ACIDIZE ☐ ☐
REPAIR WELL ☐ ☐
PULL OR ALTER CASING ☐ ☐
MULTIPLE COMPLETE ☐ ☐
CHANGE ZONES ☐ ☐
ABANDON* ☐ ☒
(other) Pictured Cliffs & Mesa Verde

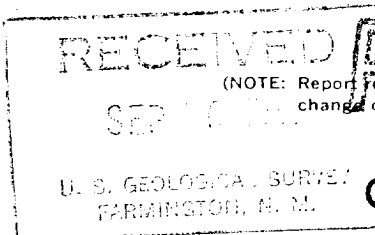

5. LEASE
SF - 078818A
6. IF INDIAN, ALLOTTEE OR TRIBE NAME
N/A
7. UNIT AGREEMENT NAME
N/A
8. FARM OR LEASE NAME
USA
9. WELL NO.
1-M
10. FIELD OR WILDCAT NAME
Ballard Pictured Cliffs
11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA
Sec. 24 T32N R13W
12. COUNTY OR PARISH
San Juan
13. STATE
New Mexico
14. API NO.
15. ELEVATIONS (SHOW DF, KDB, AND WD)
6017' GR

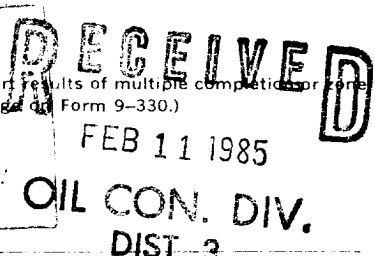

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Displace casing with 9.2# Mud, Viscosity 47. Set cast iron bridge plug at 4125'. Dump bail 5 sx. Class "B" cement on top of bridge plug for fill to 4065'. Set cast iron bridge plug at 3229'. Dump bail 10 sx. Class "B" cement on top of bridge plug for fill to 3109'. Set cast iron bridge plug at 1504'. Dump bail 10 sx. Class "B" cement on top of bridge plug for fill to 1384'. Set cast iron bridge plug at 372'. Dump bail 10 sx. Class "B" cement on top of bridge plug for fill to 252'. Dump bail Class "B" cement. Plug from 50' to surface. Well plugged as witnessed by and per directives by USGS and in compliance with CFR 221.22. Job complete at 1:30 P.M. 9-3-81.

APPROVED
AS AMENDED

Subsurface Safety Valve: Manu. and Type

Set @

18. I hereby certify that the foregoing is true and correct.

SIGNED James W. Miller Exploration/Development
Superintendent DATE

September 9, 1981

(This space for Federal or State office use)

APPROVED BY
CONDITIONS OF APPROVAL, IF ANY:

TITLE

DATE

FEB 06 1985
M. MILLENBACH
AREA MANAGER

Approved as to plugging of the well bore.
Liability under bond is retained until
surface restoration is completed.

Instructions on Reverse Side

NMOCC

BY