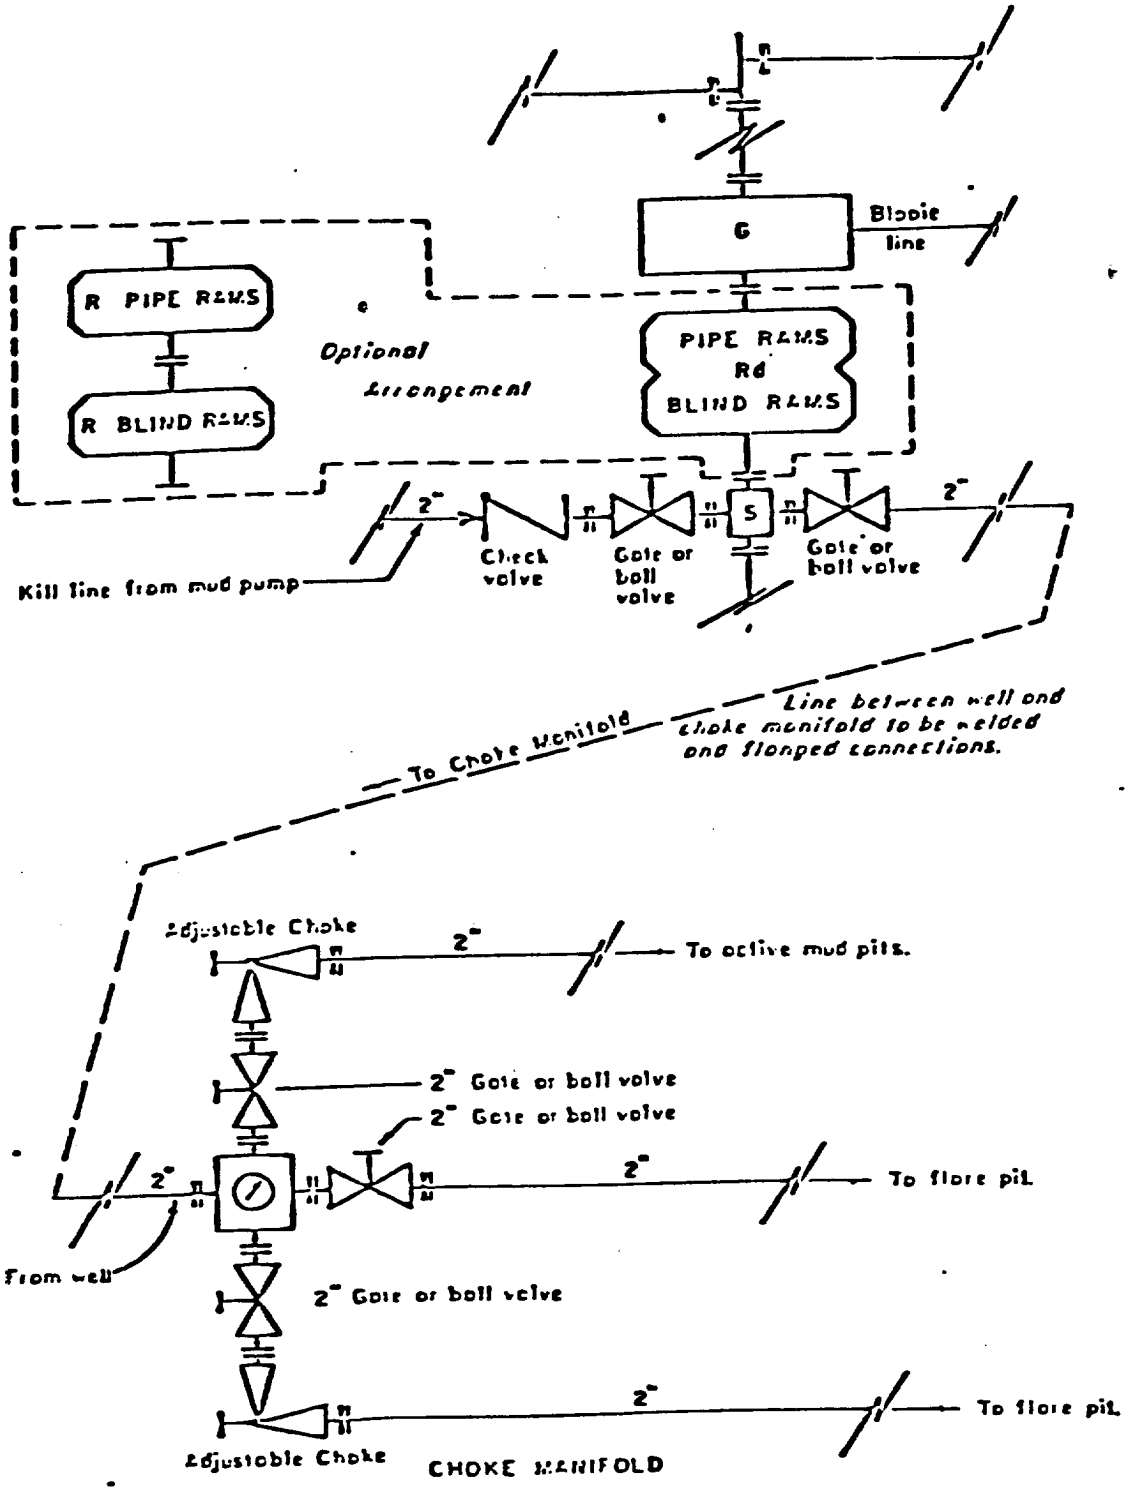

All equipment to be 3,000 psi working pressure except as noted.

Rd Double ram type preventer with two sets of rams.

R Single ram type preventer with one set of rams.

S Drilling spool with side outlet connections for choke and kill lines.

G Rotating head 150 psi working pressure minimum

ARRANGEMENT C

TENNECO OIL COMPANY
ROCKY MOUNTAIN DIVISION

REQUIRED MINIMUM
BLOWOUT PREVENTER AN
CHOKE MANIFOLD

J. MAGILL 10-26-78 EVI