

Well Oil Corp
OPERATOR Paul B. English PERMITTEE M. S. Douthit WELL No. 1

Field <u>Wildcat</u>	7-11-49	Loc. <u>Dr 1497 sh spnd 7-28-49</u>
County <u>San Juan</u>	AUG 3 1949	
State <u>N. Mex.</u>	AUG 17 1949	
Sec. <u>8</u> T. <u>27 N.</u> R. <u>13 W.</u>	AUG 24 1949	
Subdivision <u>SW</u> <u>NE</u> <u>NE</u>	AUG 31 1949	
Location <u>990' N & E</u>	SEP 14 1949	
Serial No. <u>N. M. 02836</u>	SEP 28 1949	
Ref. No. <u>1</u> Elev. <u>5938</u> L. and S. <u>Torrejon-Puercio</u>	10-1-49	
Rig <u>Surface</u>		
Contractor		
Casing <u>15 1/2" - 1 joint</u>		
Geology <u>TA</u>	10-30-49	
<u>15 - 1135 - set</u>		
<u>104 - 2222 - set</u>		
<u>2394 set</u>		
<u>7 - 5916 - set</u>		
TBL		
<u>P.C. 1333</u>	NOV 30 1949	
<u>P.L. 3890</u>	DEC 14 1949	
<u>C.H. 2876</u>	12-18-49	
<u>M.C. Rec 2913</u>	JAN 11 1950	
<u>M.J. 4151</u>	FEB 22 1950	
<u>D.K. 5404</u>	MAR 9 1950	
	MAR 22 1950	
	APR 19 1950	
	MAY 3 1950	
	MAY 17 1950	
	MAY 31 1950	
	JUN 1 1950	
	JUL 5 1950	
	JUL 19 1950	

TD 1355 sd TD
G29 sd 168 MCF/D
Tara op. 2

TD 1860 F39
TD 1860 sd Pi drill
TD 2222 HF 321/4 W
W O csg
TD 2222 sh SD csg.

Sundry notice shows: No F8ton sand encountered. Gas gauging approx. 260 MCF @ 1335. 3 bailers W per hr. in bottom of PC from 1375-95. Set 13-3/8 thru PC @ 1435. Tstg. for WSO, to drill deeper.

TD 2222. WO 10" csg. W@ 2205, thot to be lower part of Lewis shale section. Hole caving. To run 10" to shut off water. Housing rig for winter. (Sundry Notice dated 10-30-49) X


TD 2300 sd SDO

Dr 2620 sh

Dr 2719 sd & sh. 10" carried to 2500'. (Opr.)

TD 2831 sh SD weather
SDO

13 (10 sd, 3 blk, carb. sh)
3915-27 Rec 12 sd
3927-45 Rec
12 sd + sh

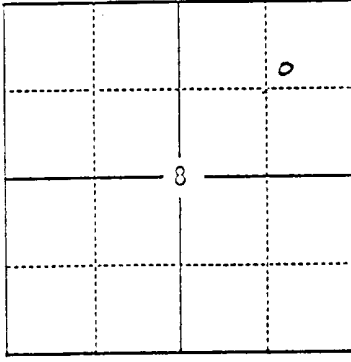

GPO WFSO 1-19-44-2000-21-354