

DISTRICT I
P.O. Box 1980, Hobbs, NM 88240

DISTRICT II
P.O. Drawer DD, Artesia, NM 88210

DISTRICT III
1000 Rio Brazos Rd., Aztec, NM 87410

OIL CONSERVATION DIVISION

2040 Pacheco St.
Santa Fe, NM 87505

WELL API NO.	30-025-25962
Indicate Type of Lease	STATE ☐ FEE ☒
State Oil & Gas Lease No.	
Lease Name or Unit Agreement Name	Boren-Greer Gas Com
Well No.	2
Pool name or Wildcat	Jalmat (T-Y-7R) Gas

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)	
Type of Well: OIL WELL ☐ GAS WELL ☒ OTHER	
Name of Operator Doyle Hartman	
Address of Operator 500 N. Main St., Midland, TX 79701	
Well Location Unit Letter C : 890' Feet From The North Line and 1780' Feet From The West Line Section 21 Township 22S Range 36E NMPM Lea County	
Elevation (Show whether DF, RKB, RT, GR, etc.) 3523' GR	

11

Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

SUBSEQUENT REPORT OF:

PERFORM REMEDIAL WORK ☐
TEMPORARILY ABANDON ☐
Casing & Cement Repair ☐
OTHER: ☐


PLUG AND ABANDON ☒
CHANGE PLANS ☐
OTHER: ☐

REMEDIAL WORK ☐
COMMENCE DRILLING OPNS. ☐
CASING TEST AND CEMENT JOB ☐
OTHER: ☐

ALTERING CASING ☐
PLUG AND ANBANDONMENT ☐
OTHER: ☐

Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work) SEE RULE 1103.

For details of proposed plugging and abandonment operations, please refer to pages 2 of 3 thru 3 of 3 attached hereto, and made a part hereof.



THE COMMISSION MUST BE NOTIFIED 24 HOURS PRIOR TO THE BEGINNING OF PLUGGING OPERATIONS FOR THE C-103 TO BE APPROVED.

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Steve Hartman TITLE Engineer DATE 04/01/2004

TYPE OR PRINT NAME Steve Hartman

TELEPHONE NO. (432) 684-4011

(This space for State Use)

APPROVED BY

Larry W. Wink

OC FIELD REPRESENTATIVE II/STAFF MANAGER

CONDITIONS OF APPROVAL, IF ANY:

APR 12 2004


Details of Proposed Plugging and Abandonment Operations

1. Move in well service unit.
2. Pull and lay down 3/4" rod string. Pull 2 3/8" O.D. tubing.
3. Run and set 5 1/2" EZ-drill retainer at 900'.
4. Run 2 3/8" O.D. tubing equipped with cementing stinger.
5. Sting into retainer test position.
6. Pressure test tubing to 4000 psi.
7. Sting into retainer pump position.
8. Perform injectivity test down 2 3/8" O.D. tubing and below 5 1/2" EZ-Drill retainer.
9. Squeeze cement open-hole interval, from 3440' to 3570', and fill 5 1/2" O.D. casing with cement, from 900' to 3440', by pumping 385 cu.ft. of cement slurry, consisting of 150 sx of API Class "C" cement containing 2.5% CaCl_2 , 5 lb/sx Gilsonite, 0.50 lb/sx Flocele, followed by 100 sx of HLC containing 3% CaCl_2 . Stage to a stabilized wellhead pressure. Pull out of stinger. Dump excess cement on top of retainer.
10. Pull and lay down 2 3/8" O.D. tubing.
11. Install 5 1/2" cementing head.
12. Squeeze down 5 1/2" O.D. casing, and out casing hole, at 535' to 550', with remaining on-hand HLC cement, followed by 150 sx of API Class "C" cement containing 3% CaCl_2 , 5 lb/sx Gilsonite, 0.50 lb/sx Flocele.
13. Leave 5 1/2" O.D. casing full of cement.

Page 3 of 3
NMOCD Form C-103 dated April 1, 2004
Doyle Hartman
Boren Greer Gas Com No. 2
C-21-22S-36E
API No. 30-025-25962

14. Install abandonment marker.
15. Clean location.

Wellbore Schematic
Plugging and Abandonment Procedure
Boren Greer Gas Com No. 2
890' FNL & 1780' FWL (Unit C)
Section 21, T-22-S, R-36-E
Doyle Hartman
(Sun Oil Co.)

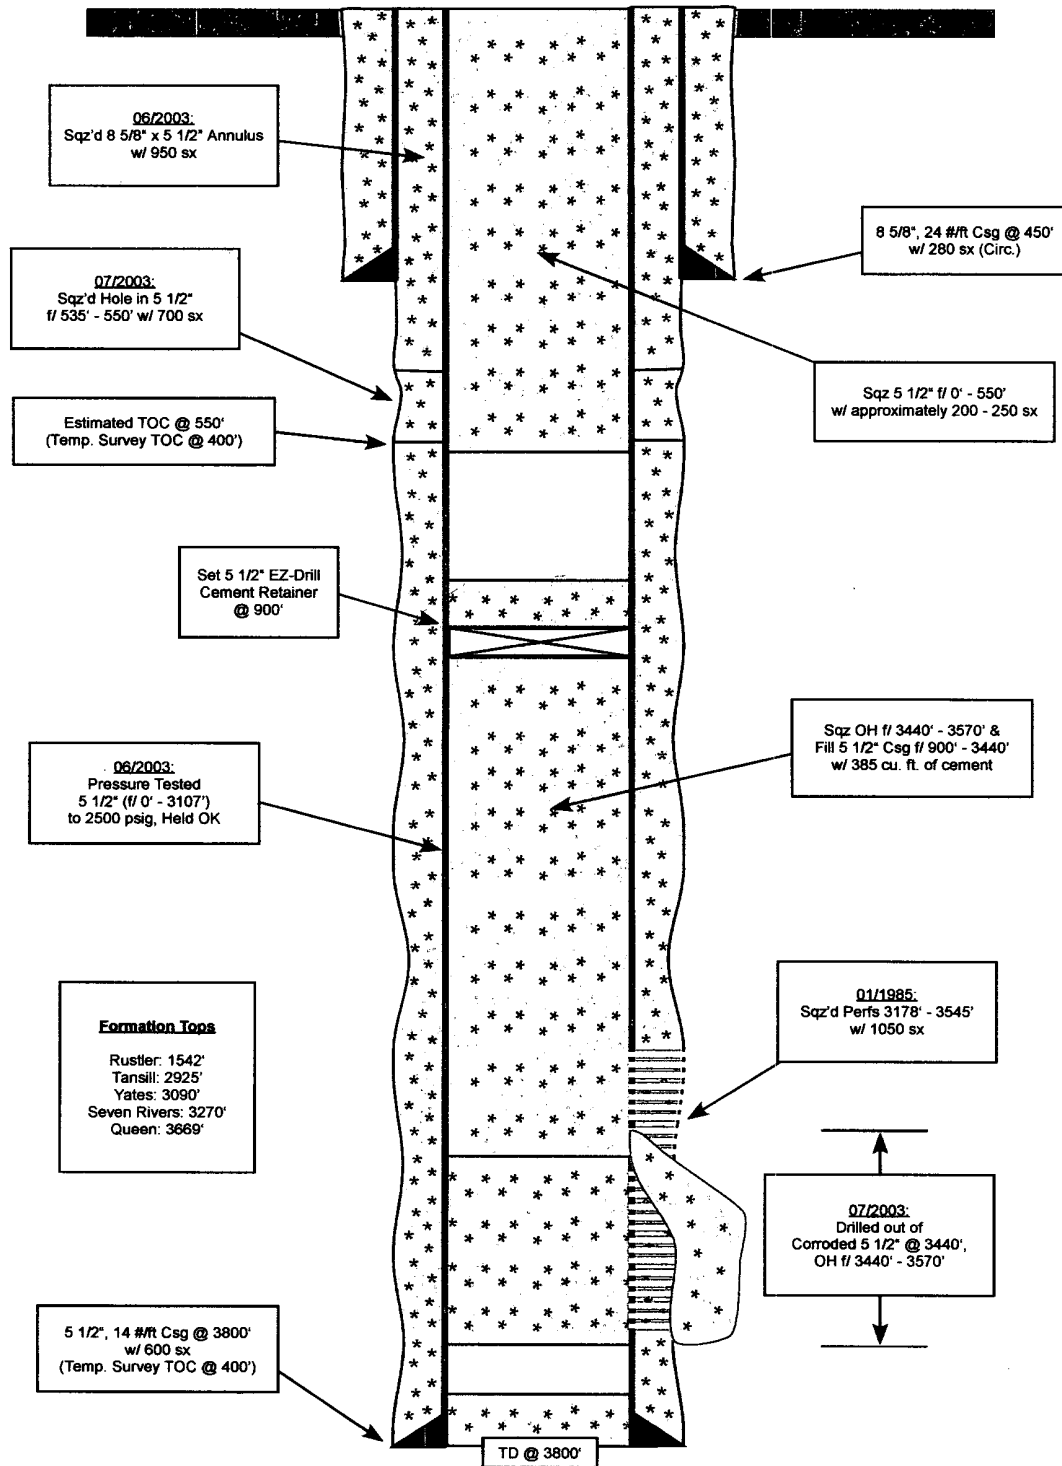

WELL COMPLETION SKETCHES
SUIV-6641-A

BOREN & GREEN GAS UNIT #2. JALMAT 11-27-78
WELL FIELD DATE 596

☐ PRESENT COMPLETION

☐ SUGGESTED COMPLETION

☐ ORIGINAL COMP.

WELL CLASS GF

PERMANENT WELL BORE DATA

8 3/8", 24", K-55 @ 450' w/ 2800' cnc
TOC: 5 1/2" x hole @ 450' by T.S.

DATA ON THIS COMPLETION

JALMAT PERFS: 21 holes

3447, 46, 48, 52, 54, 56, 59, 61, 81, 83


3485, 91, 93, 3515, 17, 19, 21, 23, 41, 43, 45

2 1/4", 42", J-55 @ 3412'
SN. @ 3416'


PBTD - 3780'

5 1/2", 14", K-55, @ 3800' w/ 6000'

TD - 3800



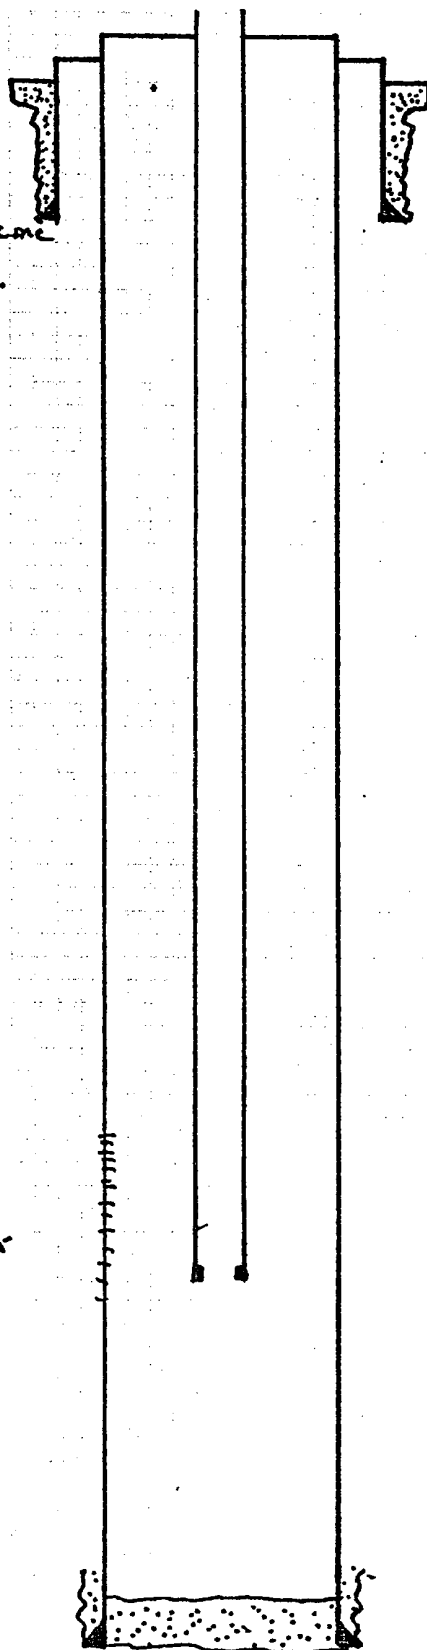


BOREN GREER # 2
JALMAT (YATES-7RV)
C - 21- 22S - 36E
DOYLE HARTMAN

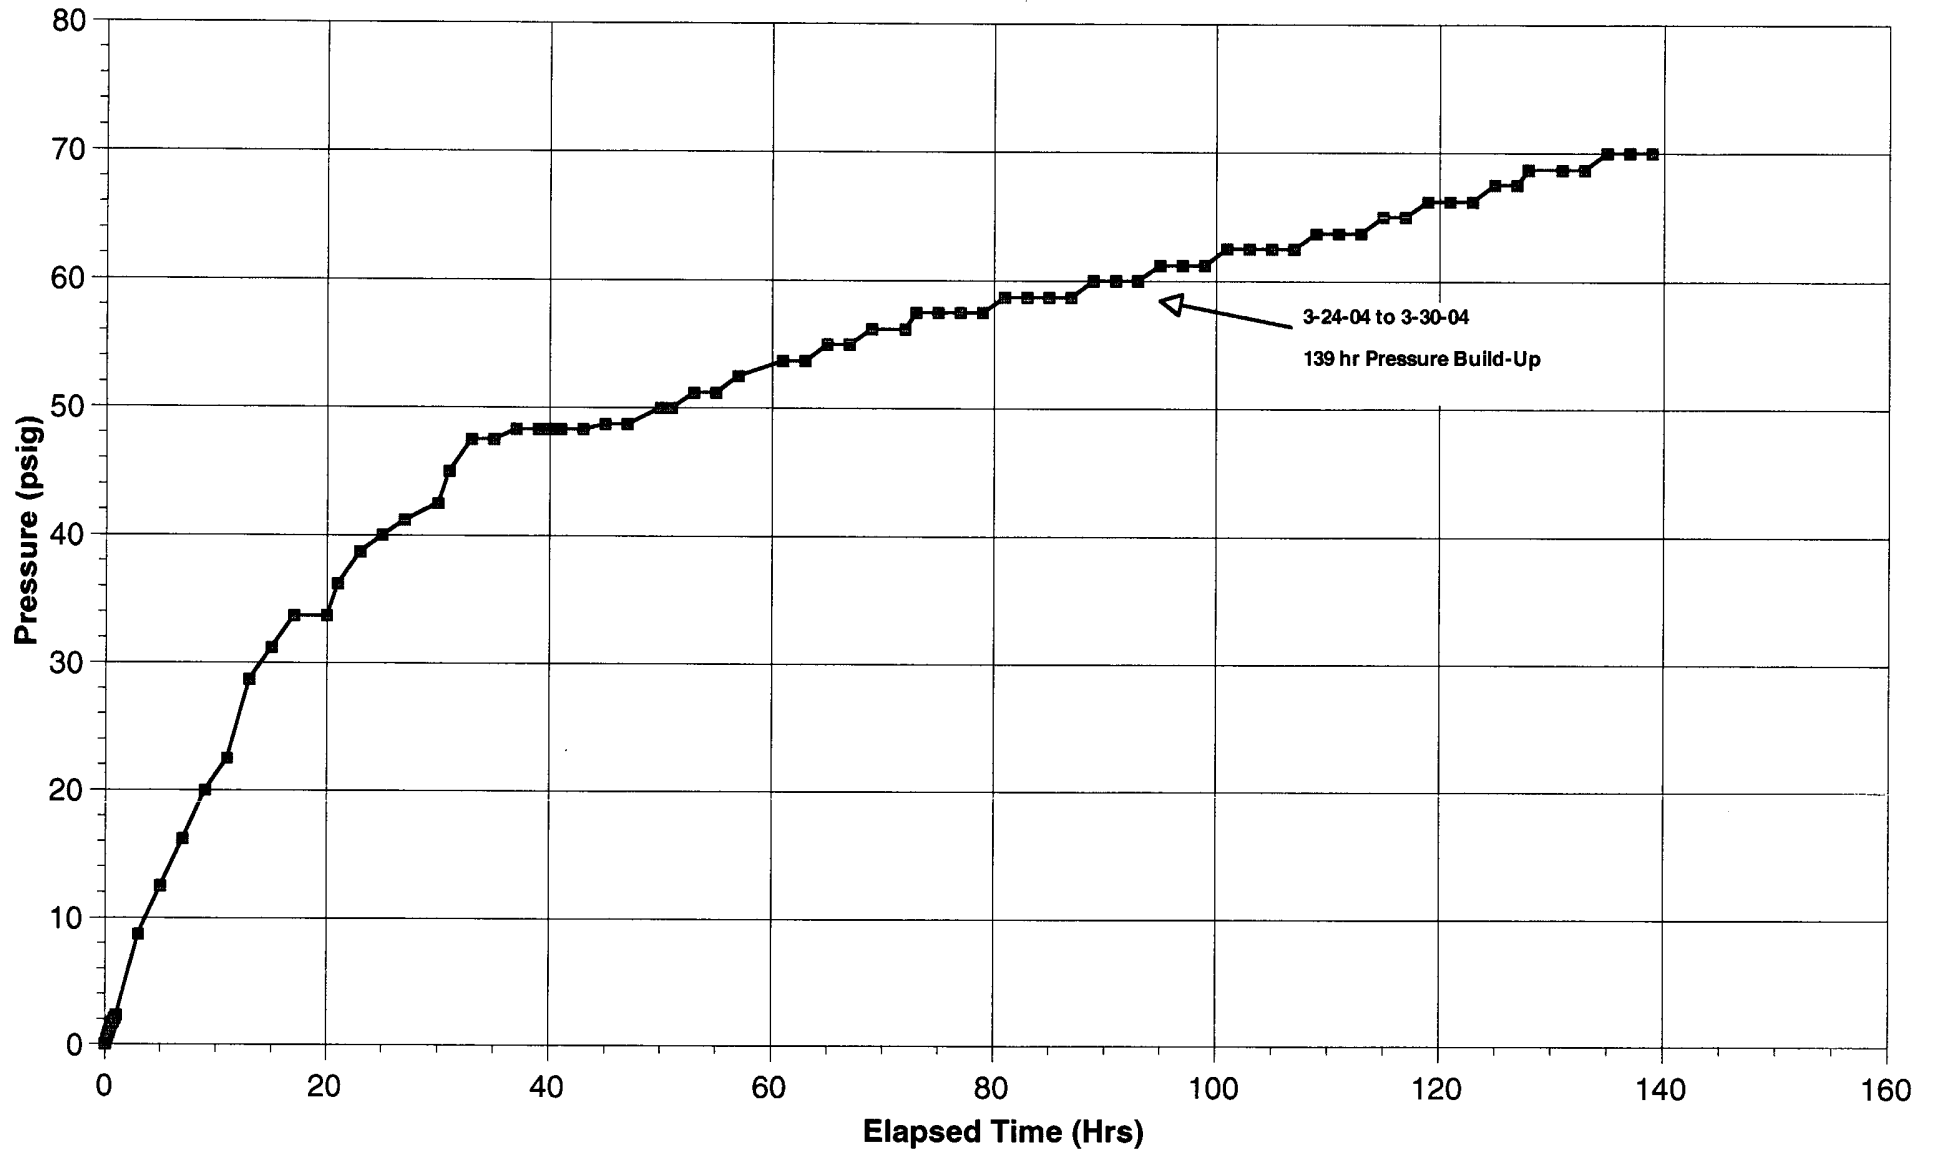

—■— (PSIG) 3-24-04 to 3-30-04

Boren-Greer Gas Com #2
Jalmat (T-Y-7R)
C-21-22S-36E
Doyle Hartman

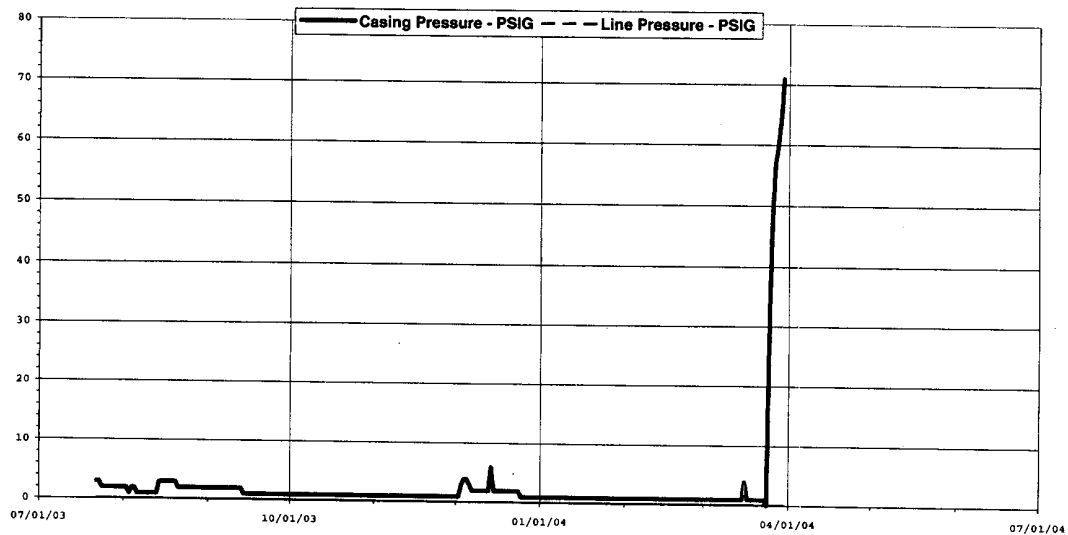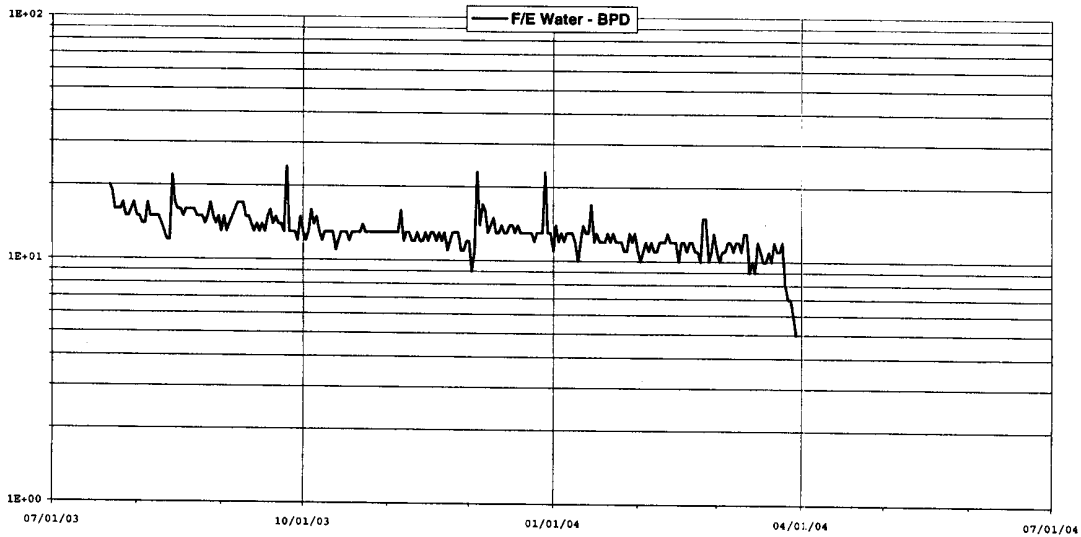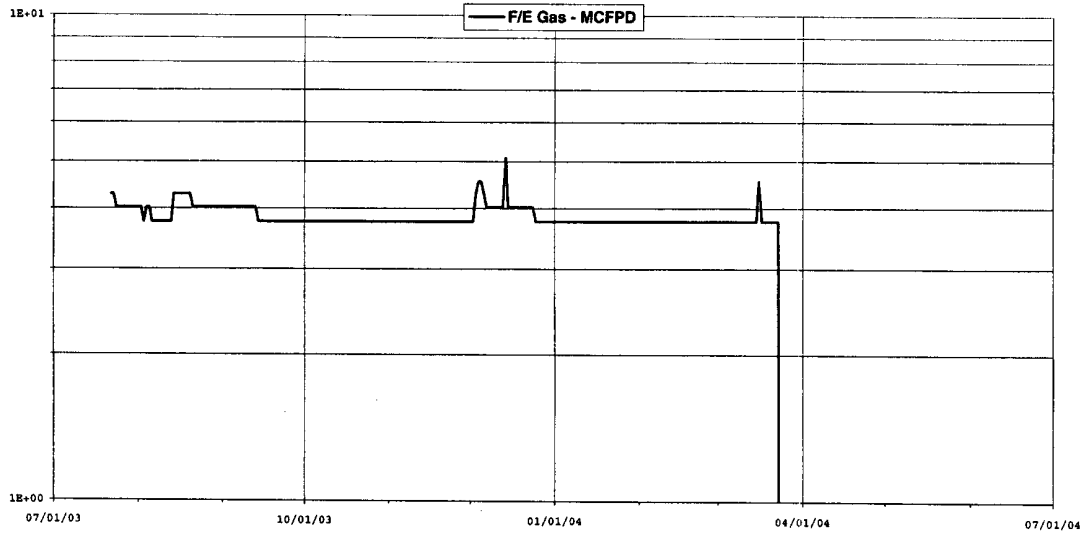

03/30/04: 0.003 BCF 0.0 MBO 10.9 MBW