

District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

NOB3S OCO
MAY 20 2013

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 30-025-09613
5. Indicate Type of Lease STATE <input type="checkbox"/> FEE <input checked="" type="checkbox"/>
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name S.R. COOPER
8. Well Number 002
9. OGRID Number 162683
10. Pool name or Wildcat JALMAT; YATES, 7R, QN, GB

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐

2. Name of Operator
CIMAREX ENERGY CO. OF COLORADO

3. Address of Operator
600 N. MARIENFELD, SUITE 600, MIDLAND, TEXAS 79701

4. Well Location
Unit Letter I : 1650 feet from the SOUTH line and 330 feet from the EAST line
Section 23 Township 24S Range 36E NMPM LEA County

11. Elevation (Show whether DR, RKB, RT, GR, etc.)
3,336' - GR

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ P AND A ☐
CASING/CEMENT JOB ☐

OTHER: ☐

OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

- 1) TAG EXISTING 5-1/2" CIBP @ +/-2,974'; PUMP 25 SXS. CMT. @ 2,974'-2,850' (PERFS. X B/SALT); WOC X TAG.
- 2) CIRC. WELL W/ PXA MUD.
- 3) PUMP 25 SXS. CMT. @ 1,261'-1,140' (T/SALT, T/ANHY. X 5-1/2" DV TOOL); WOC X TAG CMT. PLUG.
- 4) CIRC. TO SURF. 60 SXS. CMT. @ 450'-3' (HOLES IN CSG. X 8-5/8" CSG. SHOE).
- 5) DIG OUT X CUT OFF WELLHEAD 3' B.G.L.; WELD ON STEEL PLATE TO CSGS. X INSTALL DRY HOLE MARKER.

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE

David A. Eyler

TITLE: AGENT

DATE: 05/17/13

Type or print name: DAVID A. EYLER

E-mail address: deyler@milagro-res.com

PHONE: 432.687.3033

For State Use Only

APPROVED BY:

[Signature]

TITLE

Dist. Manager

DATE 5-22-2013

Oil Conservation Division - Hobbs office: **Must be Notified 24 hours prior** to the beginning of Plugging Operations begin.

P.M.
MAY 23 2013
Chm

8 5/8" csg @ 298'
Cmt'd w/ sxs, circl'd cmt

Sqz'd with 160 sxs cement

Hole in Csg (337'-397')

DV Tool @ 1204

Ran 8/09

Quantity	Description	Length	Setting Depth
89	2-3/8" J-55 EUE 8rd	2748.23	2748.23
1	2-3/8" X 5-1/2" TAC	3.00	2751.23
4	2-3/8" J-55 EUE 8rd	125.95	2877.18
1	2-3/8" SN	1.10	2878.28
1	2-3/8" X 4" Perf Sub	4.10	2882.38
1	2-3/8" BPMA	32.11	2914.49
1	1-1/4" X 12' PR w/liner		
4	3/4" Pony Rods		
110	3/4" Rods		
1	1/2" Sinker Bars		
1	20-125-RHBC-12-4-00 Pumpw/		
	1" X 10' GA		
	Total Length	2884.00	


CIBP @ 2974'
5 1/2" csg @ 2994'
Cmt'd w/ sxs, circl'd cmt

Perf's: 2905'-2952'

OH 2994'-3179'

PBTD:
TD: 3179'

8 5/8" csg @ 298'
Cmt'd w/ sxs, circl'd cmt
Sqz'd with 160 sxs cement

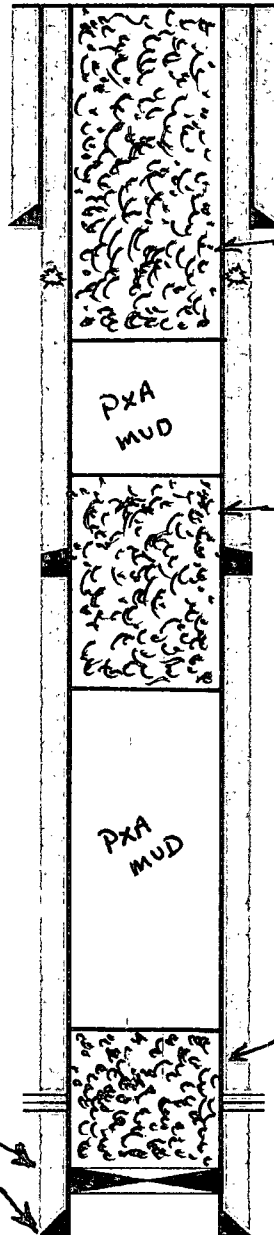

CIRC. 60 SXS. CMT. @ 450' - 3'

Hole in Csg (337'-397')

Pump 25 SXS. CMT. @ 1261' - 1140' - DAG

DV Tool @ 1204

Pump 25 SXS. CMT. @ 2974' - 2850'

Perfs: 2905'-2952'

CIBP @ 2974'
5 1/2" csg @ 2994'
Cmt'd w/ sxs, circl'd cmt

OH 2994'-3179'

PBTD:
TD: 3179'

DAG 05/15/13