District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Avenue, Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico Energy Minerals and Natural Resources

Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505 For drilling and production facilities, submit to appropriate NMOCD District Office.
For downstream facilities, submit to Santa Fe office


Pit or Below-Grade Tank Registration or Closure
Is pit or below-grade tank covered by a "general plan"? Yes \(\subseteq \) No \(\subseteq \)

Type of action: Registration of a pit or below-grade tank [Closure of a pit or below-grade tank []	
Operator: Pogo Producing Company Telephone: 432-685-8100 e-mail address: wright@pogoproducing.com	
Address: P. O. Box 10340, Midland, TX 79702	
Facility or well name: <u>Cotton Draw Unit #96</u> API #: <u>30-025-37594</u> <u>U/L or Qtr/Qtr M Sec 15 T 25S R 32E</u>	
County: Lea Latitude 32:0	Average Control of the Control of th
Surface Owner: Federal State Private Indian	
Pit	Relow-grade tank
Type: Drilling ☑ Production ☐ Disposal ☐	Below-grade tank Volume:bbl Type of fluid: Construction material:
Workover ☐ Emergency ☐	Construction materials
Lined \(\subseteq Unlined \subseteq \)	Pouble welled with look detection? Yes I found to the second to the seco
Liner type: Synthetic ☑ Thickness 12 mil Clay ☐	Double-walled, with leak detection? Yes If not, explain why note that
Pit Volume 28000 bbl	
Tit Volume <u>28000</u> 001	Land 506
Depth to ground water (vertical distance from bottom of pit to seasonal	Less than 50 feet (20 points) 4997
high water elevation of ground water.)	50 feet or more, but less than 100 feet (10 points)
	100 feet or more X (0 points) 0
Wellhead protection area: (Less than 200 feet from a private domestic	Yes (20 points)
water source, or less than 1000 feet from all other water sources.)	No X (0 points) 0
	Less than 200 feet (20 points)
Distance to surface water: (horizontal distance to all wetlands, playas,	200 feet or more, but less than 1000 feet (10 points)
irrigation canals, ditches, and perennial and ephemeral watercourses.)	(cr penne)
	1000 feet or more X (0 points) 0
	Ranking Score (Total Points)
If this is a pit closure: (1) Attach a diagram of the facility showing the pit's relationship to other equipment and tanks. (2) Indicate disposal location: (check the onsite box if	
your are burying in place) onsite offsite lif offsite, name of facility (3) Attach a general description of remedial action taken including	
remediation start date and end date. (4) Groundwater encountered: No 🛛 Yes 🔲 If yes, show depth below ground surface	
(5) Attach soil sample results and a diagram of sample locations and excavations.	
Additional Comments:	
I hereby certify that the information above is true and complete to the host of my brought 1. 11. 11. 2. 2. 1.	
I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that the above-described pit or below-grade tank has been/will be constructed or closed according to NMOCD guidelines , a general permit , or an (attached) alternative OCD-approved plan .	
Date: 10/18/06	
Printed Name/Title Cathy Wright, Sr. Eng Tech Signature (Athy White)	
Your certification and NMOCD approval of this application/closure does not relieve the operator of liability should the contents of the pit or tank contaminate ground water or otherwise endanger public health or the environment. Nor does it relieve the operator of its responsibility for compliance with any other federal, state, or local laws and/or	
regulations.	
Approval:	
Approval: Printed Name/Title CHRIS WILLIAMS / DIST. SUN Signature Mus. Williams Date: 16/19/2006	
Printed Name/Title CHRIS WILLIAMS / D/S/. SUN Signature / Mus. Williams Date: 16/19/2006	

Form C-144 June 1, 2004

Pit Closing Procedure:

Pits are dewatered. Dirt contractor digs a deep bury pit adjacent to the drilling pit. Deep bury pit is lined with 12 mil plastic. Dirt contractor pushes contents of drilling pit into the deep bury pit. Deep bury pit is capped with 20 mil plastic then covered with 3 feet of fill dirt.

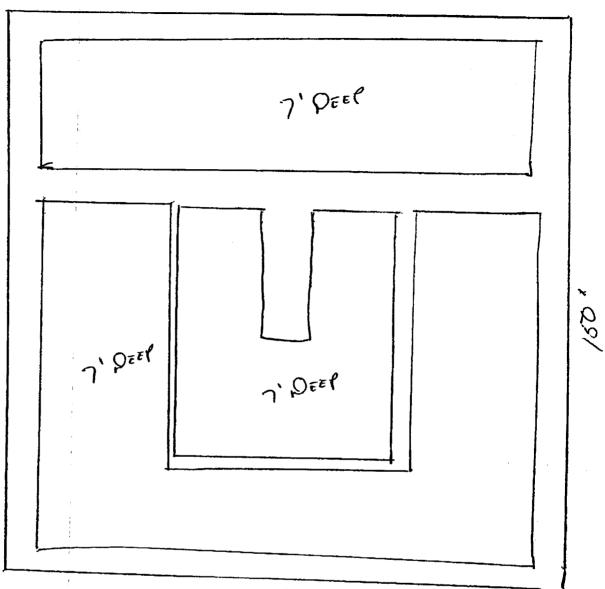

Coston DeAN 94 150'
10 FSL 1150 FWL

SEC 15 T255 R32E (M)

LEA CO
30-025-37594

32:07:23.27

103:40:07.27