

Submit 1 Copy To Appropriate District
 Office
 District I
 1625 N. French Dr., Hobbs, NM 88240
 District II
 1301 W. Grand Ave., Artesia, NM 88210
 District III
 1000 Rio Brazos Rd., Aztec, NM 87410
 District IV
 1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
 Energy, Minerals and Natural Resources

Form C-103
 October 13, 2009

RECEIVED
 AUG 24 2010
 HOBSOCD

OIL CONSERVATION DIVISION
 1220 South St. Francis Dr.
 Santa Fe, NM 87505

WELL API NO. 30-041-10157
5. Indicate Type of Lease STATE <input type="checkbox"/> FEE <input checked="" type="checkbox"/>
6. State Oil & Gas Lease No. 46930
7. Lease Name or Unit Agreement Name Milnesand Unit
8. Well Number MSU # 114
9. OGRID Number 257420
10. Pool name or Wildcat Milnesand (San Andres)
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 4262 DF

SUNDRY NOTICES AND REPORTS ON WELLS
 (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well Gas Well Other

2. Name of Operator
EOR Operating Company

3. Address of Operator
200 N. Loraine, Suite 1440. Midland, TX 79701

4. Well Location
 Unit Letter B : 990 feet from the North line and 1651 feet from the East line
 Section 12 Township 8S Range 34E NMPM County Roosevelt

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:		SUBSEQUENT REPORT OF:	
PERFORM REMEDIAL WORK <input type="checkbox"/>	PLUG AND ABANDON <input checked="" type="checkbox"/>	REMEDIAL WORK <input type="checkbox"/>	ALTERING CASING <input type="checkbox"/>
TEMPORARILY ABANDON <input type="checkbox"/>	CHANGE PLANS <input type="checkbox"/>	COMMENCE DRILLING OPNS. <input type="checkbox"/>	P AND A <input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	MULTIPLE COMPL <input type="checkbox"/>	CASING/CEMENT JOB <input type="checkbox"/>	
DOWNHOLE COMMINGLE <input type="checkbox"/>			
OTHER: <input type="checkbox"/>		OTHER: <input type="checkbox"/>	

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

OCD ACR#-265-A

EOR Operating respectfully request approval to plug and abandon this well according to the attached procedure and wellbore diagram.

Est. Start date: 9/1/10

The Oil Conservation Division **Must be notified 24 hours prior** to the beginning of plugging operations.

Start Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE [Signature] TITLE Sr. Well Operations Supervisor DATE 8/23/10

Type or print name L.A. Spittler, Jr. E-mail address: lspittler@enhancedoilres.com PHONE: 432-688-0303

For State Use Only

APPROVED BY: [Signature] TITLE STATE MGR DATE 8-25-10
 Conditions of Approval (if any):



Milnesand Unit Well # 114
Plug and Abandonment
API#:30-041-10157
Roosevelt Co, NM

Procedure

1. Notify the NM OCD 24 hours in advance prior to commencing plug and abandonment operations. ✓
2. Prepare location. Test anchors.
3. Hold PJSA prior to beginning work each morning and as required for specific operations. ✓
4. MIRU rig. NDWH. TOH w/rods & pump.
5. NU and test BOP's. TOH. Laying down production tbg. ✓
6. RIH w/ 4 ½" CIBP and set CIBP @ 4550'. Dump bail 35' of cement on top of CIBP @ 4550'. Wait on cement and tag. (Plug within 100' of top perforation @ 4609'.)
7. Load well with plugging mud and conduct MIT to 500 psi, test for leak off. Bleed pressure off after MIT. ✓
8. TIH w/tbg to 4450' and spot a 25 sx cement plug. TOH. Wait on cement and tag plug.
9. TIH ~~w/tbg~~ ^{Perf @} to 2716' and ~~spot~~ ^{SP} a 25 sx cement plug. TOH. Wait on cement and tag plug. (Base of salt @ 2666').
10. TIH ~~w/tbg~~ ^{Perf @} to 2240' and ~~spot~~ ^{SP} a 25 sx cement plug. TOH. Wait on cement and tag. (Top of salt @ 2190').
11. TIH ~~w/tbg~~ ^{Perf @} to 429' and ~~spot~~ ^{SP} a 25 sx cement plug. TOH. Wait on cement and tag plug. (8 5/8" csg shoe @ 379'). @325
12. TIH w/tbg and tag plug. Spot cement plug, circulate to surface. TOH.
13. RDMO, Install dry hole marker and cut off dead man. Restore location.

Contacts

Production Supervisor
Marci Galindo
Cell-1-575-703-7787

Milnesand Unit Well # 114
 Plug and Abandonment
 API#:30-041-10157
 Roosevelt Co, NM

Current Wellbore Information

TD: 4700' PBD:4665'
 GL:4249' GR.

Casing	OD	Weight	Depth Set	TOC
Surface	8 5/8"	20#	379'	Surface
Production	4 1/2"	9.5#	4687'	3917'

Perforations	Top Perf	Bot Perf	Status
San Andres	4609'	4644	Open


Formation Tops	Top	Bottom
Red Bed	390'	1754'
Red Bed/Anhy	1754'	2130'
Anhy	2130'	2190'
Salt	2190'	2523'
Anhy/Salt	2523'	2666'
Anhy	2666'	3540'
Anhy/Limestone	3540'	4187'
Limestone	4187'	4590'
Shale/Limestone	4590'	4621'
Limestone	4621'	4700'



EOG
OPERATING COMPANY

PROPOSED P&A WELLBORE DIAGRAM

Milnesand Unit Well # 114
API #: 30-041-10157
UL:B, 990' FNL & 1651' FEL.
Sec 12. T8S-R34E
Roosevelt, NM
Spud date:12/28/63.
Completed date:02/17/58.

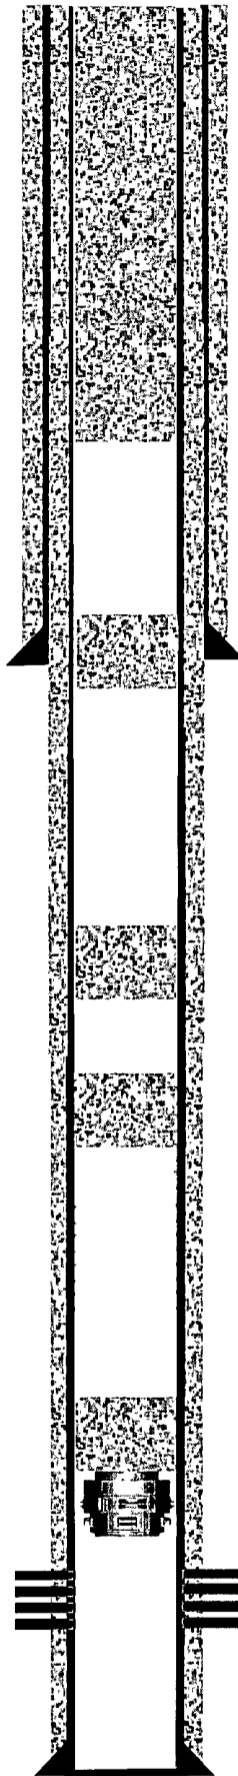

Elev: 4249' GR

Cmt plug from 137' to surface.

8 5/8", 20# csg @ 379'.
cmt w/ 250 sxs.
Circulated to surface.
12 1/4" hole.

25 sx Cmt plug @ 429'.
(8 5/8" csg shoe @ 379')

25 sx Cmt sqz & plug @ 2240'.
(Top of salt @ 2190')

25 Cmt plug @ 2716'.
(Base of salt @ 2666')

TOC @ 3917.
Temp Survey.

4 1/2" CIBP set @ 4550'.
w/ 35' cmt plug on top of CIBP.

Perforations:
4609'-4644' 3/8" hole 1 JSPF

PBTD: 4665'
TD: 4700'

4 1/2", 9.5 cs
cmt w/200 sxs.
7 7/8" hole.

Well Name & Number:	MSU #114	Lease:	Milnesand Unit		
County or Parish:	Roosevelt	State/Prov.	NM	Country:	USA
Prepared By:	L.A. Spittler, Jr.	Last Revision Date:	8/23/2010		




EOR
OPERATING COMPANY

EXISTING WELLBORE DIAGRAM

Elev: 4249' GR

Milnesand Unit Well # 114
 API #: 30-041-10157
 UL:B, 990' FNL & 1651' FEL.
 Sec 12. T8S-R34E
 Roosevelt, NM
 Spud date:12/28/63.
 Completed date:02/17/58.

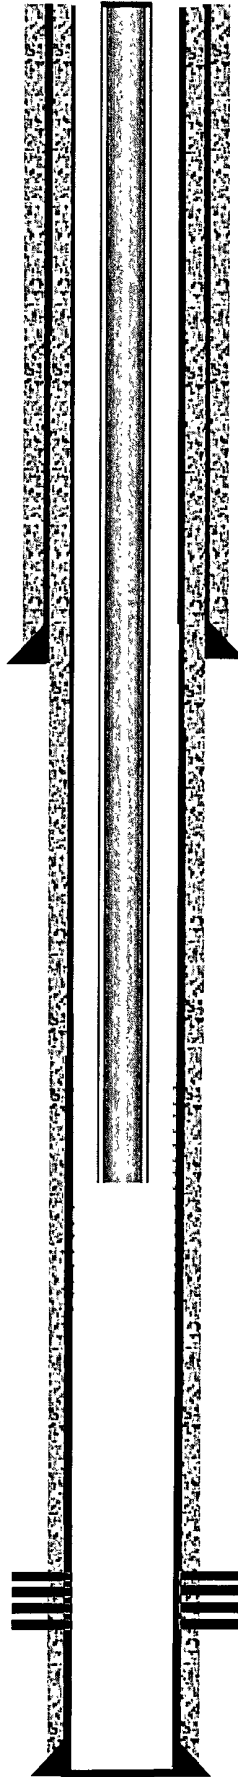

8 5/8", 20# csg @ 379'.
 cmt w/ 250 sxs.
 Circulated to surface.
 12 1/4" hole.

TOC @ 3917.
 Temp Survey.

Perforations:
 4609'-4644' 3/8" hole 1 JSPF

PBTD: 4665'
 TD: 4700'

4 1/2", 9.5 csg @ 4687'.
 cmt w/200 sxs.
 7 7/8" hole.

Well Name & Number:	MSU #114	Lease:	Milnesand Unit		
County or Parish:	Roosevelt	State/Prov.	NM	Country:	USA
Prepared By:	L.A. Spittler, Jr.	Last Revision Date:	8/23/2010		