


NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

1981 FEB 15 PM 3:36
WELL RECORD

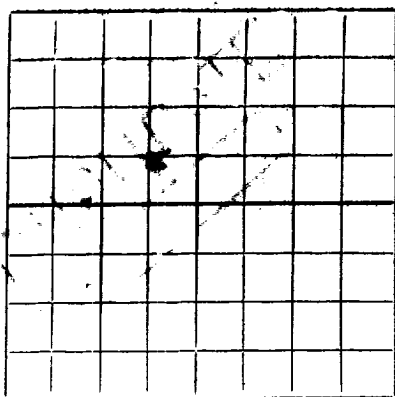

Mail to District Office, Oil Conservation Commission, to which Form C-101 was sent not later than twenty days after completion of well. Follow instructions in Rules and Regulations of the Commission. Submit in QUINTUPLICATE.

Sunray Oil Corporation (Company or Operator) New Mexico State D (Lease)

Well No. 3, in SW 1/4 of NE 1/4, of Sec. 21, T. 12 S, R. 32 E, NMPM.

Undesignated Pool, Lea County.

Well is 1900 feet from North line and 1900 feet from West line

of Section 21. If State Land the Oil and Gas Lease No. is 8-22649

Drilling Commenced January 13, 1955. Drilling was Completed February 8, 1955.

Name of Drilling Contractor: Cactus Drilling Company

Address: San Angelo, Texas

Elevation above sea level at Top of Tubing Head: 4370

The information given is to be kept confidential until Can be released, 19...

OIL SANDS OR ZONES

No. 1, from 3013 to 3036 No. 4, from to

No. 2, from to No. 5, from to

No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 90 to 100 feet.

No. 2, from to feet.

No. 3, from to feet.

No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	NEW OR USED	AMOUNT	KIND OF SHOE	CUT AND PULLED FROM	PERFORATIONS	PURPOSE
13-3/8	36#	New	160'	Tex. Pattern	Cemented to surface		Surface Casing
8-5/8	24	Used	1440	" "	1440'		Intermediate String
5-1/2	15.5	New	3016	Baker Float		Open hole	Oil String

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
17-1/4	13-3/8	166'	165	Pump & Plug	Native	
11	8-5/8	1440	None	Oil Emulsion Mud	circulated	33 bbls
8	5-1/2	3016	175	Pump & Plug	Native	

RECORD OF PRODUCTION AND STIMULATION

(Record the Process used, No. of Qts. or Gals. used, interval treated or shot.)

Open hole 3016 - 3036'. Sand Fraced by Halliburton prior to completion. 562 bbls of oil & 10,000# Ottawa Sand being used. Injection rate 25 BPM @ 2200 PSI.

Result of Production Stimulation: Pumped 80 BOPD - No water.

Depth Cleaned Out: 3036