

State of New Mexico  
Energy, Minerals and Natural Resources Department

**OIL CONSERVATION DIVISION**  
P.O. Box 2088  
Santa Fe, New Mexico 87504-2088

DISTRICT I  
P.O. Box 1980, Hobbs NM 88240  
DISTRICT II  
P.O. Drawer DD, Artesia NM 88210  
DISTRICT III  
1000 Rio Brazos Rd., Aztec NM 87410

|   |
|---|
| WELL APT NO.<br><b>30-025-35410</b>   |
| 5. Indicate Type of Lease<br>State <input checked="" type="checkbox"/> FEE <input type="checkbox"/> |
| 7. Lease Name or Unit Agreement Name<br><b>Koala AXZ State</b>                                      |
| 8. Well No.<br><b>1</b>   |
| 9. Pool Name or Wildcat<br><b>Wildcat Devonian</b>  |

**SUNDRY NOTICES AND REPORTS ON WELLS**  
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

OIL WELL  GAS WELL  OTHER

1. Name of Operator  
**Yates Petroleum Corporation**

2. Address of Operator  
**105 South 4th., Artesia, NM 88210**

3. Well Location  
Unit Letter **A** : **990** Feet From The **North** Line and **330** Feet From The **East** Line  
Section **19** Township **T12S** Range **R35E** NMPM **Lea** COUNTY

10. Elevation (Show whether DF, RKB, RT, GR, etc.)  
**4114' GR**

11. Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data

**NOTICE OF INTENTION TO:**

PERFORM REMEDIAL WORK  PLUG AND ABANDON

TEMPORARILY ABANDON  CHANGE PLANS

PULL OR ALTER CASING

OTHER \_\_\_\_\_

**SUBSEQUENT REPORT OF:**

REMEDIAL WORK  ALTERING CASING

COMMENCE DRILLING OPNS.  PLUG AND ABANDONMENT

CASING TEST AND CEMENT JOB


OTHER Production casing

12. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work) SEE RULE 1103.

TD 13950' Ran 5-1/2" casing. Plug down @ 2:45 pm 8-13-2001. Ran 329 jts casing set at 13950' as follows:

- 61 jts 5-1/2" 20# P110 LTC
- 35 jts 5-1/2" 17# P110 8R LTC
- 200 jts 5-1/2" 17# L-80 8R LTC
- 30 jts 5-1/2" 17# P110 8R LTC
- 3 jts 5-1/2" 20# P110 8R LTC

Float shoe set @ 13950', float collar set @ 13905'. Top marker set @ 12023', bottom marker set at 12998'. Cemented with 50 bbls mud w/150 SCF/bbl N2 + 375 sx Super "H" w/5# gilsonite + 1# salt + .5% Halad-344 + 4% CFR-3 + .2% HR-7 (yld 1.67, wt 13). PD @ 2:45 pm 8-13-2001. Bumped plug to 2380 psi for 3 min, held OK. TOC calculated to 11200'.

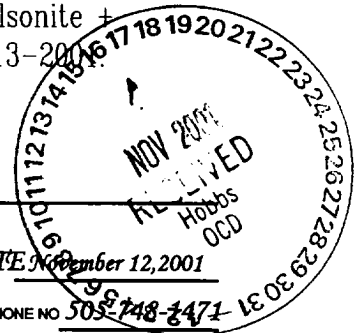

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Donna Clack TITLE Operations Technician

DATE November 12, 2001

TYPE OR PRINT NAME Donna Clack

TELEPHONE NO 505-748-2471

(This space for Sales Use)

APPROVED BY \_\_\_\_\_ TITLE \_\_\_\_\_ DATE \_\_\_\_\_

CONDITIONS OF APPROVAL, IF ANY:

1255