

Submit 3 Copies  
to Appropriate  
District Office

State of New Mexico  
Energy, Minerals and Natural Resources Department

Form C-103  
Revised 1-1-89

DISTRICT I  
P.O. Box 1980, Hobbs, NM 88240

OIL CONSERVATION DIVISION  
P.O. Box 2088  
Santa Fe, New Mexico 87504-2088

DISTRICT II  
P.O. Drawer DD, Artesia, NM 88210

DISTRICT III  
1000 Rio Brazos Rd., Aztec, NM 87410

|                                      |  |
|--------------------------------------|--|
| WELL API NO.                         | 30-025-30542   |
| 5. Indicate Type of Lease            | STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/> |
| 6. State Oil & Gas Lease No.         | V-988  |
| 7. Lease Name or Unit Agreement Name | Victorio State   |
| 8. Well No.                          | 1  |
| 9. Pool name or Wildcat              | Shipp Strawn   |

SUNDRY NOTICES AND REPORTS ON WELLS  
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A  
DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT"  
(FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well:  
OIL WELL  GAS WELL  OTHER

2. Name of Operator  
Siete Oil and Gas Corporation

3. Address of Operator  
P.O. Box 2523, Roswell, NM 88202-2523

4. Well Location  
Unit Letter L : 1650 Feet From The South Line and 660 Feet From The West Line  
Section 31 Township 16S Range 38E NMPM Lea County

10. Elevation (Show whether DF, RKB, RT, GR, etc.)

11. Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data

|  |  |   |   |
|--|--|---|---|
| NOTICE OF INTENTION TO:                        |  | SUBSEQUENT REPORT OF:                               |   |
| PERFORM REMEDIAL WORK <input type="checkbox"/> | PLUG AND ABANDON <input checked="" type="checkbox"/> | REMEDIAL WORK <input type="checkbox"/>              | ALTERING CASING <input type="checkbox"/>      |
| TEMPORARILY ABANDON <input type="checkbox"/>   | CHANGE PLANS <input type="checkbox"/>                | COMMENCE DRILLING OPNS. <input type="checkbox"/>    | PLUG AND ABANDONMENT <input type="checkbox"/> |
| PULL OR ALTER CASING <input type="checkbox"/>  |  | CASING TEST AND CEMENT JOB <input type="checkbox"/> |   |
| OTHER: <input type="checkbox"/>                |  | OTHER: <input type="checkbox"/>                     |   |

12. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work) SEE RULE 1103.

Siete Oil and Gas Corporation intends on plugging the above captioned well as follows, also enclosed is a wellbore diagram showing well information and where the plugs will be set.

- 1) Set CIBP @ 11550'+-, dump <sup>35'</sup> 10' cmt on top/CIBP.
- 2) Cut Csg off @ 7550'+- or freepoint, lay dn csg. <sup>10 lb PAWNE</sup>
- 3) TIH w/2 7/8" tbg to 7600', load hole w/fresh water containing 25# gel/bbl.
- 4) set 1st plug @ 7600' to 7500' w/30 sxs "H" cmt 50' above & below 5 1/2" csg.
- 5) set 2nd plug @ 4550' to 4450' w/50 sxs "H" cmt 50' above & below 8 5/8" csg.
- 6) set 3rd plug @ 470' to 370' w/30 sxs "H" cmt inside 8 5/8" csg to cover 13 3/8" shoe @ 420'.
- 7) set 4th plug @ surface w/10 sxs "H" cmt.
- 8) Install dry hole marker w/legal description, level pit area, fill cellar, clean location.

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Harold D. Justice TITLE Executive Vice President DATE 9/10/91

TYPE OR PRINT NAME \_\_\_\_\_ TELEPHONE NO. \_\_\_\_\_

(This space for State Use) Orig. Signed by Paul Kautz Geologist

APPROVED BY \_\_\_\_\_ TITLE \_\_\_\_\_ DATE SEP 13 1991

CONDITIONS OF APPROVAL, IF ANY:

# SIETE OIL & GAS CORPORATION

WELL: VICTORIO STATE #1  
 FIELD: ATOKA (MLDCAT)  
 INTERVAL: STRAWN  
 Comp: 4/4/89  
 IP: 154 BOPD, 304 MCFGPD, 6 BWPD  
 Spudded: 17 1/2" HOLE ON 1/31/89

LOCATION:  
 1650 FSL & 660' FWL  
 SEC 31, T16S, R38E  
 LEA COUNTY, NM

API #: 30-025-30542


Plug @ surface – 30' w/10 sxs  
 & Dry Hole Marker

Plug @ 370'–470' w/30 sxs  
 inside 8 5/8", above & below  
 13 3/8" shoe

Plug @ 4450'–4550' w/50 sxs  
 above & below 8 5/8"

Plug 7500'–7600' w/30 sxs, 50'  
 below stub & 50' above, tag plug

Dump 10' cement on T/CIBP  
 Set CIBP @ 11550'

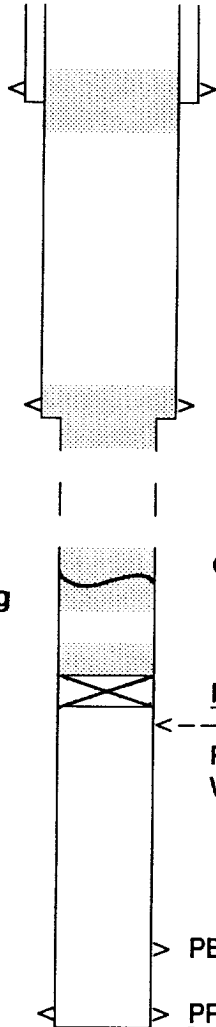

SURFACE CASING:  
 RAN 10 JTS 48# CSG, SET @ 420'. CMT W/170 SXS.

INTERMEDIATE CASING:  
 RAN 48 JTS 32# (2016') + 59 JTS 24# (2487') set @ 4500'.  
 CMT W/1600 SXS, TAIL-IN W/200 SXS.

Cut off 5 1/2" casing @ 7550'

PRESENT COMPLETION INTERVAL:  
 STRAWN  
 PERFED INTERVAL 11,566–11,789' (33 SHOTS). ACID  
 W/5000 GAL.

PBTD 11880'

PRODUCTION CASING:  
 RAN 83 JTS 17# CSG, SET @ 11950'. CMT W/1060 SXS.

NOTE: All plugs set w/class "H" cement

DRAWN BY: CBS  
 DATE: September 10, 1991

TD: 11950'  
 PBTD: 11880'